


## Dimensions: mm (In.)

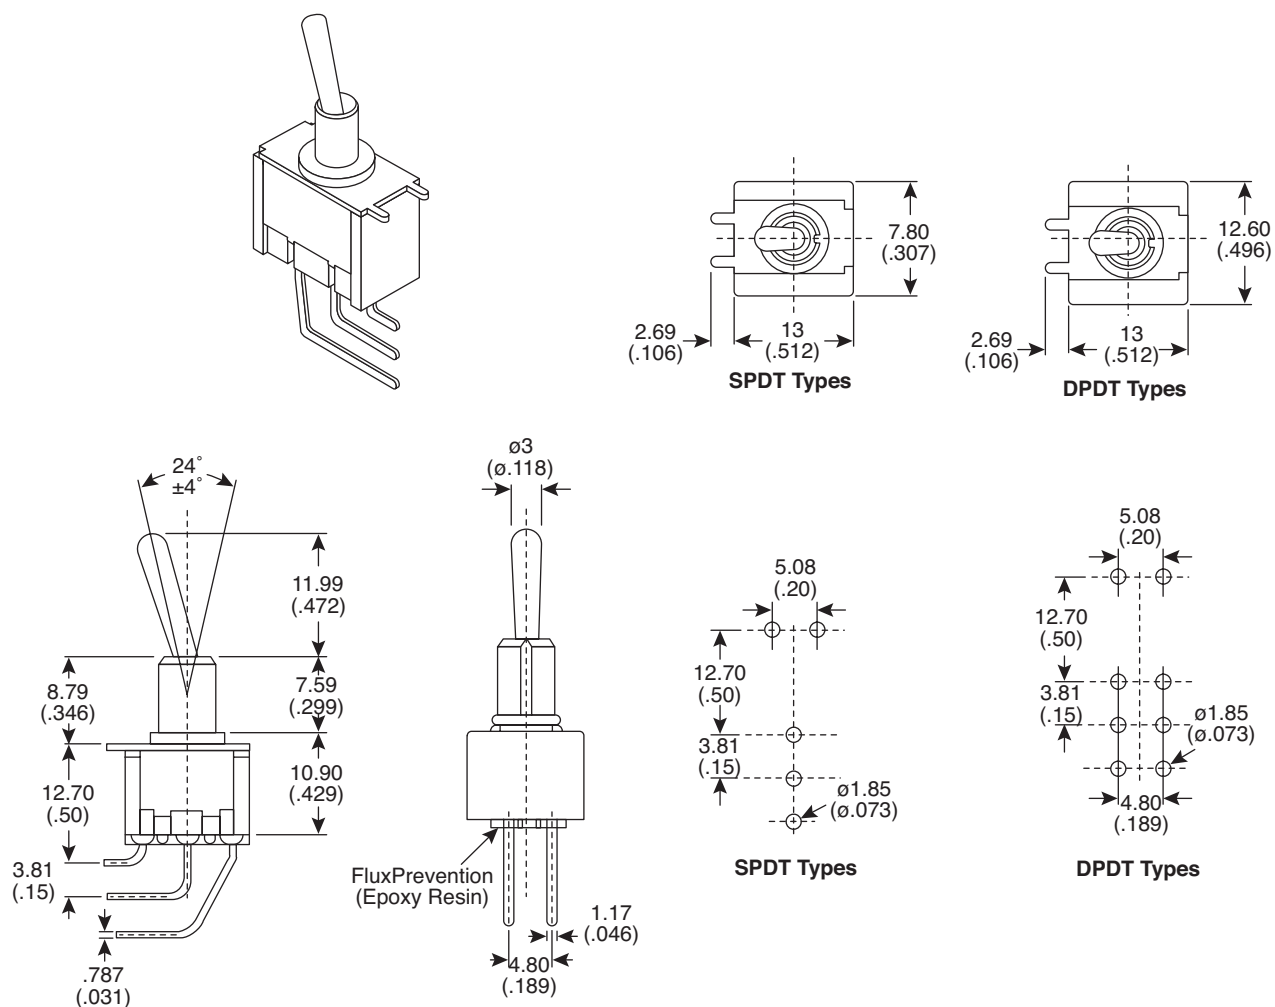

() = Momentary Contact

| Mouser Stock No. | Type | Circuit       |
|------------------|------|---------------|
| 10TF130          | SPDT | On-On         |
| 10TF132          | SPDT | On-(On)       |
| 10TF135          | SPDT | On-Off-On     |
| 10TF140          | SPDT | On-Off-(On)   |
| 10TF145          | SPDT | (On)-Off-(On) |
| 10TF160          | DPDT | On-On         |
| 10TF162          | DPDT | On-(On)       |
| 10TF165          | DPDT | On-Off-On     |
| 10TF170          | DPDT | On-Off-(On)   |
| 10TF175          | DPDT | (On)-Off-(On) |

**Electrical Specifications:**

- Rating: 6A/125VAC, 3A/250VAC
- Dielectric Strength: 1000VAC for 1 minute
- Insulation resistance: 100MΩ min.
- Contact resistance: 20mΩ max.
- Electrical life: 10,000 cycles min.

**Mechanical Specifications:**

- Mechanical life: 30,000 cycles min.

**Materials:**

- Terminals: gold plated

**Miniature Toggle Switches**

10TF130, 10TF132, 10TF135, 10TF140, 10TF145,  
10TF160, 10TF162, 10TF165, 10TF170, 10TF175

**Mountain  
Switch**