


D

C

B


A

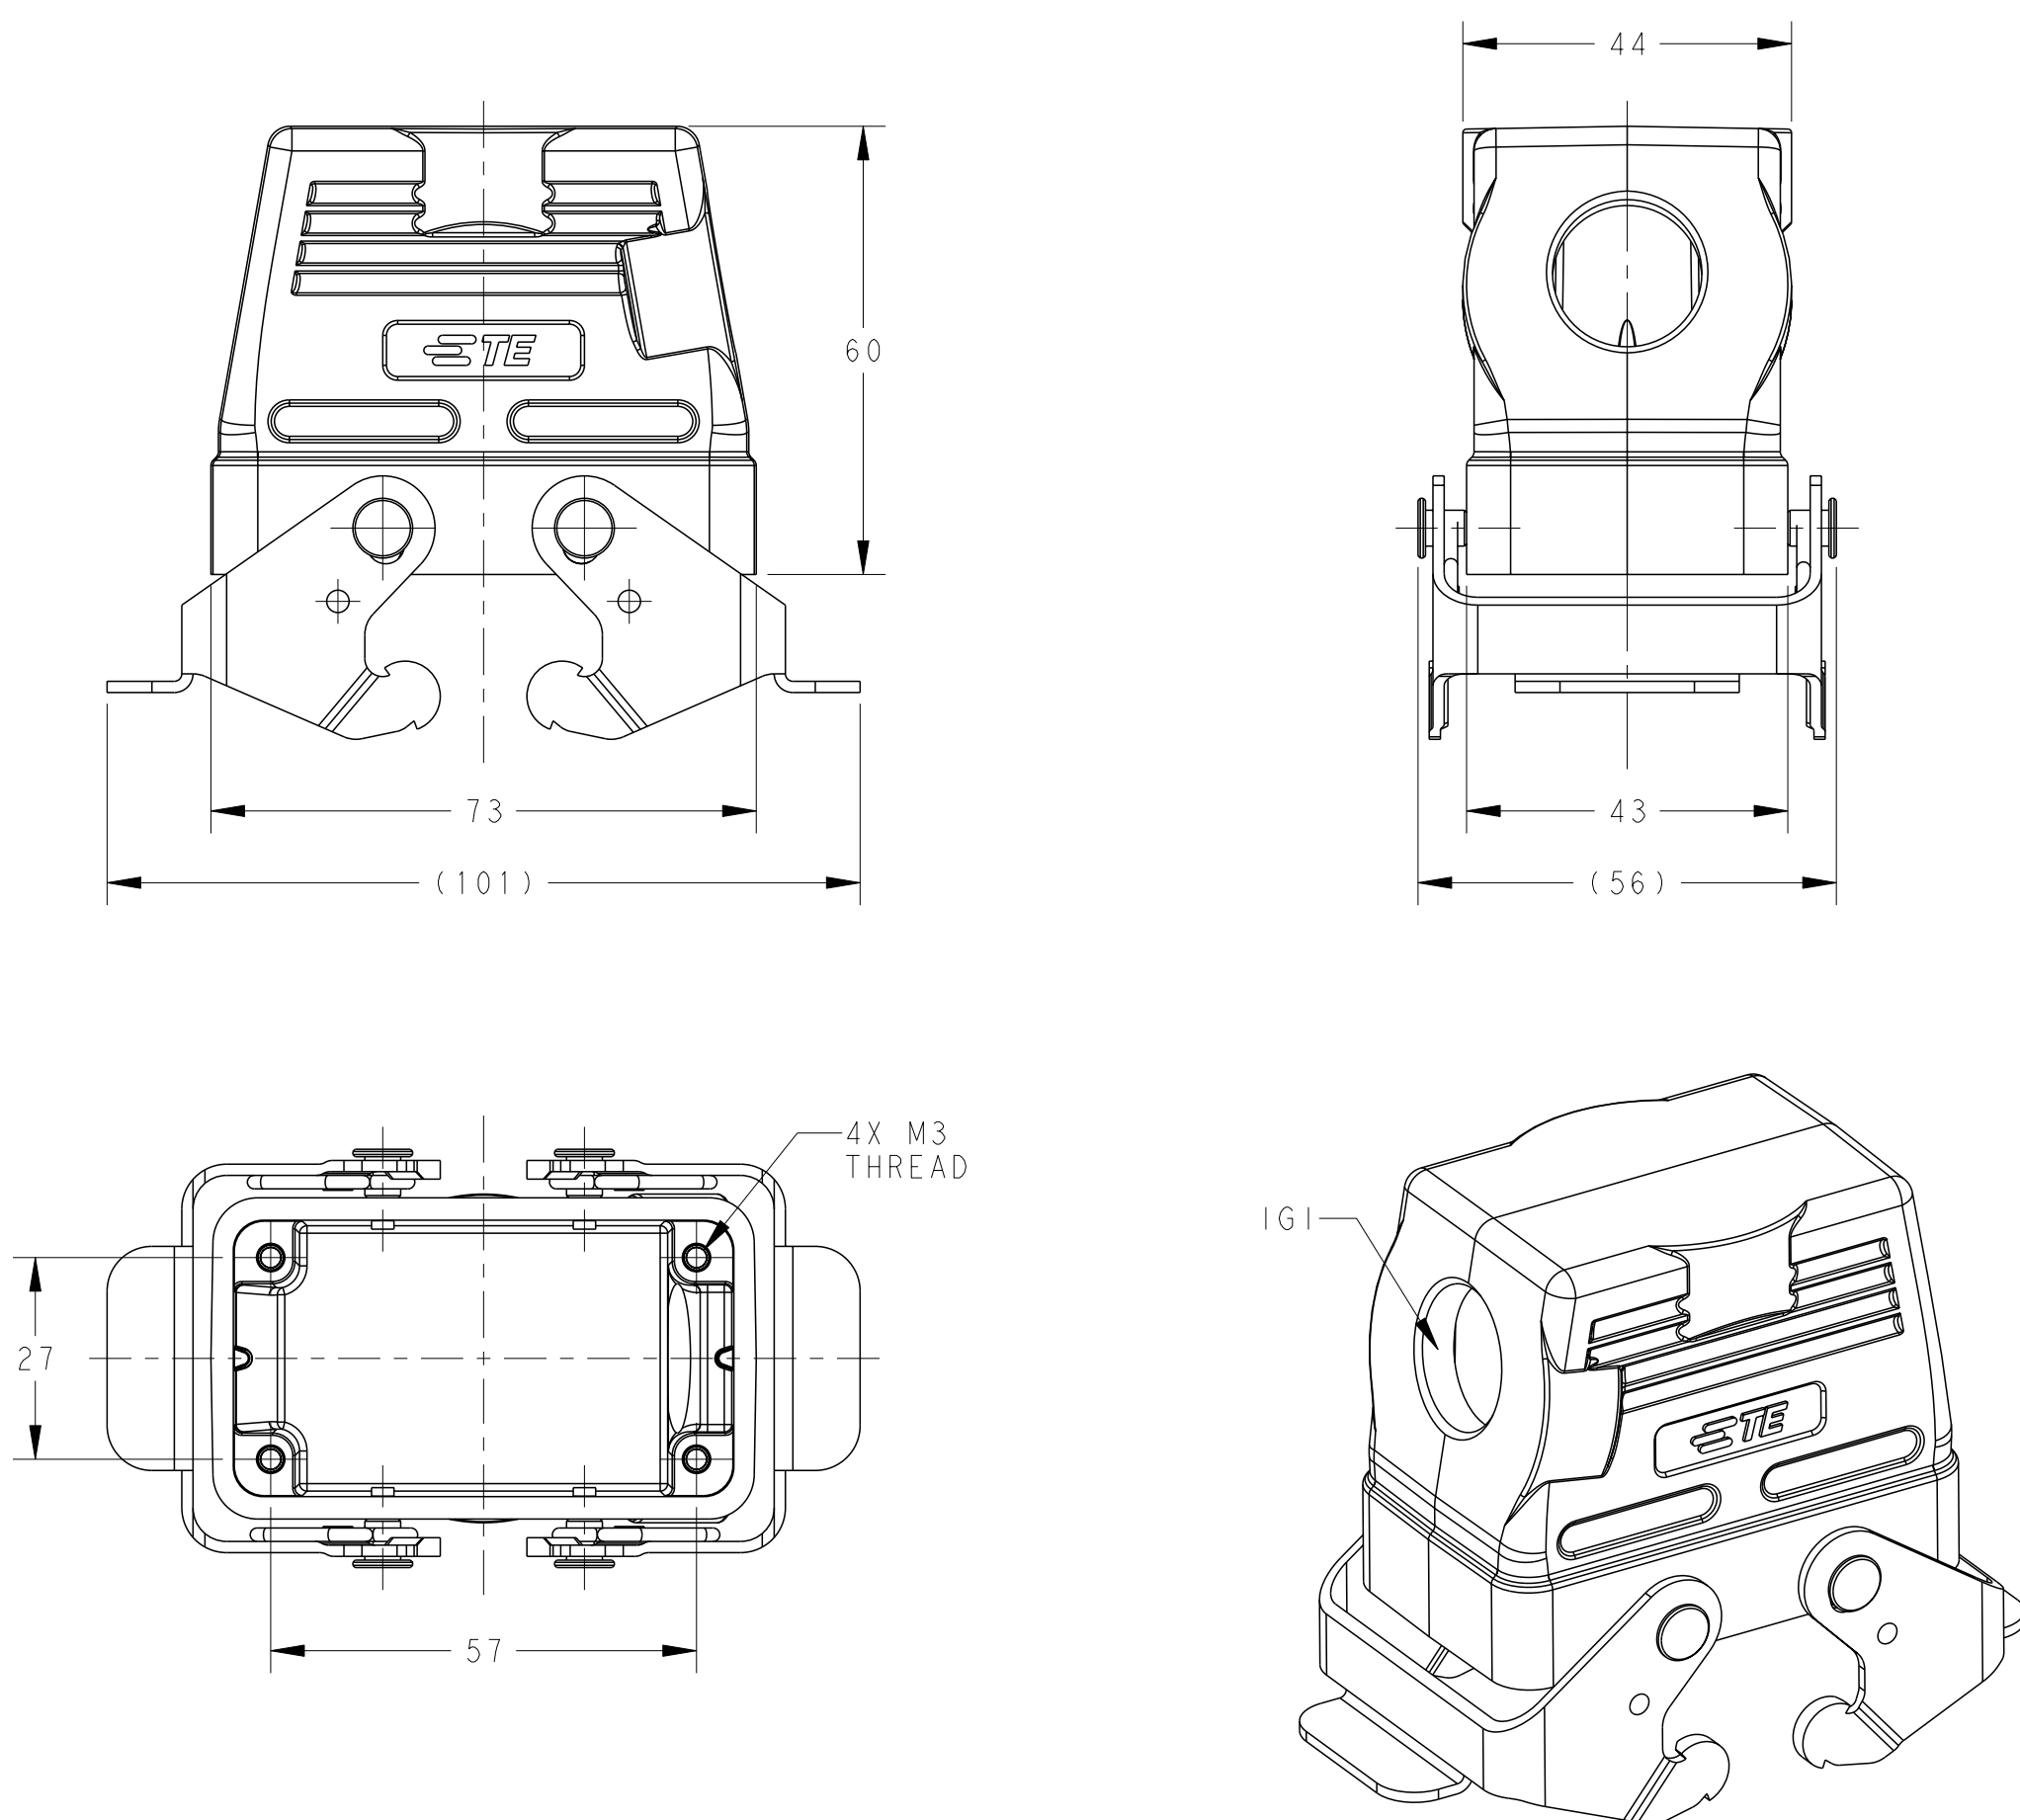

TYPE 1: LOW CONSTRUCTION, SIDE ENTRY
WITH STEEL LOCKING

NOTES:
1. TECHNICAL CHARACTERISTICS:
HOOD MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE: POWDER COATED, GREY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
上壳材料: 铝合金
表面处理: 粉末涂层, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

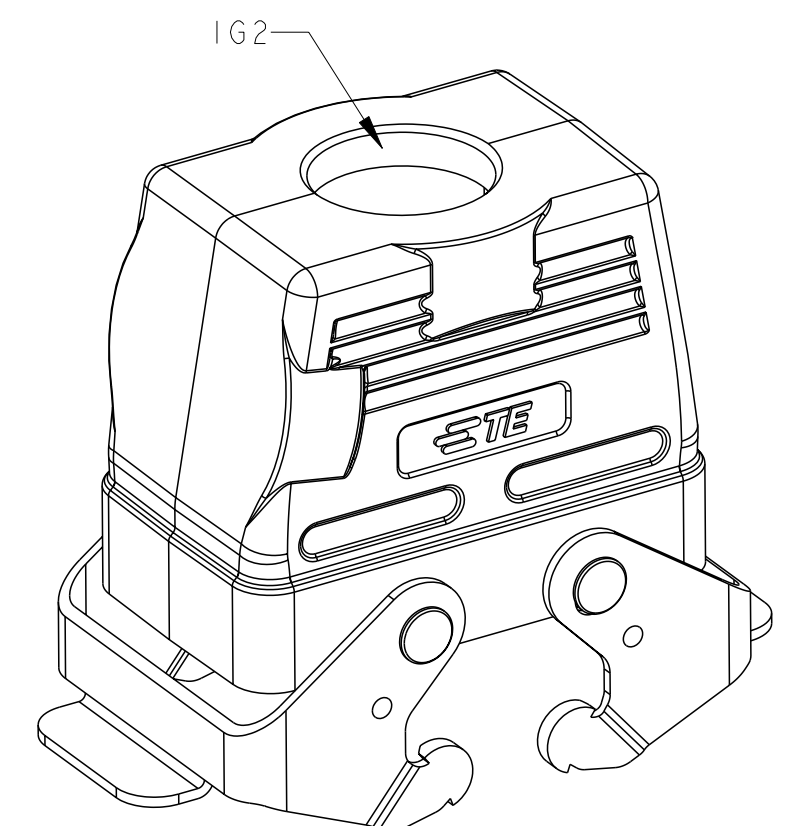

TYPE 2: LOW CONSTRUCTION, TOP ENTRY
WITH STEEL LOCKING
OTHER SPEC REFER TO TYPE 1

T1250102116-000	TYPE 1	H10B-TSB-PG16	PG16	-
T1250102120-000		H10B-TSB-M20	M20	-
T1250102125-000		H10B-TSB-M25	M25	-
T1260102116-000	TYPE 2	H10B-TGB-PG16	-	PG16
T1260102120-000		H10B-TGB-M20	-	M20
T1260102121-000		H10B-TGB-PG21	-	PG21
T1260102125-000		H10B-TGB-M25	-	M25
PART NUMBER	TYPE	DESCRIPTION	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

24JUN2015

David Wang

CHK

24JUN2015

Chris Wang

APVD

24JUN2015

Xiang Xu

PRODUCT SPEC

108-137013

APPLICATION SPEC

114-137013

WEIGHT

-

Customer Drawing

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±-

1 PLC ±-

2 PLC ±-

3 PLC ±-

4 PLC ±-

ANGLES ±-

FINISH

-

-

TE Connectivity

H10B-TSB/TGB/TSBH/TGBH-M/PG

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A200779

C

T12X01021XX000

-

SCALE

1:1

SHEET

1

OF

2

REV






A

D

C

B

A

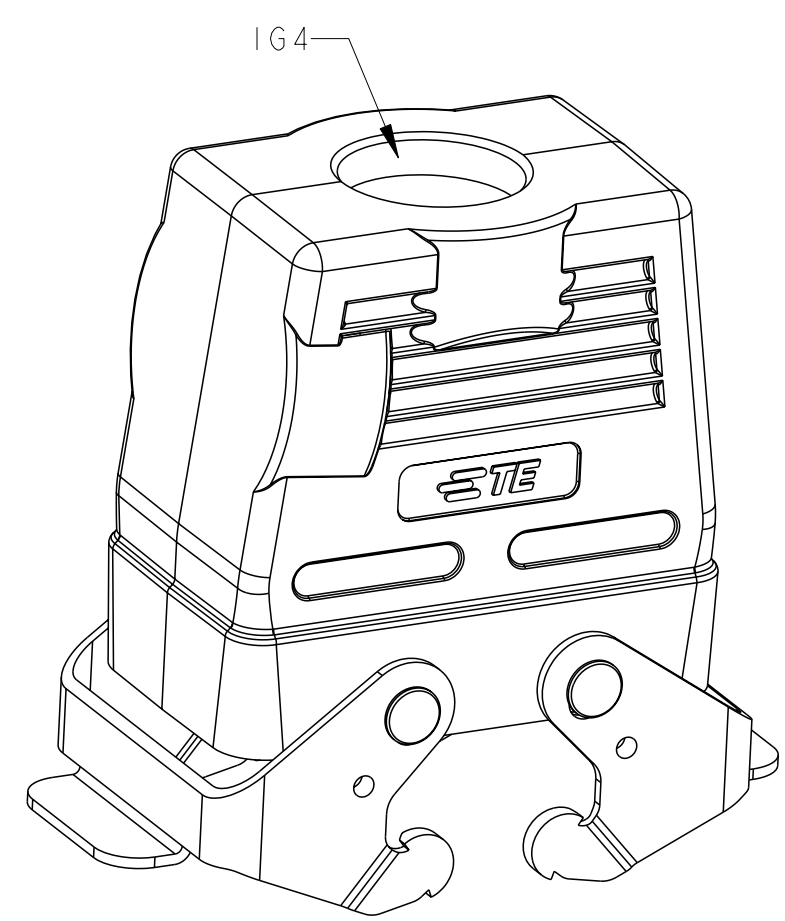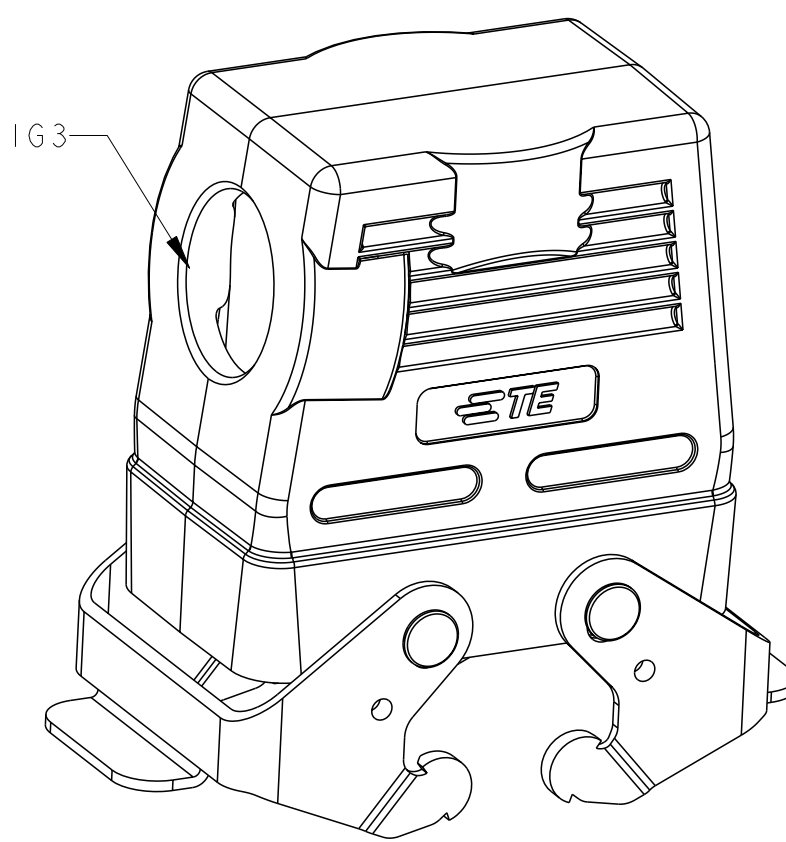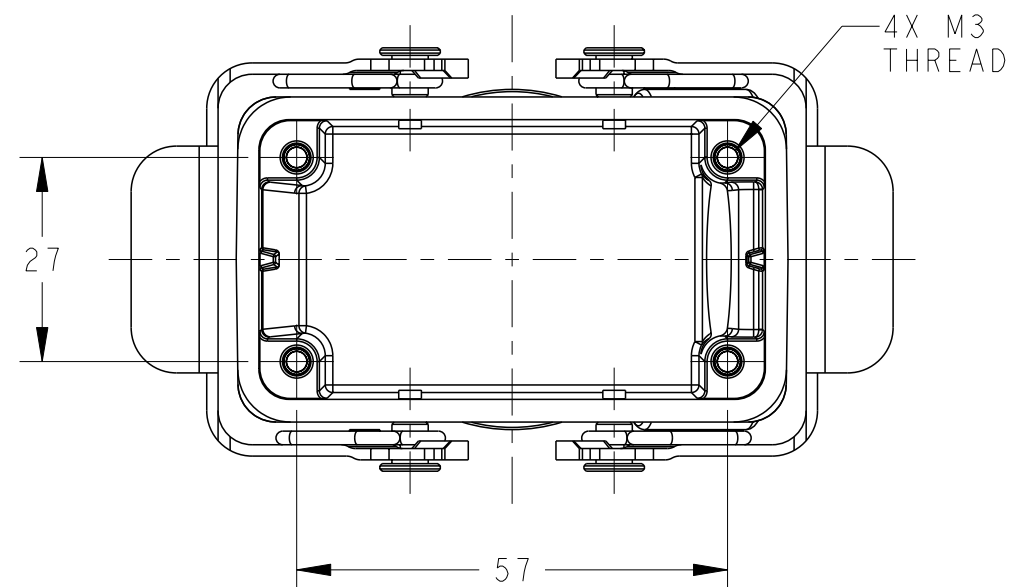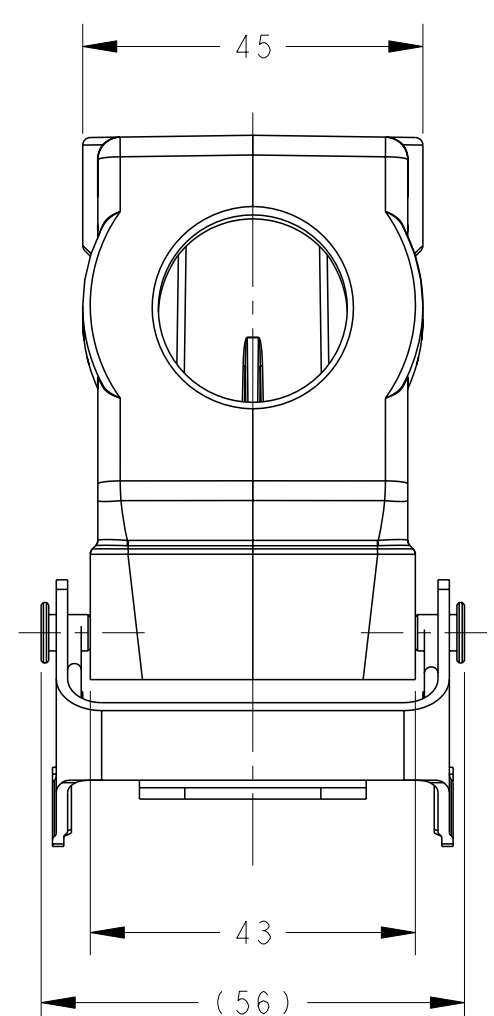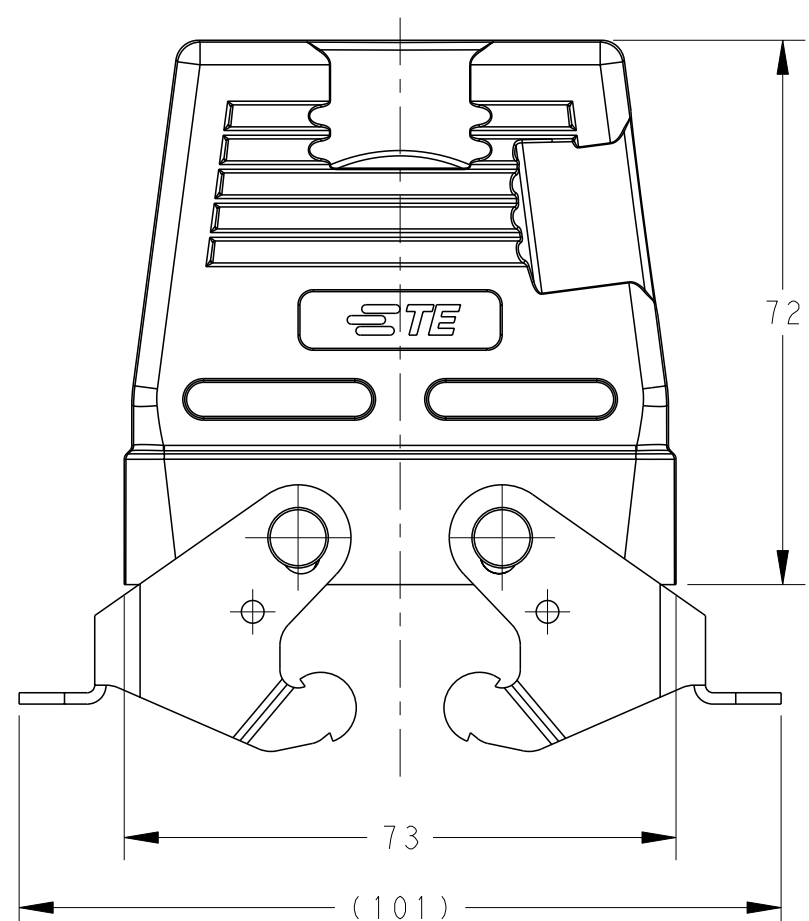

NOTES:
SEE SHEET 1

TYPE 4: HIGH CONSTRUCTION, TOP ENTRY
WITH STEEL LOCKING
OTHER SPEC REFER TO TYPE 3

TYPE 3: HIGH CONSTRUCTION, SIDE ENTRY
WITH STEEL LOCKING

T1270102121-000	TYPE 3	H10B-TSBH-PG21	PG21	-
T1270102125-000		H10B-TSBH-M25	M25	-
T1270102129-000		H10B-TSBH-PG29	PG29	-
T1270102132-000		H10B-TSBH-M32	M32	-
T1270102140-000		H10B-TSBH-M40	M40	-
T1280102121-000	TYPE 4	H10B-TGBH-PG21	-	PG21
T1280102125-000		H10B-TGBH-M25	-	M25
T1280102129-000		H10B-TGBH-PG29	-	PG29
T1280102132-000		H10B-TGBH-M32	-	M32
PART NUMBER	TYPE	DESCRIPTION	IG3	IG4

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN24JUN2015David Wang

CHK24JUN2015Chris Wang

APVD24JUN2015Xiang Xu

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±

3 PLC ±

4 PLC ±

ANGLES ±

FINISH

PRODUCT SPEC108-137013

APPLICATION SPEC114-137013

WEIGHT-

Customer Drawing

TE Connectivity

NAMEH10B-TSB/TGB/TSBH/TGBH-M/PG

SIZEA2

CAGE CODE00779

DRAWING NOC-T12X01021XX000

RESTRICTED TO-

SCALE1:1

SHEET2 OF 2

REV A