
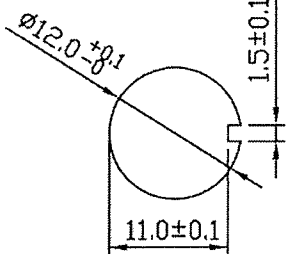

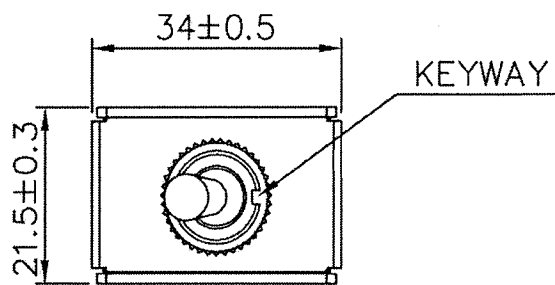
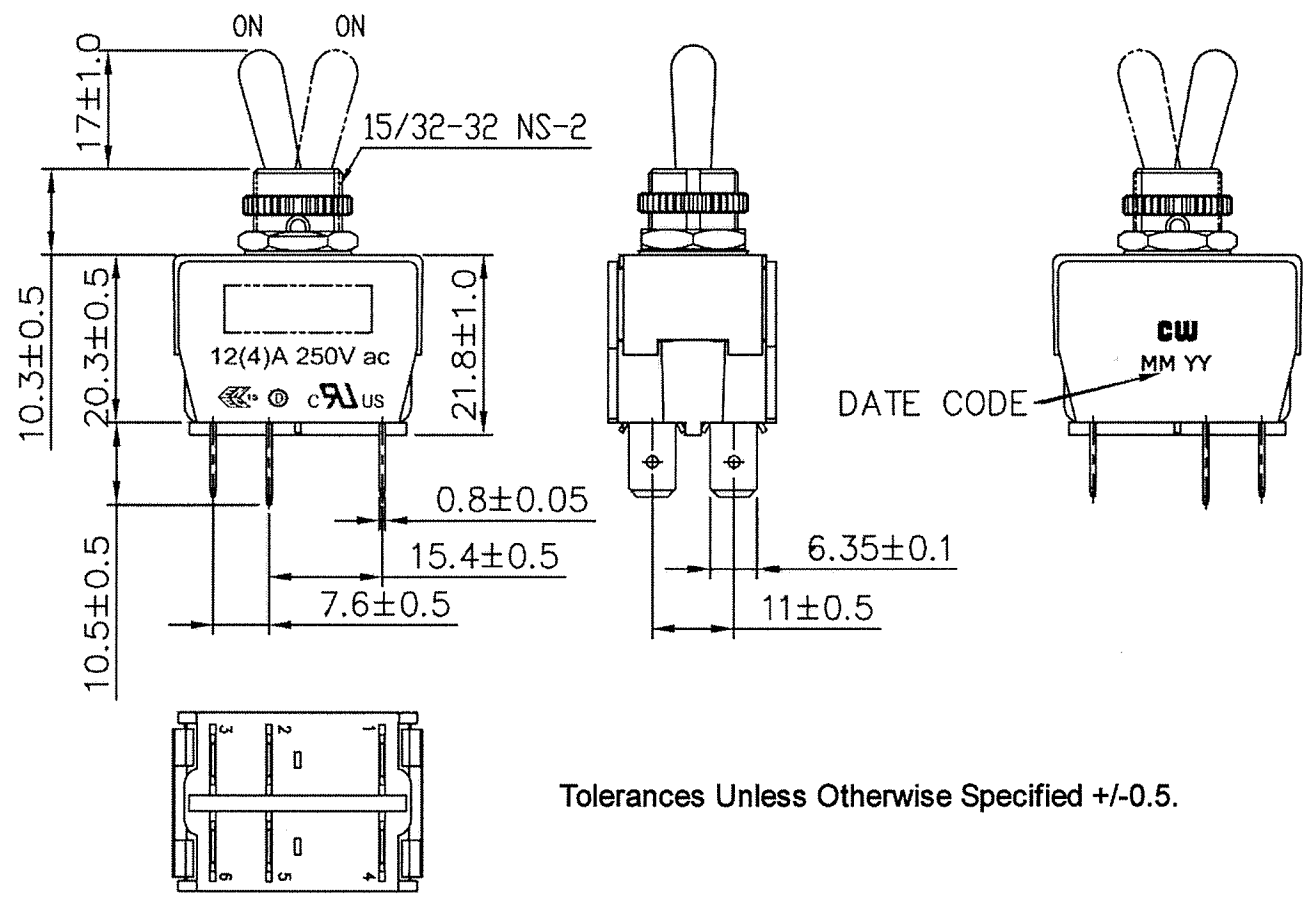


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.


Rating	12(4)A 250V ac  US	Mounting Hole 	Circuit Diagram 
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Switch Function	6P DPDT ON-ON		
Operation Temperature	0°0~85°C		



MATERIAL:
 Frame: Nylon 66, Black
 UL Flame: 94-V2
 Lever: Metal
 Cover PA#66+30%GF A0520
 UL Flame: 94-V0
 Terminal: Copper Alloy
 Contact: Copper Alloy
 Waterproof: IP56



Tolerances Unless Otherwise Specified +/-0.5.

RoHS Compliant		4 Redrawn. Removed 16A 277vac rating & added 12(4)A 250vac & listings. 8/09/12.			
 INDUSTRIES Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com	Date Drawn: 1/28/11	Rev. 4	Unit: mm	Checked By: <i>G. Gold</i>	
	Title: TOGGLE SWITCH		CW P/N: GTS448B101A1HR		