




## DeviceNet Receptacles, Panel Feed Through, 7/8"

0906 UAC 301 | 0906 UAC 302 | 0906 UAC 303

### 5-Pole, Male

DeviceNet, 3-, 4-, and 5-pole, male to female 7/8" panel feed through receptacle.


### 0906 UAC 303

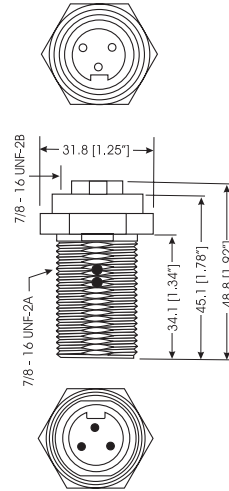


### Pin Assignments

Face Views, 7/8"


3 pole



4 pole



5 pole





Be Certain with Belden

**DeviceNet Receptacles, 7/8"**

0906 UAC 301 | 0906 UAC 302 | 0906 UAC 303

**Technical Data**

**Environmental**

Degree of protection IP 67 / NEMA 6P  
 Operating temperature range -25°C (-13°F) / +90°C (+194°F)

**Materials**

Contacts Brass, gold over nickel plated  
 Insert PUR, yellow  
 O-ring Viton  
 Shell Brass, nickel plated  
 Panel nut Zinc diecast, zinc plated

**Electrical**

Current rating 8 A  
 Voltage rating 600 V

Part Number	Pins	Characteristics
0906 UAC 301	3	
0906 UAC 302	4	
0906 UAC 303	5	