


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	T5	REVISED PER ECR-17-009545	08AUG2017	AS	RS

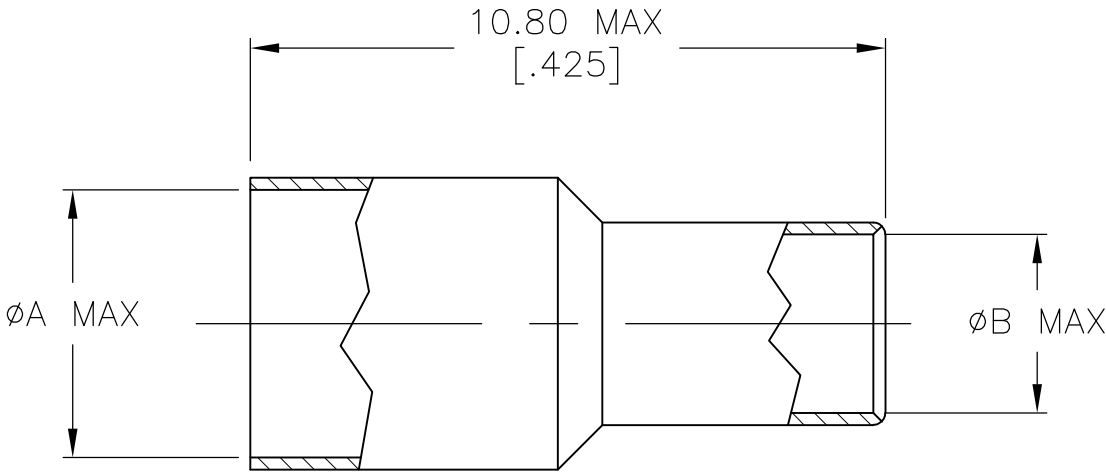

- 1

SILVER PLATE PER QQ-S-365
5.08 μm [.000200] MINIMUM THICK.
- 2

TIN-LEAD PLATE PER ASTM-B-545
2.54 μm [.000100] MINIMUM THICK,
WITH SUPPLEMENTAL ANTI FRETTING LUBRICANT.
- 3

GOLD PLATE PER MIL-G-45204
0.76 μm [.000030] MINIMUM THICK.
- 4

MATTE TIN PLATE PER ASTM-B-545
2.54 μm [.000100] MINIMUM THICK,
WITH SUPPLEMENTAL ANTI FRETTING LUBRICANT.
- 5

BRIGHT TIN PLATE PER ASTM-B-545
2.54 μm [.000100] MINIMUM THICK,
WITH SUPPLEMENTAL ANTI FRETTING LUBRICANT.
- 6

328666 REPLACED BY 9-328666-3

	3.05	[.120]	4.55	[.179]	5	9-328666-4
	3.05	[.120]	3.86	[.152]	1	9-328666-3
	3.73	[.147]	4.55	[.179]	4	9-328666-2
	3.05	[.120]	3.86	[.152]	4	9-328666-1
	3.05	[.120]	4.55	[.179]	4	9-328666-0
	3.40	[.134]	4.55	[.179]	2	3-328666-9
	5.03	[.198]	5.51	[.217]	2	3-328666-6
OBSOLETE	3.73	[.147]	4.55	[.179]	2	3-328666-3
	3.05	[.120]	3.86	[.152]	2	2-328666-7
	3.05	[.120]	4.55	[.179]	3	2-328666-6
OBSOLETE	3.05	[.120]	4.55	[.179]	2	2-328666-5
	3.05	[.120]	4.55	[.179]	1	2-328666-3
6 OBSOLETE	3.05	[.120]	3.86	[.152]	1	328666
	B		A		FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. LIPPERT 28MAR01		TE TE Connectivity			
		CHK R.E.RUTH 7/27/90					
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		0 PLC ± -		FERRULE			
		1 PLC ± -					
		2 PLC ± -					
		3 PLC ± -					
4 PLC ± -		APVD M. SNEED 7/27/90					
		PRODUCT SPEC					
		—					
		APPLICATION SPEC					
		—					
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
COPPER ALLOY		SEE TABLE		—	—	—	—
				WEIGHT			
				0.000000			
				CUSTOMER DRAWING			
				SCALE		SHEET	REV
				1:1		1 OF 1	T5