RPTC2004-100 TEMPEST/COTS AC 3PH, WYE EMI Power Line Filter

RPTC2004-100
TEMPEST/ COTS
3 PHASE, 100A, 480V
100dB
14K -10GHz

SPECIFICATIONS

Operating Freq.	:	47-63Hz
Max. Operating Voltage	:	480VAC
Ambient Temperature	:	-40 to 70C
Hipot Rating (L-G)	:	1500VDC
Terminals (-T)	:	S: 1/4-20
Applications	:	TEMPEST/Mil-461/ DO-160
Typ. Weight, LBS (KG)	:	50.00 (22.68)

MECHANICAL

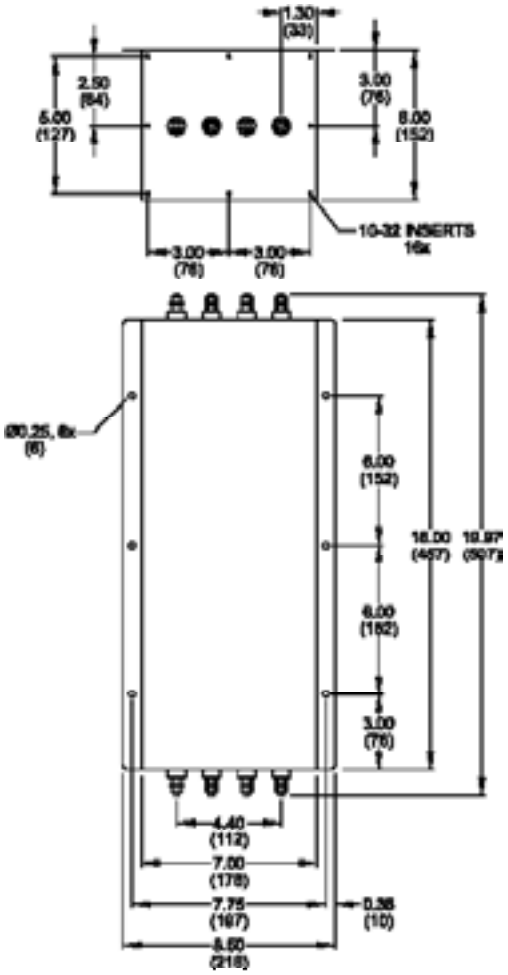

TYPICAL TOLERANCE: +/-0.02 (0.50)

SCHEMATIC

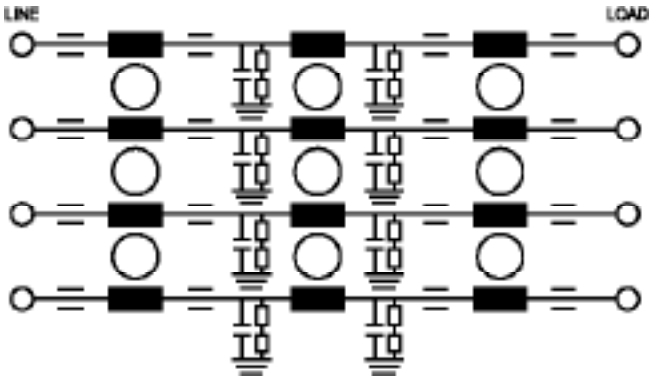

Reference purposes only.
Specifications are subject to change.
Consult factory to verify specifications.

www.radiuspower.com
www.astrodyne.com
Email:Emifiltercs@astrodyne.com