





REV.	ECN NO.	DATE	SIGN	DESCRIPTION




5 Sealing Nut




4 Clamp Ring






3 Seals B2



2 Seals B1

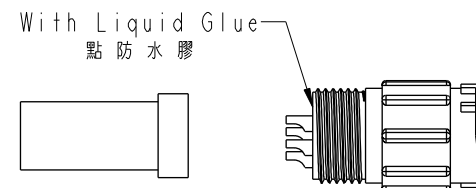

1 Connector

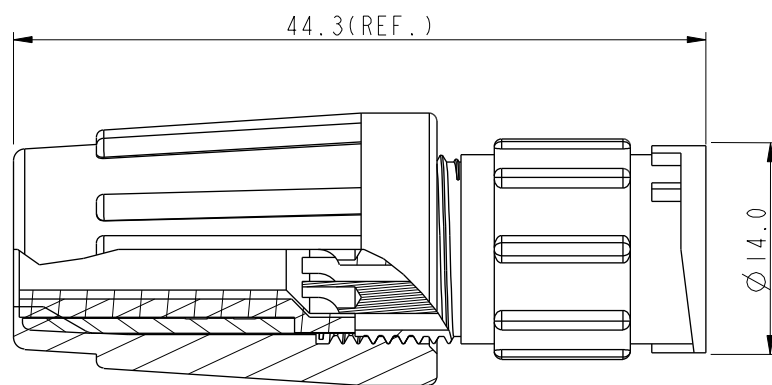Pin Assignments
Front View 前視圖

Note:

- * Seals B1 for Cable OD: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$
(防水墊圈B1線徑: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$)
- * Seals B2 for Cable OD: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$
(防水墊圈B2線徑: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$)
- * One Set Unassembled in One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)
- * Important Dimension.
- * Waterproof Rate : IP66
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Seals: Black, EPDM
- * Clamping Ring: Black, Nylon
- * Sealing Nut: Black, Nylon
- * PE Bag: 90mm*85mm
- * Liquid Glue: Clear

UNIT: mm				TITLE		ITEM NO.	DRAWN BY	DATE
TOLERANCE		SCALE		SIZE		DWG NO.	CHECKED BY	DATE
.X ±0.25		1:1		A4		BD-06BMMA-LL6001	SamChang	2012-03-26
.XX ±0.1		REV. A		WC-REV. A.2		BD-06BMMA-LL6001	Jeffrey	2012-04-03
.XXX ±0.05		QC: Inspection item		SHEET 1 OF 1		CUSTOMER	APPROVED BY	DATE
ANGLES ±1°		ALTW		Lion				2012-04-03

Amphenol LTW
安費諾亮泰企業股份有限公司