



Main

| | |
|------------------------------------|--|
| Range of product | Harmony XVB Universal |
| Product or component type | Complete beacon |
| Beacon or indicator bank unit type | Base unit with direct or tube fixing mode Illuminated unit |
| Signalling type | Steady |
| Mounting diameter | 2.76 in (70 mm) |
| Component name | XVBL |
| Material | Glass reinforced polyamide (base unit) Polycarbonate (illuminated unit) |
| Light source | Orange bulb not included |
| Bulb type | Incandescent with BA 15d Protected LED |
| [Us] rated supply voltage | <= 250 V |
| Power dissipation in W | <= 7 W |

Complementary

| | |
|--|---|
| Connections - terminals | Screw clamp terminals, connection capacity: <= 1 x 1.5 mm ² with cable end |
| [Ui] rated insulation voltage | 250 V conforming to IEC 60947-1 |
| Nominal voltage limit | 0.85...1.1 Un conforming to IEC 60947-5-1 |
| [Uimp] rated impulse withstand voltage | 4 kV conforming to IEC 60947-1 |
| CAD overall width | 2.76 in (70 mm) |
| CAD overall height | 5.47 in (139 mm) |
| CAD overall depth | 2.76 in (70 mm) |
| Terminals description ISO n°1 | (COM-1)PW (GND)GROUND |
| Product weight | 0.57 lb(US) (0.26 kg) |

Environment

| | |
|---------------------------------------|--|
| pollution degree | 2 |
| product certifications | CCC CSA C22-2 No 14 GOST UL 508 |
| standards | EN/IEC 60947-5-1 |
| protective treatment | TC |
| ambient air temperature for operation | -13...122 °F (-25...50 °C) LED -13...158 °F (-25...70 °C) incandescent |
| ambient air temperature for storage | -40...158 °F (-40...70 °C) |
| electrical shock protection class | Class I (on support tube) conforming to IEC 61140 Class II (on base unit) conforming to IEC 61140 |
| IP degree of protection | IP65 (on fixing base XVBZ0.) conforming to IEC 60529 IP66 (on base unit) conforming to IEC 60529 |
| NEMA degree of protection | NEMA 4X (indoor) conforming to UL 508 |

Offer Sustainability


| | |
|--|--|
| WARNING: This product can expose you to chemicals including: | WARNING: This product can expose you to chemicals including: |
| Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. | Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. |
| For more information go to www.p65warnings.ca.gov | For more information go to www.p65warnings.ca.gov |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Illuminated Beacon for BA 15d Bulb or LED

Dimensions

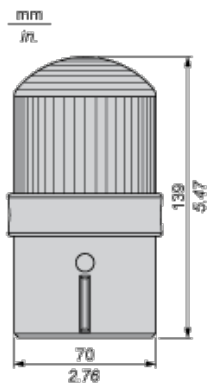

Illuminated Beacon

Wiring Diagram

