
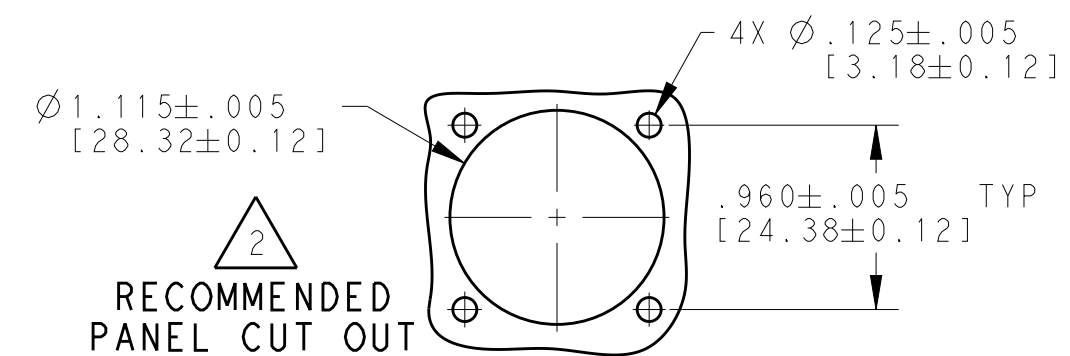


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			F	REVISED PER E.O. P18547	13APR2004	-	RDR
			G	REVISED PER E.O. P20555	21JUL2010	-	RDR
			H	REVISED PER E.O. P21366	4JUL2012	-	RDR
			H1	REVISED PER ECO-14-002953	29JAN2014	PV	DM

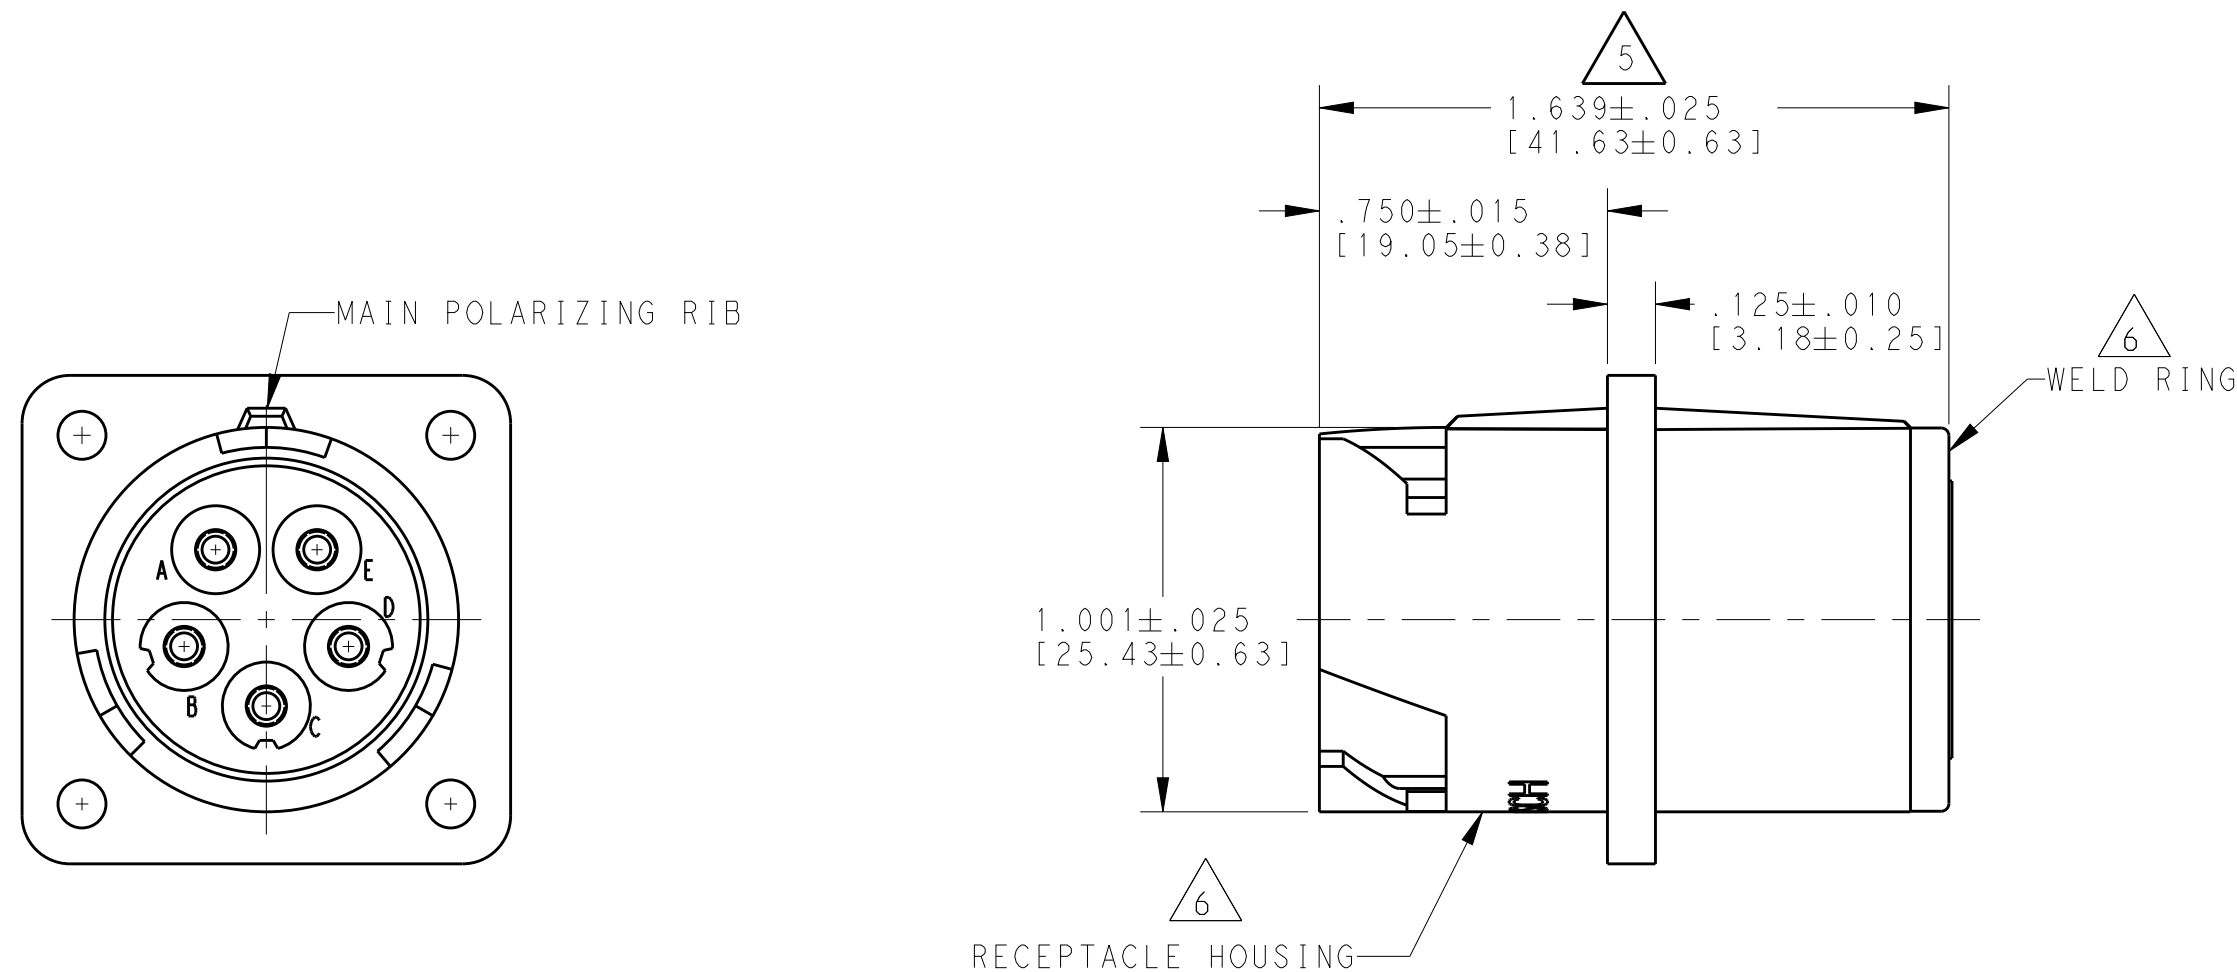

1. SEE TABLE FOR USABLE WIRE RANGE AND INSULATION RANGE.

CONTACT SIZE	MINIMUM O.D.	MAXIMUM O.D.	WIRE RANGE [mm ²]  3
16	.100 [2.54]	.150 [3.81]	14-20 AWG [2.0-.50]

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. HAYNES 05OCT1999		 TE Connectivity	
		CHK I. GRANTCHAROVA 16SEP2013			
DIMENSIONS: [INCHES[mm]]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		APVD D. MEYER 18SEP2013		RECEPTACLE CONNECTOR SQUARE FLANGE HD10 SERIES ARR. 5-16 COLOUR: GREY	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 0.25 4 PLC ± ANGLES ±0°30'0 FINISH		PRODUCT SPEC - APPLICATION SPEC - WEIGHT 31.95 (g)		SIZE	CAGE CODE
MATERIAL 		DRAWING NO A200779		RESTRICTED TO -	
		C=HD10-5-16P		SCALE 2:1 SHEET 1 OF 1 REV H1	
		Customer Drawing			