



REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	PRODUCTION ISSUE	24JUN2016	KH	AP

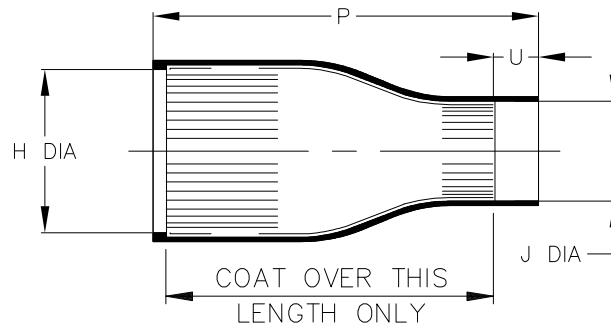

AS SUPPLIED



SCRAP SECTION A-A

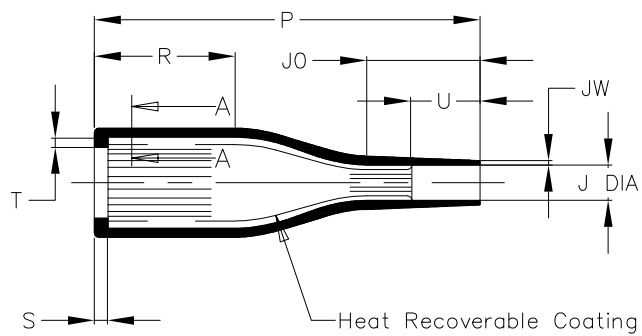

AFTER UNRESTRICTED RECOVERY


Part No.	H		J		P		R	S	T	U		J0	HW	JW
	Min a	Max b	Min a	Max b	±5% a	±10% b	±10% b	Ref b	Ref b	Min a	±20% b	Ref b	±30% b	±30% b
202S121-100C-0	14 [.55]	10.4 [.41]	10 [.39]	5.0 [.20]	45 [1.77]	45 [1.77]	17 [.67]	3.0 [.12]	1.0 [.04]	6.0 [.24]	10 [.39]	15 [.59]	2.0 [.08]	1.0 [.04]
202S132-100C-0	20 [.79]	14.2 [.56]	12 [.47]	6.0 [.24]	60 [2.36]	60 [2.36]	28 [1.10]	3.0 [.12]	1.0 [.04]	6.0 [.24]	10 [.39]	17 [.67]	2.0 [.08]	1.0 [.04]
202S142-100C-0	26 [1.02]	18.0 [.71]	14 [.55]	7.2 [.28]	72 [2.83]	72 [2.83]	32 [1.26]	3.0 [.12]	1.0 [.04]	6.0 [.24]	10 [.39]	20 [.79]	2.0 [.08]	1.0 [.04]
202S152-100C-0	32 [1.26]	22.4 [.88]	20 [.79]	8.5 [.33]	85 [3.35]	85 [3.35]	31 [1.22]	3.0 [.12]	1.0 [.04]	9.0 [.35]	15 [.59]	25 [.98]	2.0 [.08]	1.0 [.04]
202S163-100C-0	38 [1.50]	28.2 [1.11]	24 [.94]	10.0 [.39]	110 [4.33]	110 [4.33]	50 [1.97]	3.0 [.12]	1.7 [.07]	12.0 [.47]	20 [.79]	30 [1.18]	2.2 [.09]	1.2 [.05]
202S174-100C-0	41 [1.61]	35.1 [1.38]	32 [1.26]	15.8 [.62]	132 [5.20]	135 [5.31]	70 [2.76]	3.0 [.12]	1.7 [.07]	12.0 [.47]	20 [.79]	30 [1.18]	3.0 [.12]	1.5 [.06]

DIMENSIONS:

mm [INCHES]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
 1 PLC ± -
 2 PLC ± -
 3 PLC ± -
 4 PLC ± -
 ANGLES ± -



DWN

K. HOLAL

24JUN2016

CHK

N. NAGAR

24JUN2016

APVD

A. POOLE

24JUN2016

PRODUCT SPEC

—

APPLICATION SPEC

—

WEIGHT

00

MATERIAL

—

FINISH

—



TE Connectivity

NAME

STRAIGHT BOOT, COATED

202S1XX-100C-0

SIZE

A4

CAGE CODE

00779

DRAWING NO

C-202S1XX-100C-0

RESTRICTED TO

—

CUSTOMER DRAWING

SCALE

DNS

SHEET

1 OF 2

REV 1

THIS DRAWING IS UNPUBLISHED.

ALL RIGHTS RESERVED.

COPYRIGHT 2017 BY TE CONNECTIVITY

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

COMPATIBILITY CHART

Material Dash No.	Material Description	SPEC No.	Coating Slash No.
-100C	POLYOLEFIN/SILVER COMPOSITE (ZEROHAL™)	RW-3046	/86, /200

ORDERING INFORMATION

202S1**-100C/**-0

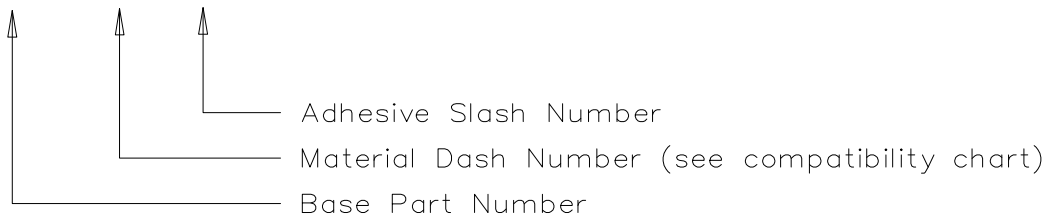

NOTES


- As supplied dimensions are for parts without adhesive, when an adhesive layer is added entry diameters will reduce by 1.5mm Max.
- For method of measuring recovered diameter, see appropriate RW specification (SPEC No.) section 2.2.
- ZEROHAL is a trademark of TE Connectivity.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

COPYRIGHT 2017 By TE CONNECTIVITY

DIMENSIONS: mm [INCHES]	DWN	K. HOLAL	08JUN2016	MATERIAL	—	FINISH	—	
	CHK	N. NAGAR	08JUN2016	 TE Connectivity				
	APVD	A. POOLE	08JUN2016					
	TOLERANCES UNLESS OTHERWISE SPECIFIED:			PRODUCT SPEC —				
	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —			APPLICATION SPEC —			NAME STRAIGHT BOOT, COATED 202S1XX-100C-0	
			WEIGHT 00			SIZE A4 CAGE CODE 00779 DRAWING NO C-202S1XX-100C-0 RESTRICTED TO —		
CUSTOMER DRAWING				SCALE DNS		SHEET 2 OF 2 REV 1		