

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0756405001

Status:

Active

Overview:

SFP+ and SFP Interconnect Solutions

Description:

Small Form-factor Pluggable (SFP) Stacked 2-by-1 Multi-Port Connector with 4 Lightpipes, with Press-fit PC Tails, 40 Circuits, Lead-Free

Documents:

- 3D Model

Application Specification AS-76090-001 (PDF)
- Drawing (PDF)

Packaging Specification PK-75462-001 (PDF)
- Product Specification PS-75310-001 (PDF)

RoHS Certificate of Compliance (PDF)
- Application Specification AS-75310-001 (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

I/O Connectors

Series

75640

Application

Module-to-Board

Comments

With 4 Lightpipes

Component Type

Receptacle

Overview

SFP+ and SFP Interconnect Solutions

Product Name

SFP

Type

N/A

UPC

822350235419

Physical

Circuits (Loaded)

40

Circuits (maximum)

40

Color - Resin

Black, Clear (Blue Tint)

Durability (mating cycles max)

200

Flammability

94V-0

Lock to Mating Part

Yes

Material - Metal

High Performance Alloy (HPA)

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic, Polycarbonate

Net Weight

28.326/g

Orientation

Right Angle

PC Tail Length

3.05mm

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness - Recommended

2.40mm

Packaging Type

Tray

Panel Mount

No

Pitch - Mating Interface

0.80mm

Pitch - Termination Interface

0.80mm

Plating min - Mating

0.762µm

Plating min - Termination

0.762µm

Polarized to Mating Part

Yes

Polarized to PCB

Yes

Surface Mount Compatible (SMC)

No

Temperature Range - Operating


-40°C to +85°C

Termination Interface: Style

Through Hole - Compliant Pin

Waterproof / Dustproof

No

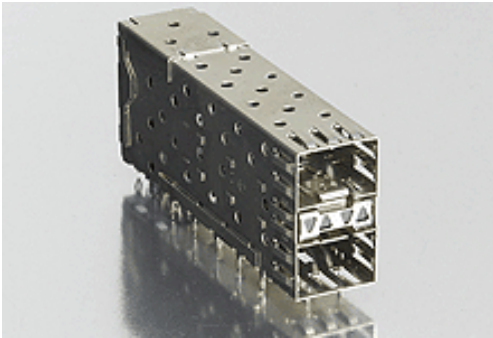

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Contains SVHC(2014 December 17): No

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

Green Image

Not Relevant

Search Parts in this Series

75640 Series

Use With

75951-0999 SFP Dust Plug

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Insertion Tool

0622030140

Extraction Tool, 2 x 1

0622029930

Medium

Electrical

Current - Maximum per Contact	0.5A
Shield Type	EMI Fingers
Shielded	Yes
Voltage - Maximum	30V

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-75310-001, AS-76090-001
Packaging Specification	PK-75462-001
Product Specification	PS-75310-001
Sales Drawing	SD-75640-001, SD-75640-004

This document was generated on 07/02/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION