
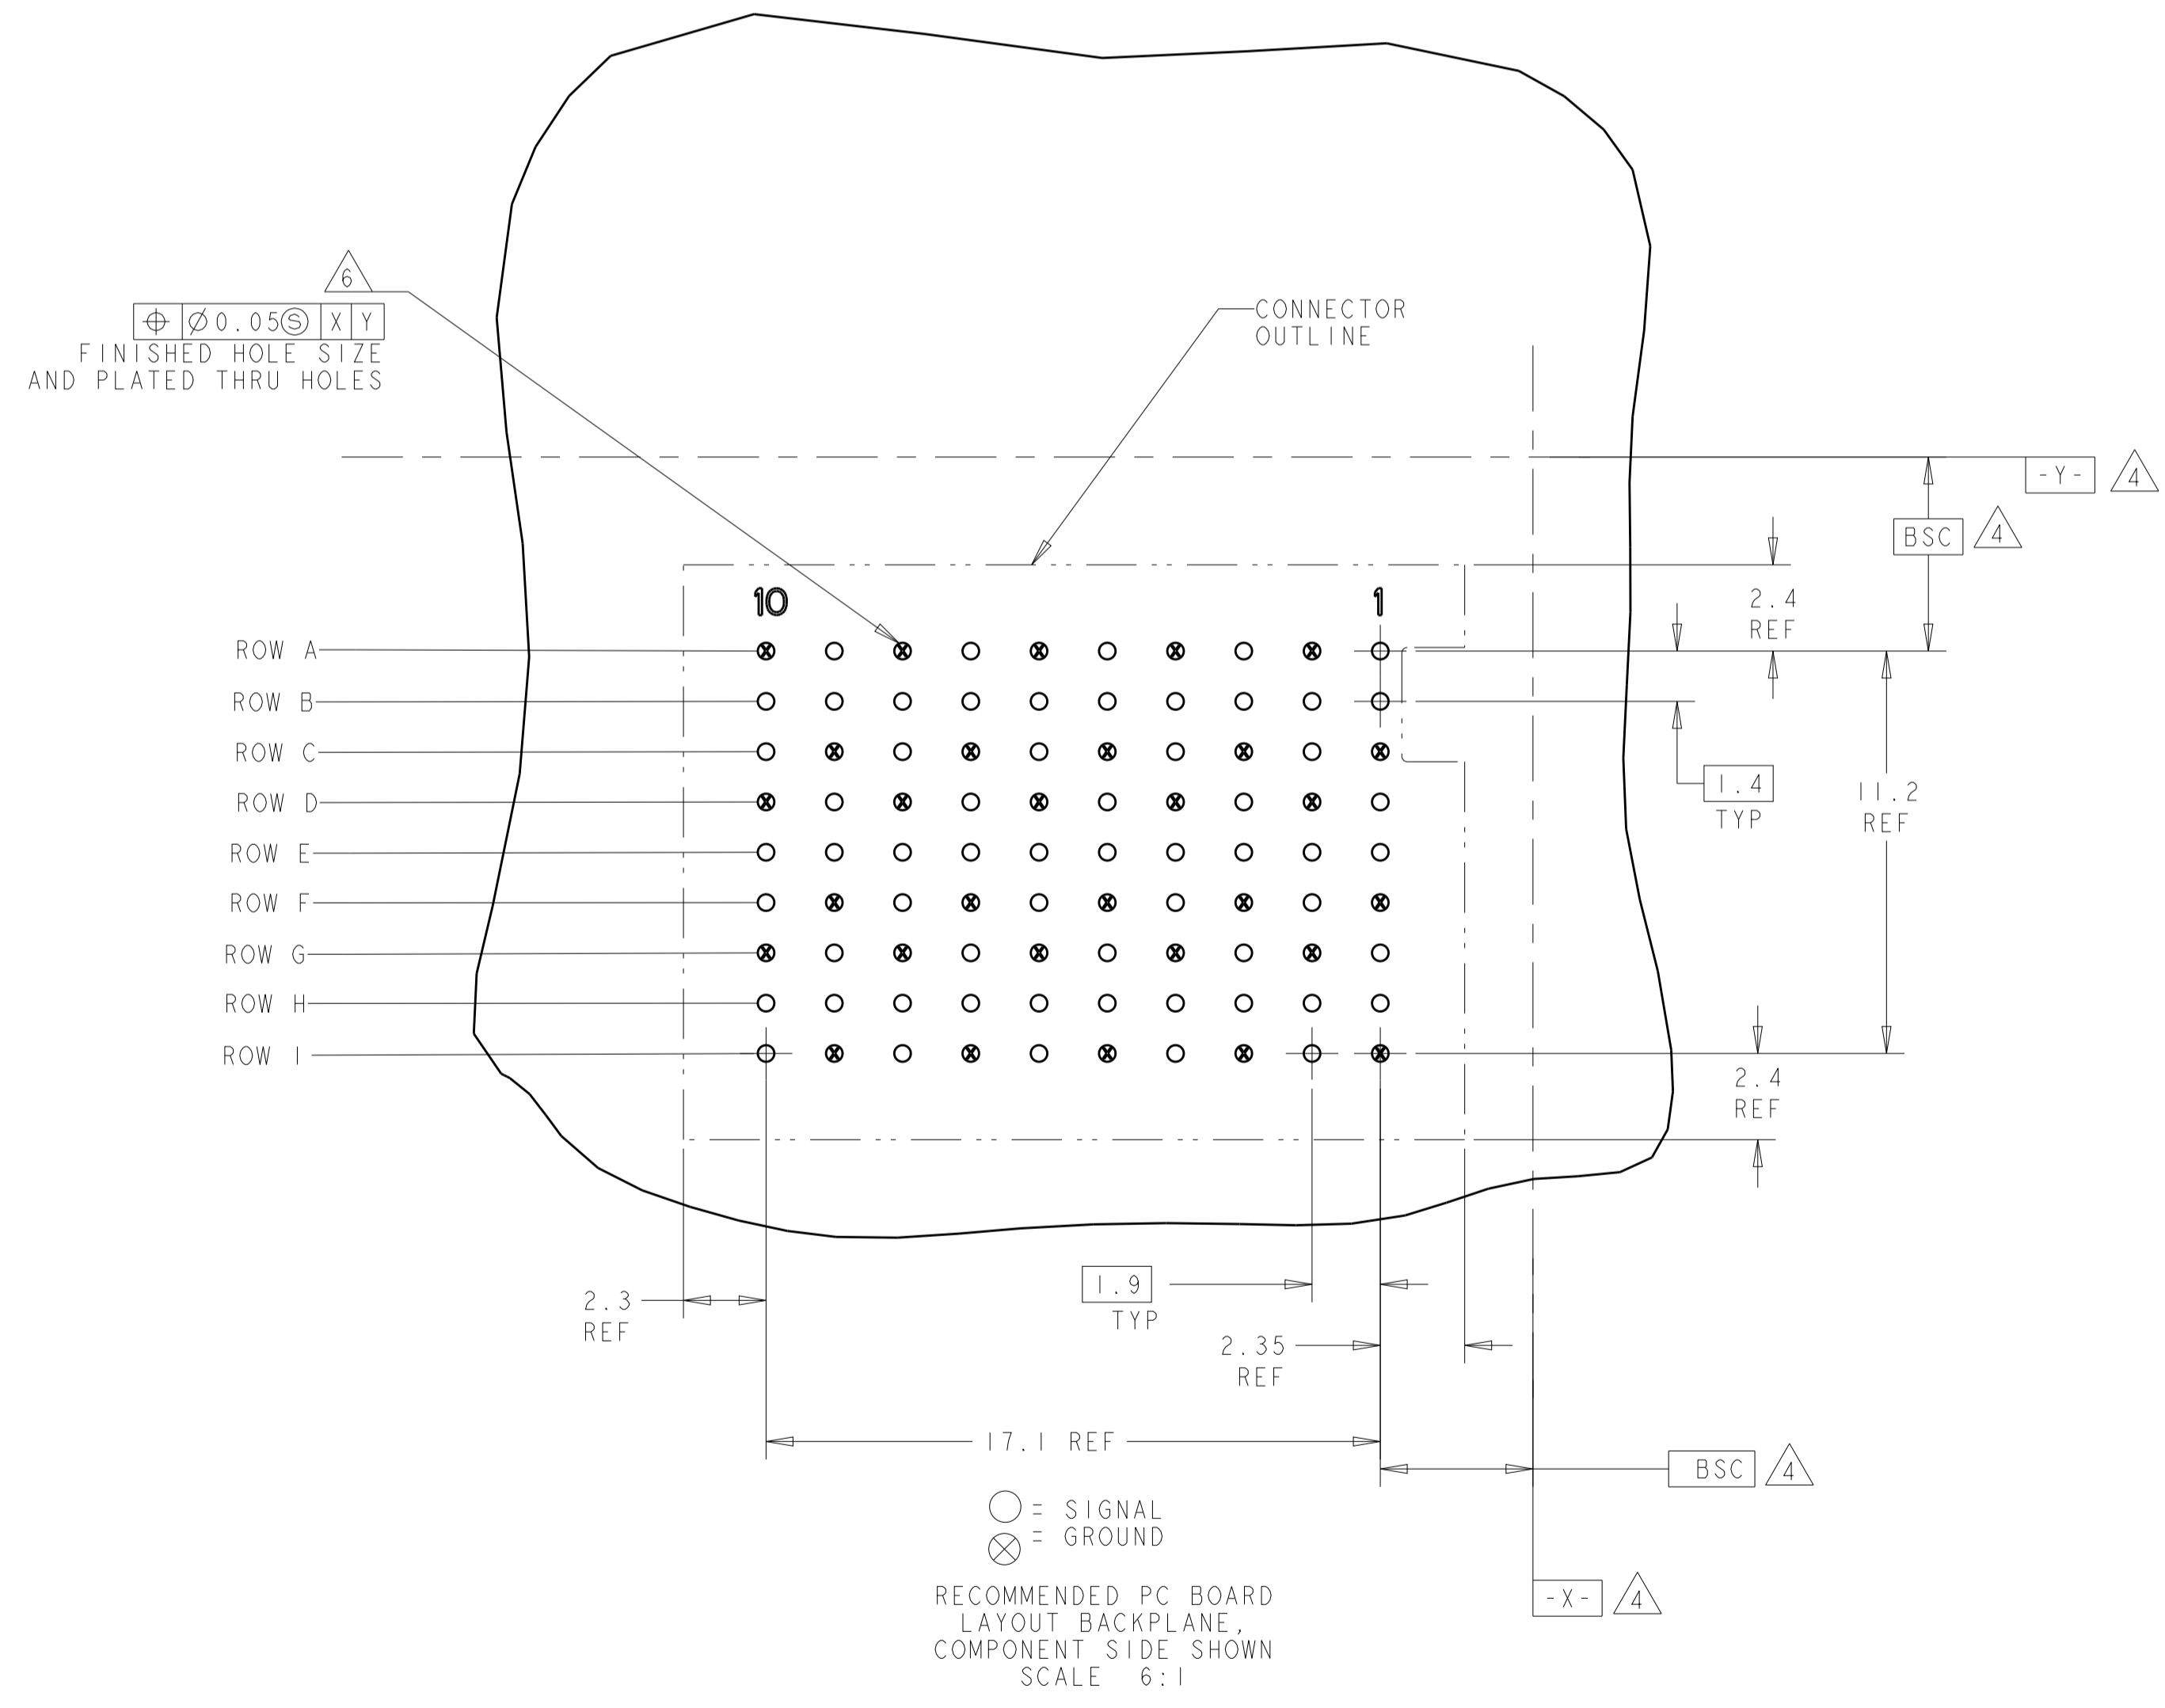
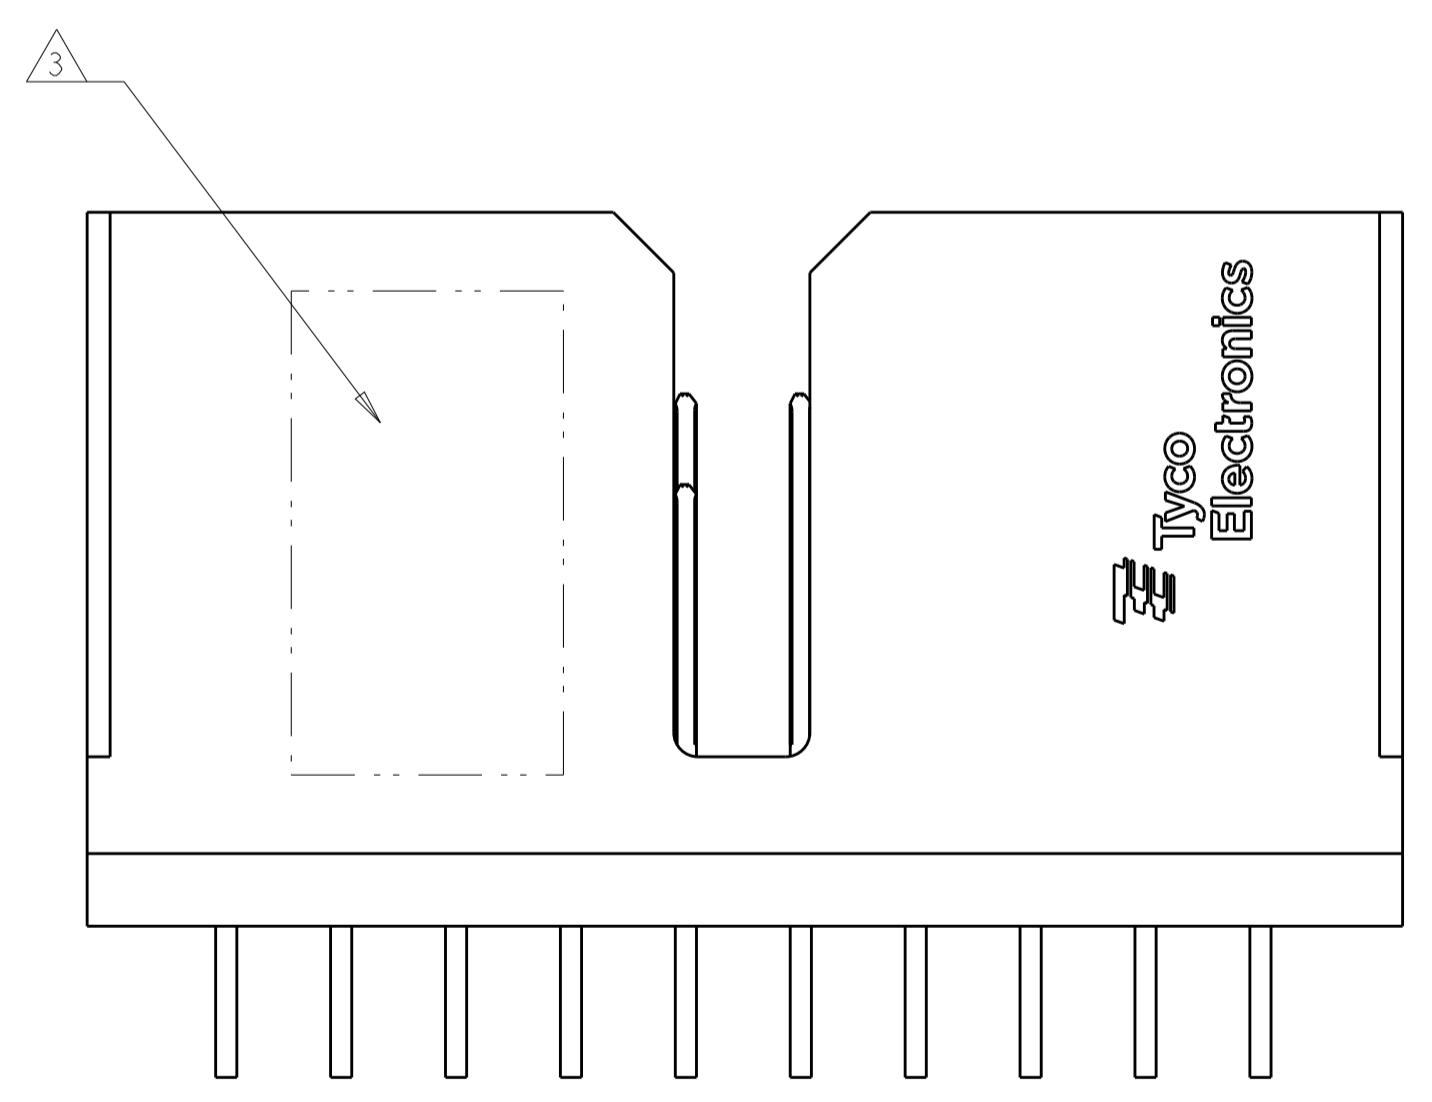
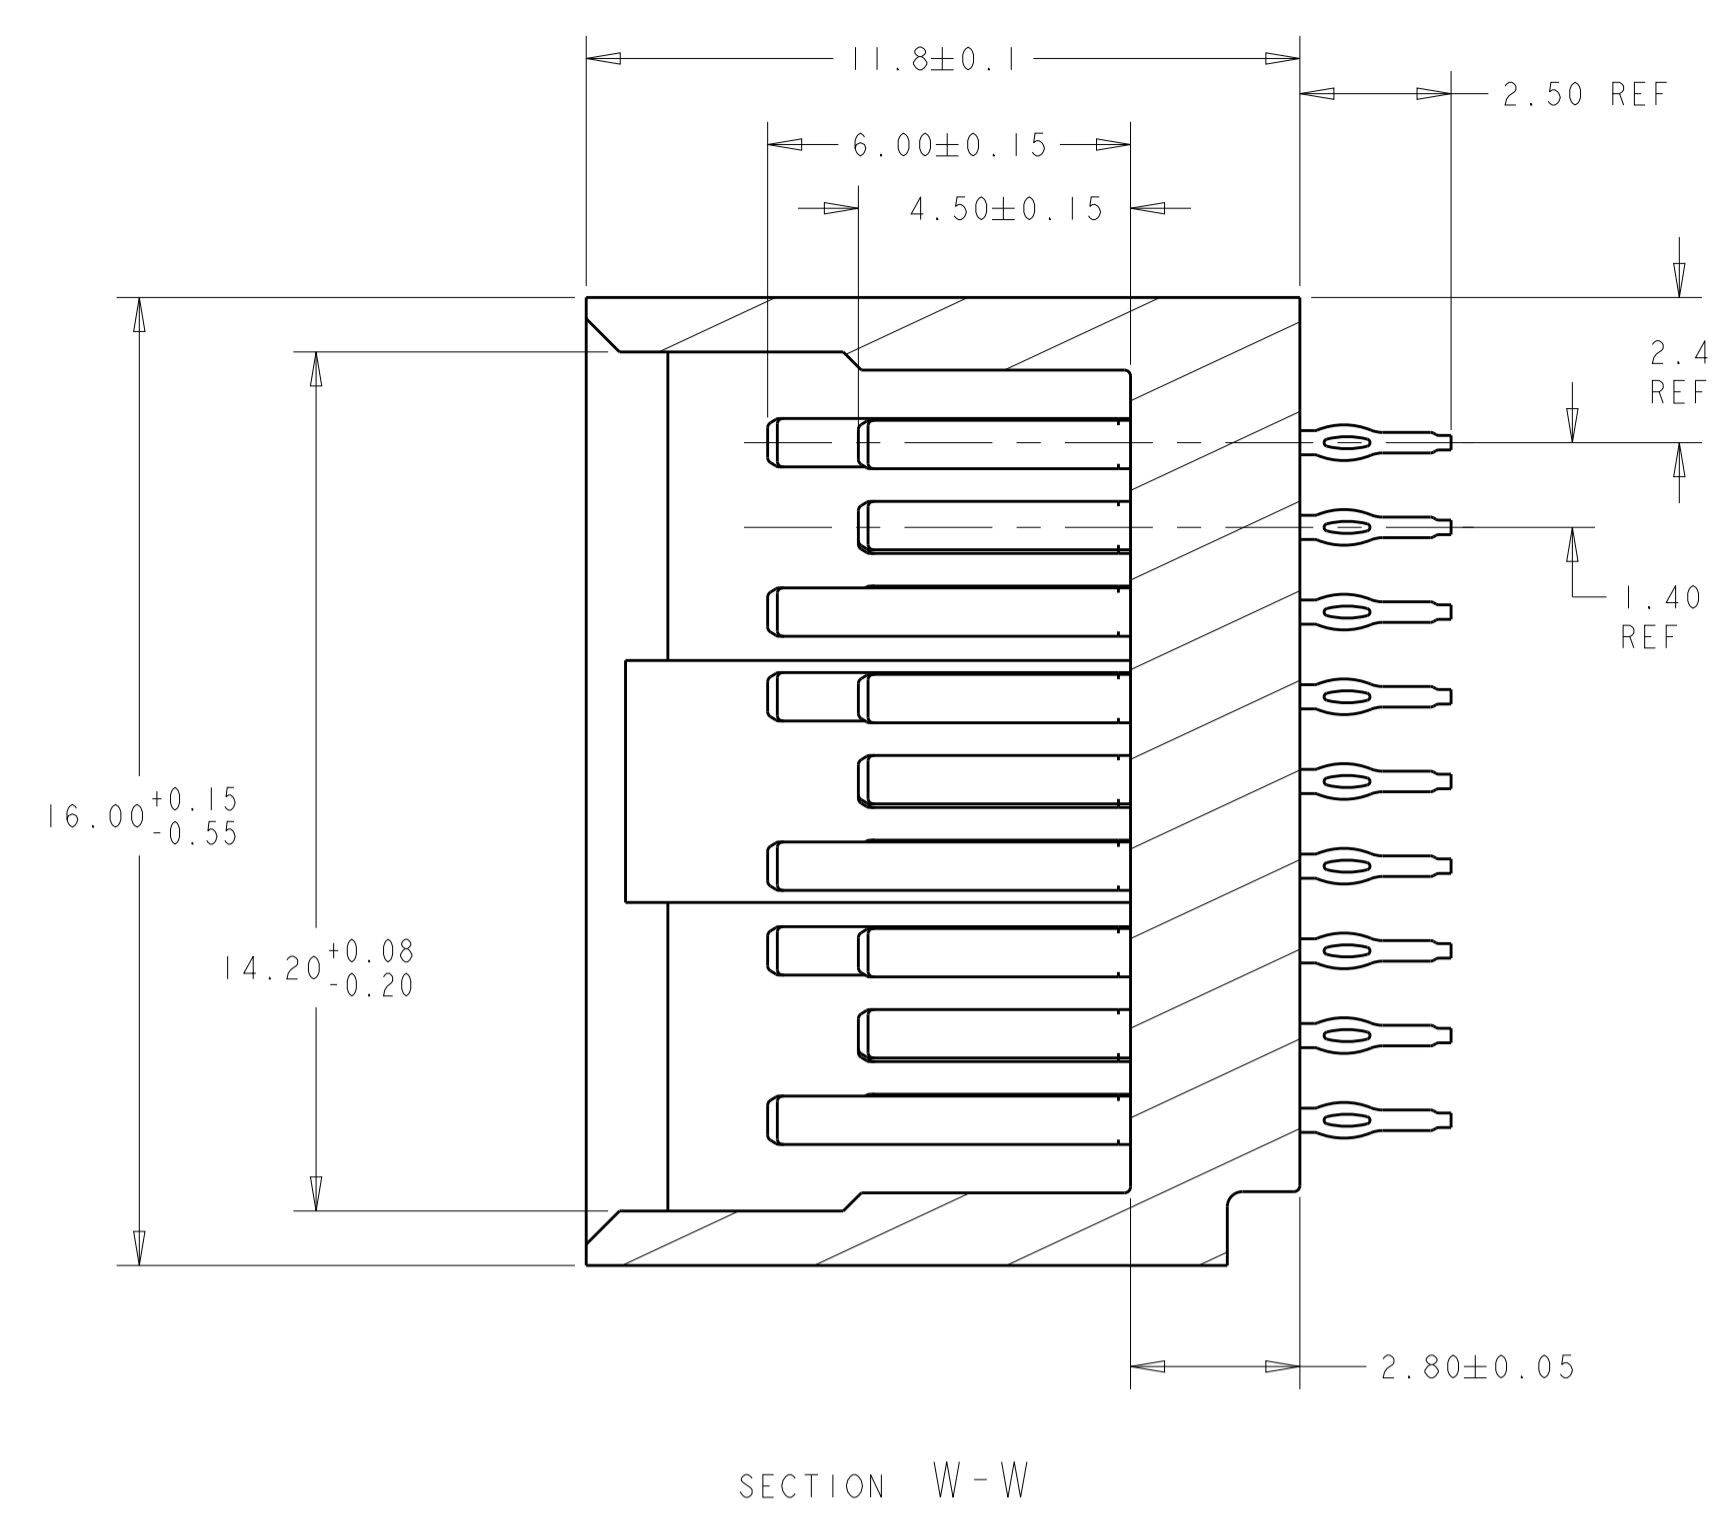
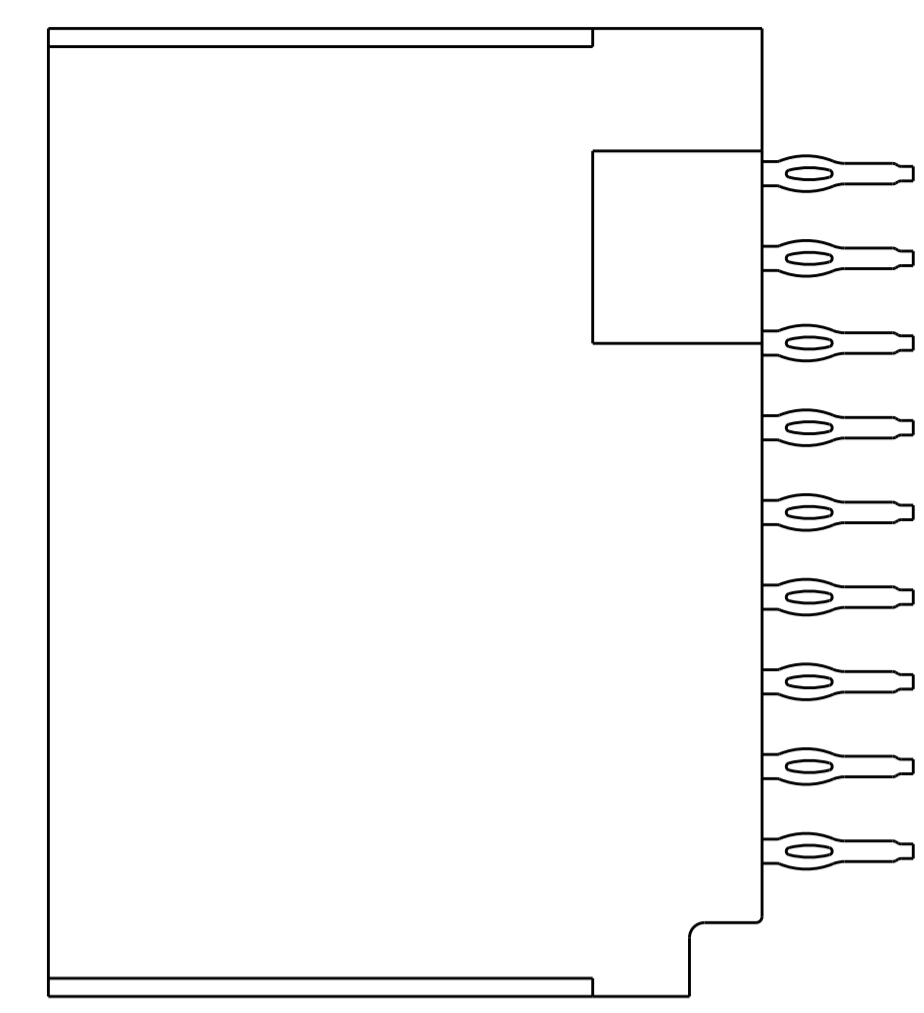


REVISIONS						
LOC	DIST	P. LTH	DESCRIPTION	DATE	DWN	APVD
		B	REVISED PER ECO-13-002771	20MAR2013	KH	RP

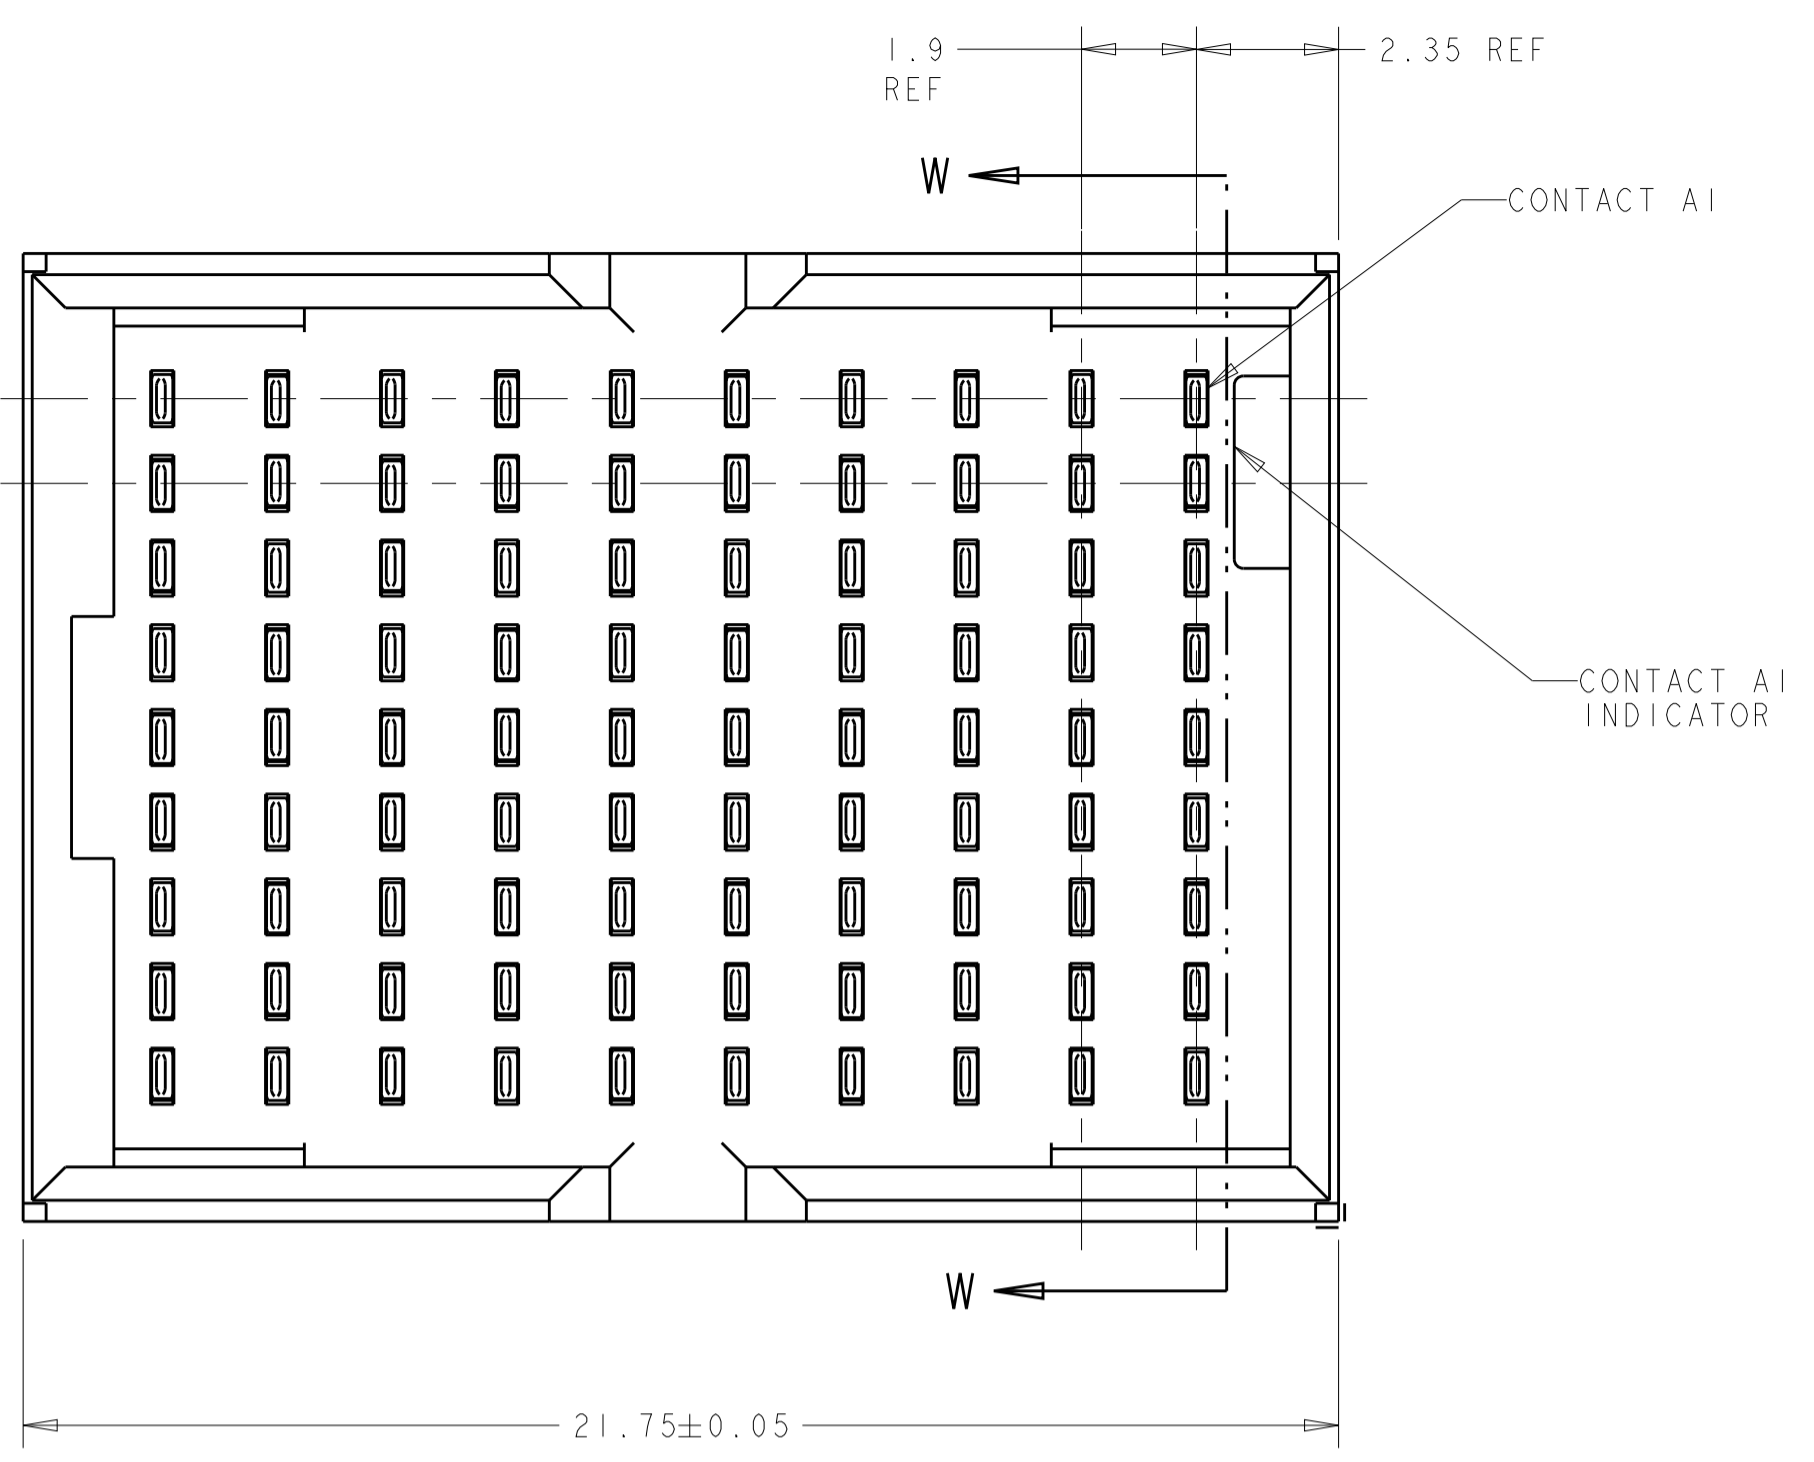

- 1 MATERIAL:  
CONTACT - PHOS BRONZE  
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- 2 FINISH: CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-2303-1; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III, APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE). COMPLIANT PIN AREA- 0.5µm MIN MATTE TIN OVER 1.27µm MIN NICKEL.
- 3 CONNECTOR MARKED WITH PART NUMBER, DATE CODE, 85 OHM, AND STANDARD IN APPROXIMATE AREA SHOWN
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 5. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 6 REFERENCE APPLICATION SPEC FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 7 REFERENCE APPLICATION SPEC FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.

1934976-1  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: J. K. SHOBER 01JUL2008	TE Connectivity
DIMENSIONS: mm		CHK: C. RITTNER 01JUL2008	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: -	NAME: HEADER ASSEMBLY, DOUBLE ENDED
0 PLC ±		PRODUCT SPEC: 108-2303-1	3 PAIR, 10 COLUMN
2 PLC ±		APPLICATION SPEC: 114-13243	TinMan 85 OHM
3 PLC ±		WEIGHT: -	SIZE: A100779
4 PLC ±		CUSTOMER DRAWING	CAGE CODE: 1934976
ANGLES ±		SCALE: 8:1	SHEET 1 OF 1
FINISH: -		REV: B	