

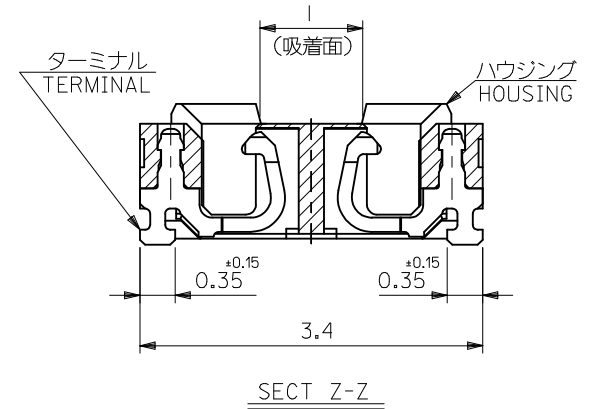

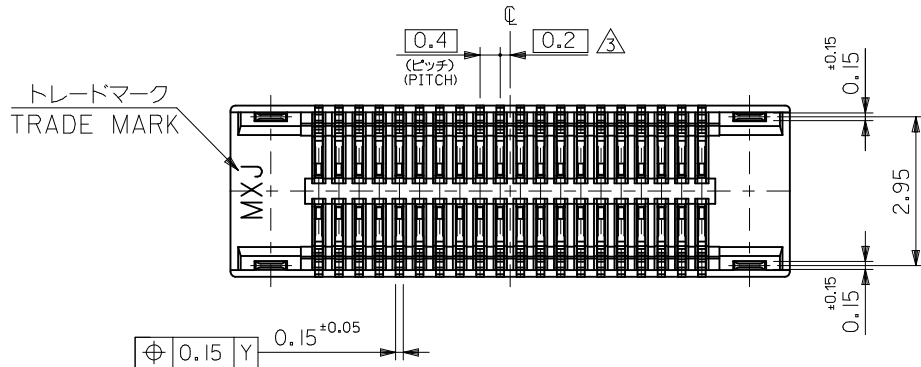


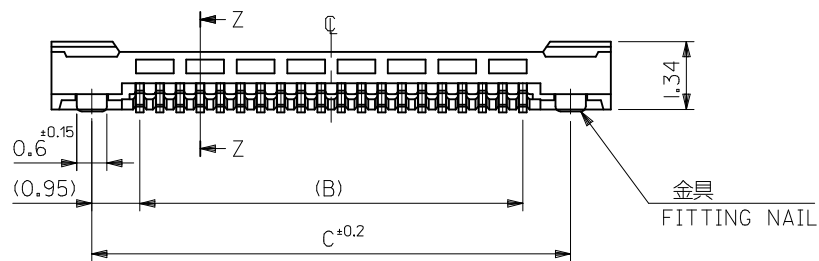


17.5	15.6	19.1	51338-0840	80
9.5	7.6	11.1	51338-0440	40
5.5	3.6	7.1	51338-0240	20
C	B	A	EMBOSSD TAPE PKG. ORDER No. オーダー番号	CKT.
CONNECTOR SERIES No.			51338-**39	

RELEASED EC NO: J2015-0916 DRAWN-Y SHIDA 2015/01/15 CHKD-TASAKAWA 2015/01/15 APPR-KMORIKAWA 2015/02/18	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		0.25 UNDER UNDER ±0.03	DRAWN BY DATE	TITLE 0.4 B-TO-B REC ASSY HGT=1.5 J-BEND TAIL -LEAD FREE- molex						
		0.25 OVER 0.5 UNDER ±0.05	YISHIDA 2015/01/15							
		0.5 OVER 1.0 UNDER ±0.1	CHECKED BY DATE							
		1.0 OVER 10 UNDER ±0.2	TASAKAWA 2015/01/15							
		10 OVER 30 UNDER ±0.25	APPROVED BY DATE							
		30 OVER ±0.3	KMORIKAWA 2015/02/18							
		ANGULAR ±3 °			MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
				SEE CHART		SD-51338-007		1 OF 2		
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

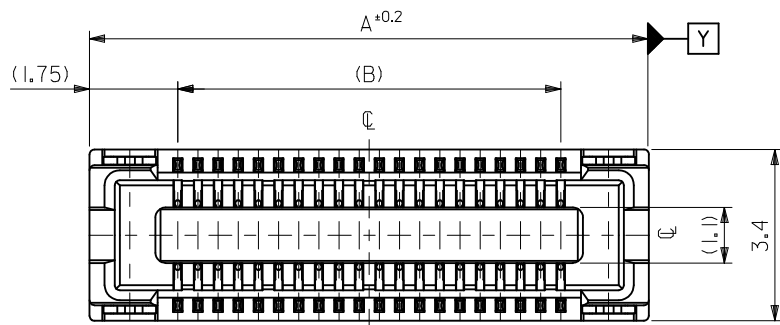


NOTES

- 製品詳細寸法については製品単体図面を参照下さい。
RE DETAILED DIMENSION, SEE PRODUCT DRAWING.
- 梱包数量：2500個/リール
NUMBER OF CONNECTORS：2500PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

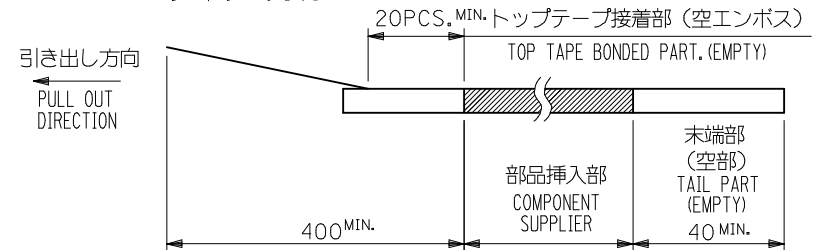




- トップテープの剥離強度については、IEC60286-3に準拠。
TOP TAPE PEEL FORCE IS DEFINED BY IEC60286-3.
- 材料
キャリアテープ (CARRIER TAPE)：ポリプロピレン (POLYPROPYLENE)
トップテープ (TOPTAPE)：PET, PE, PEF
リール (REEL)：ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
- ELV 及び RoHS 適合品。
ELV AND RoHS COMPLIANT.

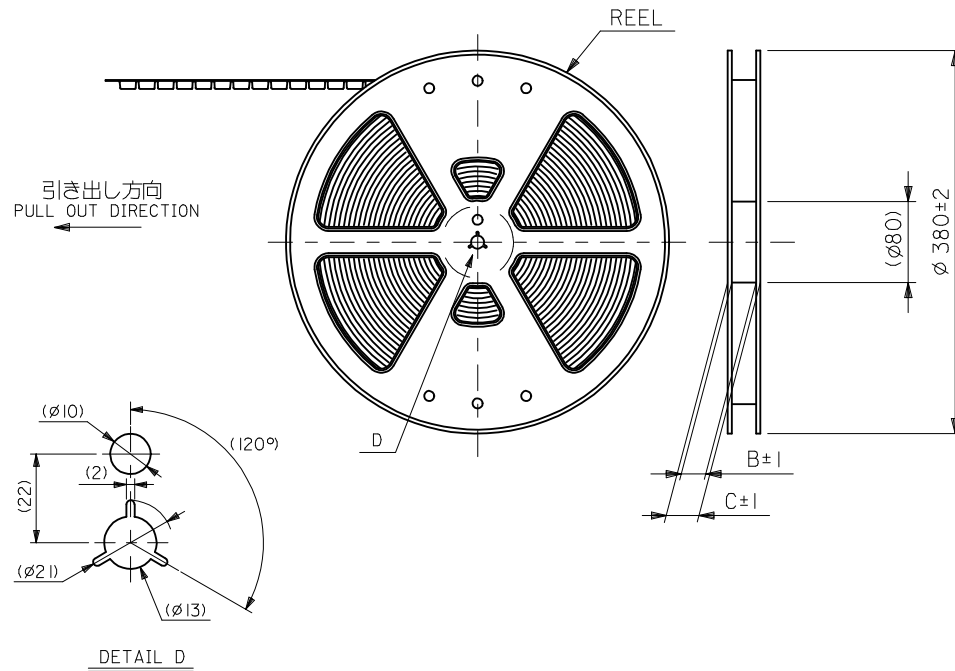

RELEASED EC NO: J2015-0916 DRAWN: YSHIDA CHKD: TASAKAWA APPR: KMORIKAWA	2015/01/15 2015/01/15 2015/02/18	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
			0.25 UNDER UNDER ±0.03	DRAWN BY DATE	TITLE 0.4 B-T0-B CONN. REC ASSY(HGT=1.5) EMBSTP PKG						
			0.25 OVER 0.5 UNDER ±0.05	YISHIDA 2015/01/15							
			0.5 OVER 1.0 UNDER ±0.1	CHECKED BY DATE	molex						
			1.0 OVER 10 UNDER ±0.2	TASAKAWA 2015/01/15							
			10 OVER 30 UNDER ±0.25	APPROVED BY DATE	SD-51338-008						
			30 OVER ±0.3	KMORIKAWA 2015/02/18							
			ANGULAR ±3 °			MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		1 OF 3			
			0	REV				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

10 9 8 7 6 5 4 3 2 1

引き出し方向
PULL OUT
DIRECTION

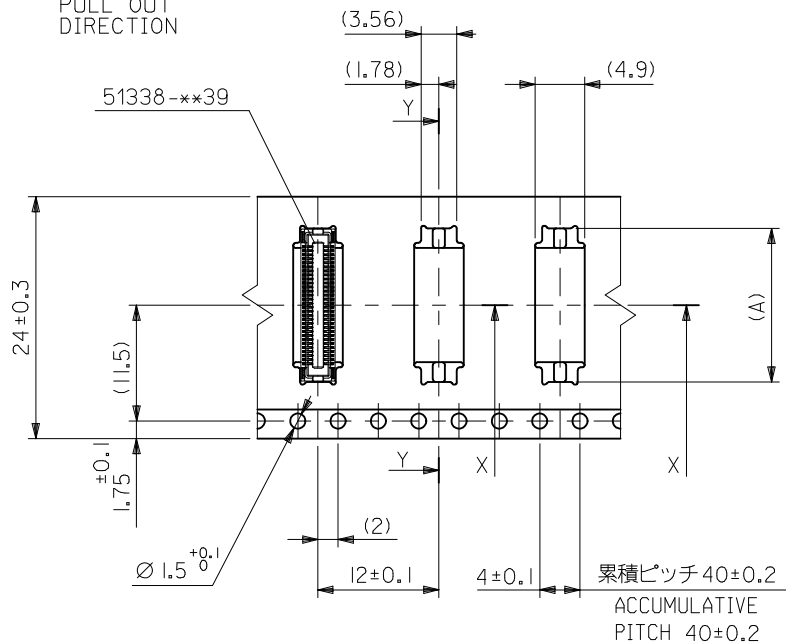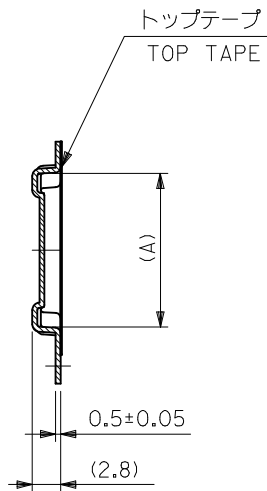

24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

24	29.4	25.4	11.26 7.26	51338-0440 51338-0240	40 20
キャリアテープ幅 CARRIER TAPE WIDTH		C	B	(A)	EMBOSSED PACKAGE ORDER NO. オーダー番号
CONNECTOR SERIES No.					51338-**39
					CKT.

SEE SHEET 1 OF 3 EC NO: J2015-0916 DRWNY:ISHIDA 2015/01/15 CHKD:TASAKAWA 2015/01/15 APPR:KMORIKAWA 2015/02/18	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		0.25	UNDER	UNDER	± 0.03	DRAWN BY	DATE	TITLE 0.4 B-T0-B CONN. REC ASSY(HGT=1.5) EMBSTP PKG		
		0.25	OVER	0.5	UNDER	± 0.05	YISHIDA 2015/01/15			
		0.5	OVER	1.0	UNDER	± 0.1	CHECKED BY			DATE
		1.0	OVER	10	UNDER	± 0.2	TASAKAWA 2015/01/15			
		10	OVER	30	UNDER	± 0.25	APPROVED BY	DATE		
		30	OVER		± 0.3	KMORIKAWA 2015/02/18	DOCUMENT NO. SD-51338-008	SHEET NO. 2 OF 3		
		ANGULAR			±3 °	MATERIAL NO.				
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SIZE A3	SEE CHART			
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

9 8 7 6 5 4 3 2 1

10

9

8

7

6

5

4

3

2

1

F

E

D

C

B

A

F

E

D

C

B

A

引き出し方向
PULL OUT
DIRECTION

トッパートープ
TOP TAPE

51338-**-39

(3.56)

(1.78)

(4.9)

1.5^{+0.1}₀

Y

0.2^{+0.05}_{-0.05}

32

28.4^{+0.1}

(14.2)

(A)

(A)

0.5^{+0.05}

(2.8)

SECT:Y-Y

±0.1


1.75

Y

X

X

(2)

12^{+0.1}4^{+0.1}累積ピッチ 40^{+0.2}ACCUMULATIVE
PITCH 40^{+0.2}

SECT:X-X

32mm幅キャリアテープ

32mm WIDTH CARRIER TAPE

32	37.4	33.4	19.26	51338-0840	80
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	MATERIAL NO.	極数 CKT.

SEE SHEET 1 OF 3 EC NO: J2015-0916 DRWN: YISHIDA 2015/01/15 CHKD: TASAKAWA 2015/01/15 APPR: KMORIKAWA 2015/02/18	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		0.25 UNDER	UNDER	±0.03	DRAWN BY	DATE	TITLE 0.4 B-TO-B REC ASSY EMBSTP PKG				
		0.25 OVER	0.5 UNDER	±0.05	YISHIDA	2015/01/15					
		0.5 OVER	1.0 UNDER	±0.1	CHECKED BY	DATE					
		1.0 OVER	10 UNDER	±0.2	TASAKAWA	2015/01/15					
		10 OVER	30 UNDER	±0.25	APPROVED BY	DATE	molex				
		30 OVER		±0.3	KMORIKAWA	2015/02/18					
		ANGULAR ±3 °			MATERIAL NO.						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		SD-51338-008				3 OF 3	
	REV				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

9

8

7

6

5

4

3

2

1