


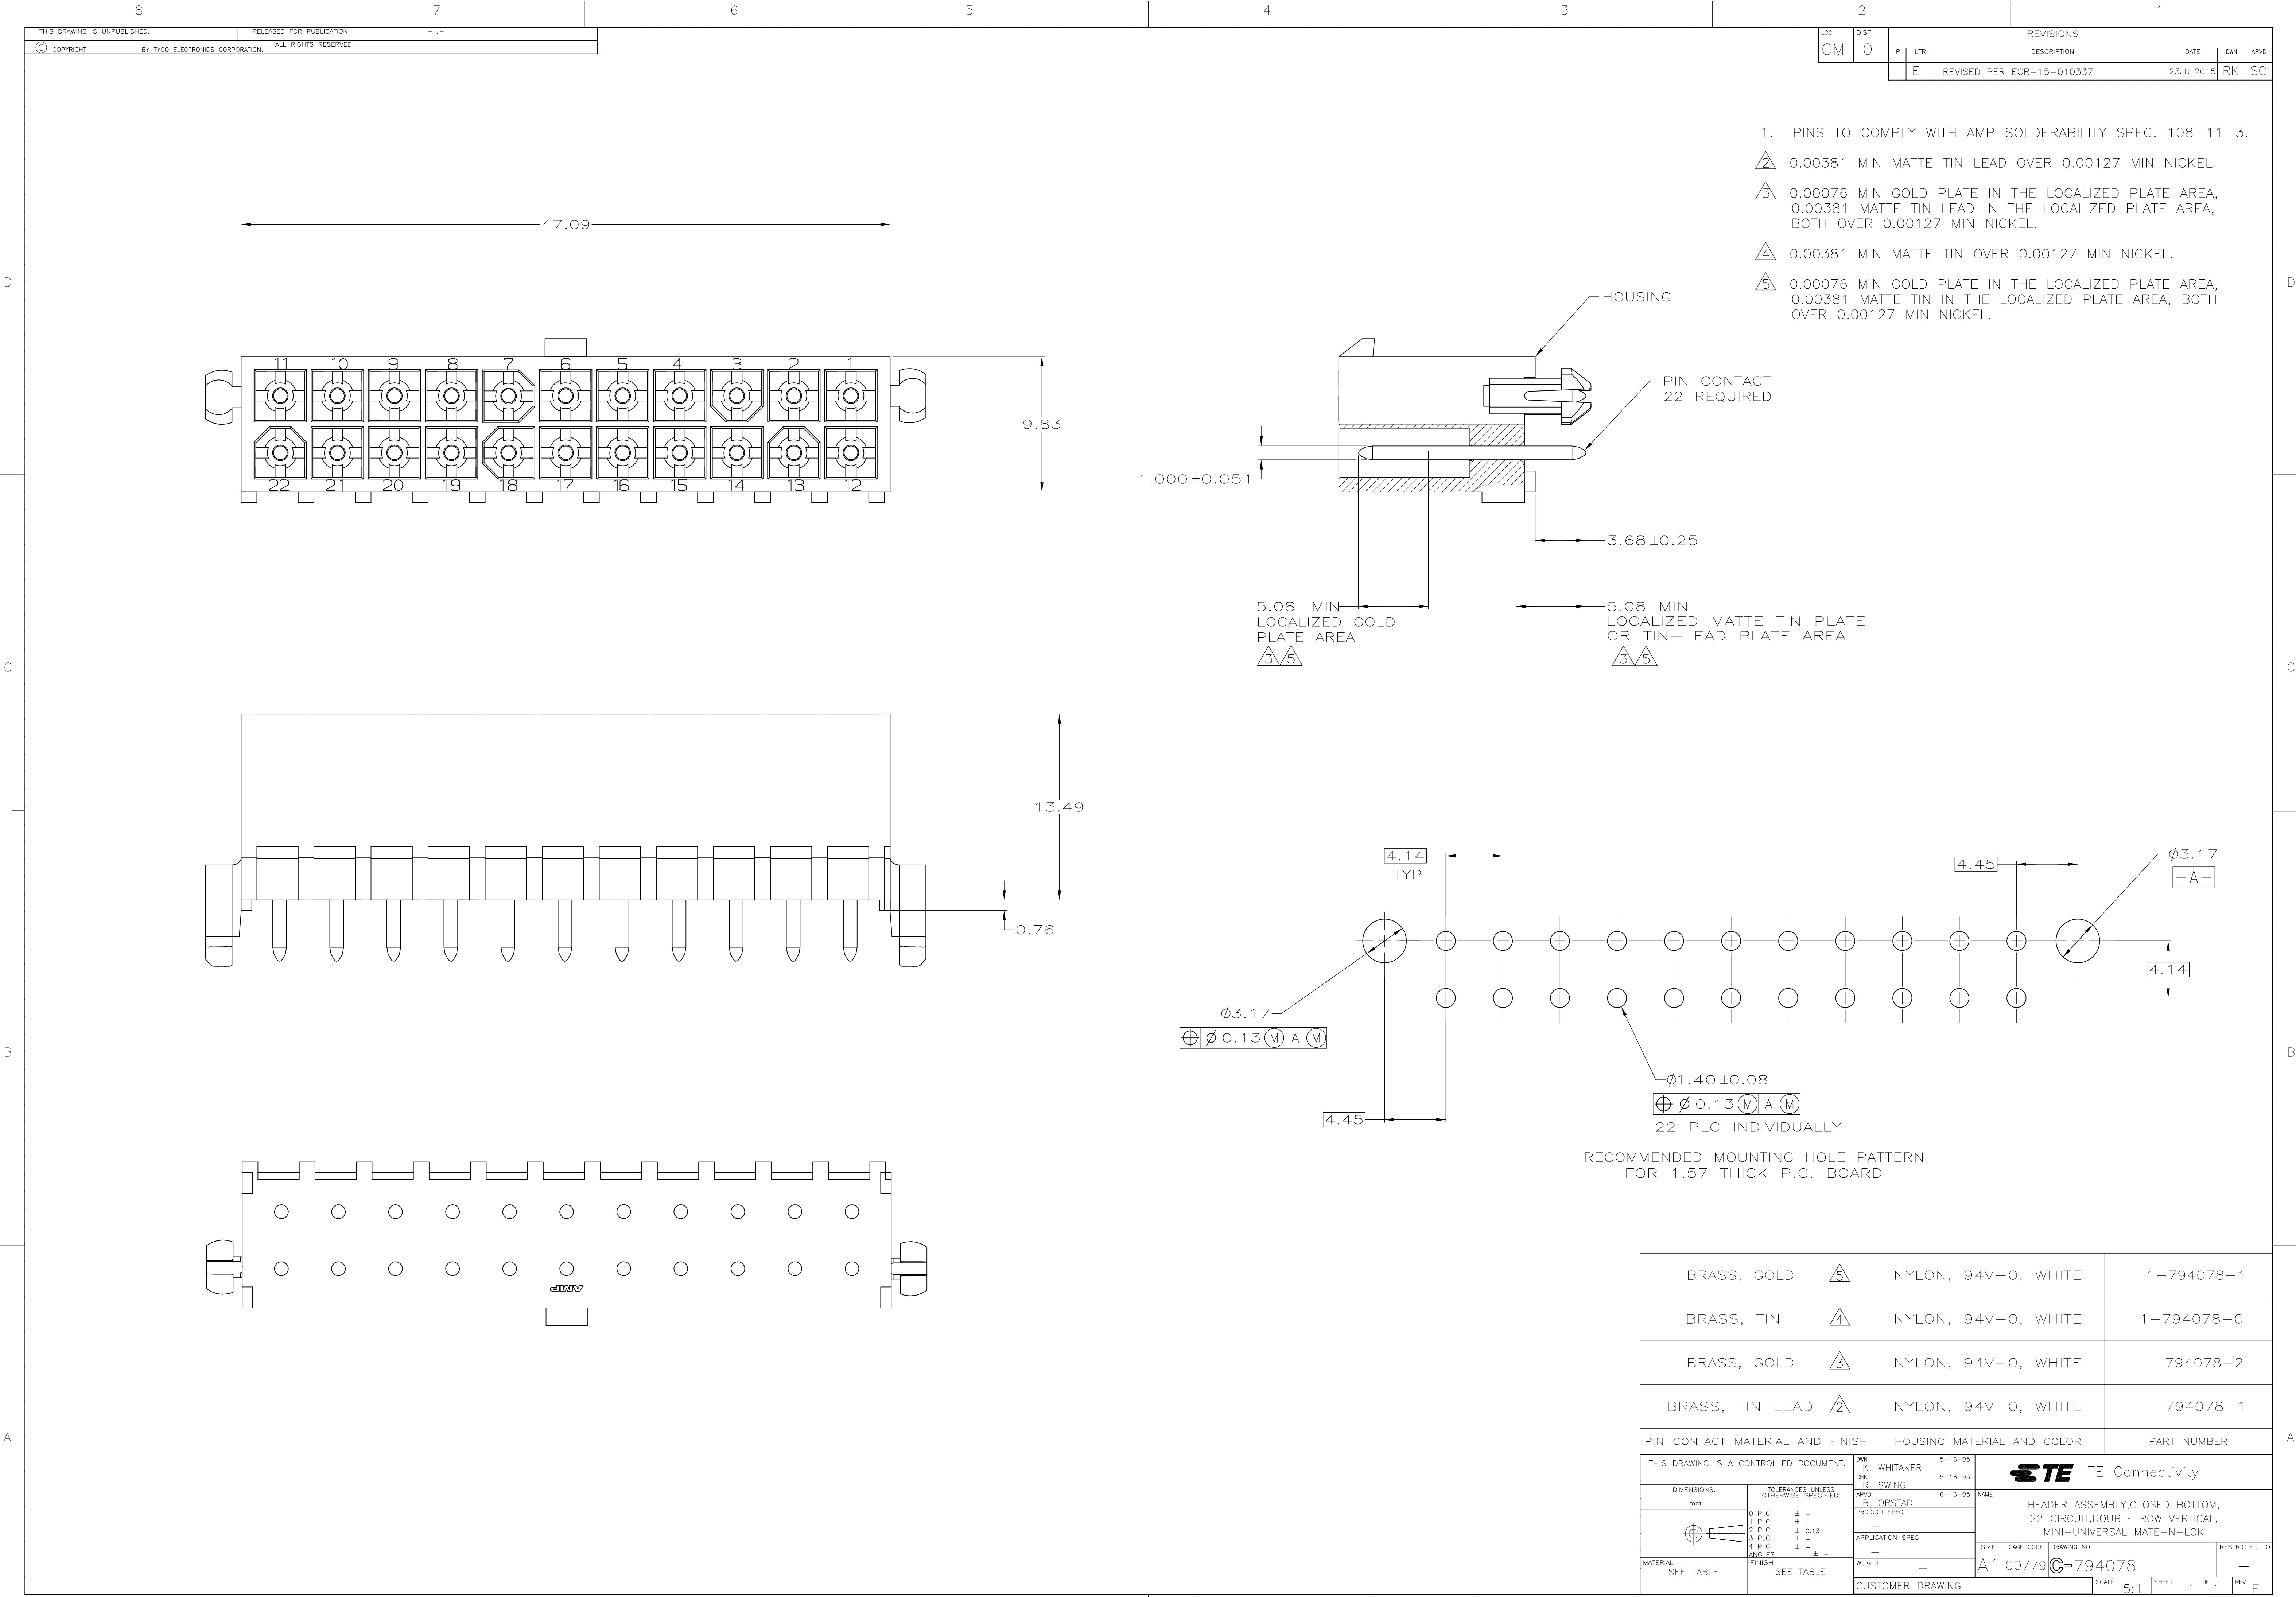

1. PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 108-11-3.
- 2 0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.
- 3 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- 4 0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL.
- 5 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

BRASS, GOLD	5	NYLON, 94V-0, WHITE	1-794078-1
BRASS, TIN	4	NYLON, 94V-0, WHITE	1-794078-0
BRASS, GOLD	3	NYLON, 94V-0, WHITE	794078-2
BRASS, TIN LEAD	2	NYLON, 94V-0, WHITE	794078-1
PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL AND COLOR	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 5-16-95 CHK R. SWING 5-16-95 APVD R. ORSTAD 6-13-95	NAME
DIMENSIONS:		PRODUCT SPEC	SIZE
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	CAGE CODE
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± -		WEIGHT	DRAWING NO
MATERIAL SEE TABLE		FINISH SEE TABLE	RESTRICTED TO
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1 REV E