


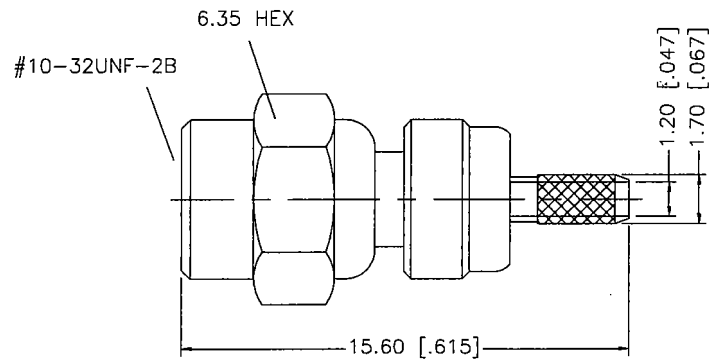


REV.	DATE	DESCRIPTION
NC	06/28/06	INITIAL RELEASE

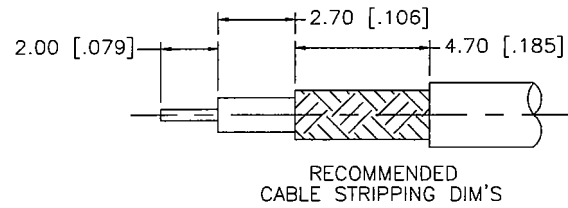

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex			
8					DRAWN	G.R.S.	06/28/06					
7						CHECKED			PART DESCRIPTION SMC CRIMP PLUG (FOR RG-178B/U, 196A/U CABLE)			
6						ISSUED						
5	HEAT SHRINK TUBE				1	SHEET	1 OF 1					
4	FERRULE	COPPER	GOLD	1								
3	CONTACT PIN	BER. COPPER	GOLD	1				DWG. NO. 152144.DWG				
2	INSULATOR	TEFLON	NATURAL	1								REV. NC SIZE A SCALE NA
1	BODY	BRASS	GOLD	1								
	DESCRIPTION	MATERIAL	FINISH	QTY								