

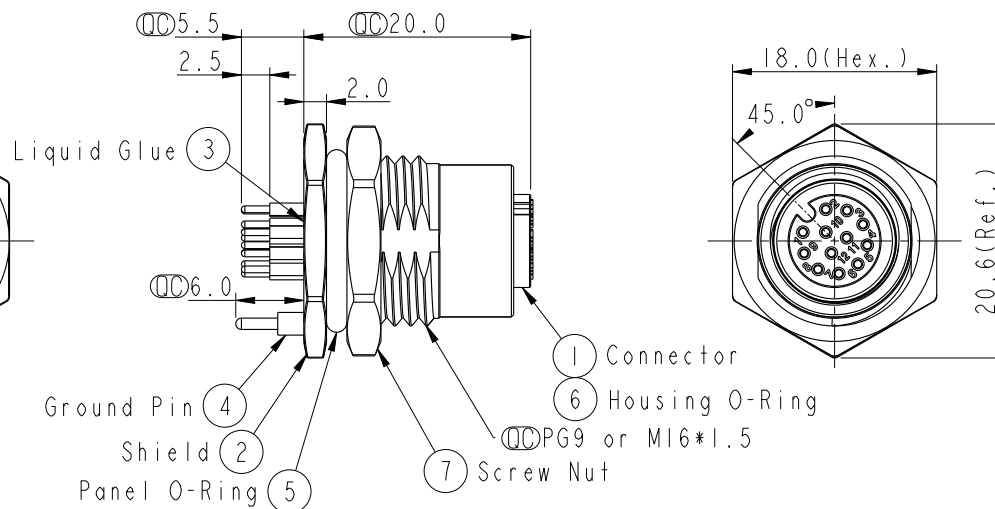




- *  Important Dimension.
- *  Waterproof Rate: IP68, IP69K.
- * Housing: Nylon+GF, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Shield: Zinc Alloy, Nickel Plated.
- * Ground Pin: Copper Alloy, Gold Plated.
- * Screw Nut: Zinc Alloy, Nickel Plated.
- * Panel O-Ring: Viton, Black.
- * Housing O-Ring: Viton, Green.
- * Rated Voltage: 3 & 4Pin 250V dc. or ac.
5Pin 60V dc. or ac.
6~12Pin 30V dc. or ac.
- * Rated Current: 3~5Pin 4A
6~8Pin 2A
10~12Pin 1.5A
- * Operating Temperature: -40~105°C
- * For Panel Thickness Max 4.5mm.
- * Recommended Nut Torque: 4-6 Kgf.cm.

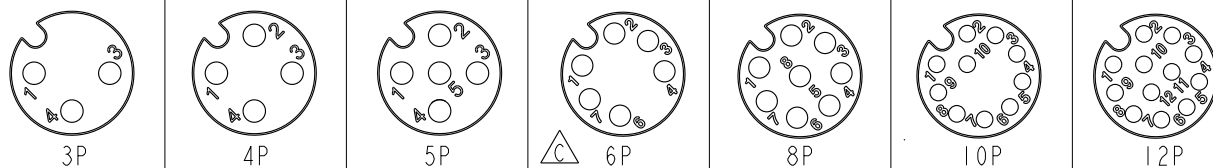

Pin Assignment Front View

UNIT : mm		
TOLERANCE		
.X	±0.25	
.XX	±0.1	
.XXX	±0.05	
ANGLES	±°	

TITLE			M12 A-Code Female Conn. PCB Type Shielded		
SCALE		2:1	SIZE		A4
SHEET		1	OF		2
REV.		C	WC-REV.		A.5
					QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Yulong_wang	2016-08-09
DWG NO	CHECKED BY	DATE
MSAS-XXPFFP-SF8XXX	Jinhai	2016-08-09
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2016-08-09

M SAS - XX P F F P - S F 8 XXX

SAS: A-Code Shielded

03: 3Pin

04: 4Pin

05: 5Pin

06: 6Pin 

08: 8Pin

10: 10Pin

12: 12Pin

P: Panel (板端)

F: Female Connector (母座)

001: PG9

002: M16*1.5







8: IP68/69K (防水等級68/69K) 

F: Front Fasten (前鎖式/Enclosure Rear Mount)

S: Screw (螺紋式)

P: PCB THT/DIP Type (180° 基板插件式)

F: Female Pin (母Pin)

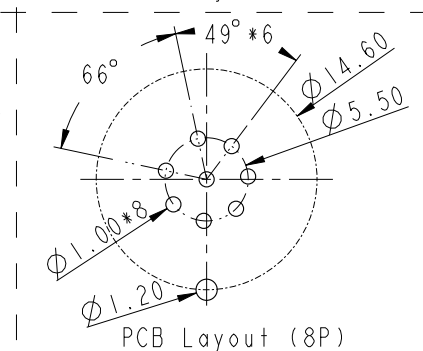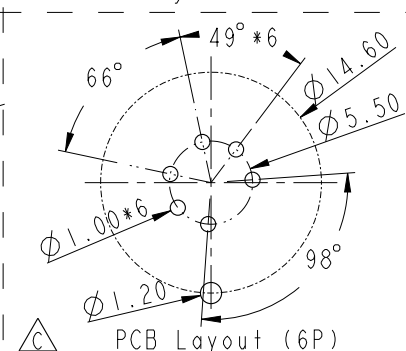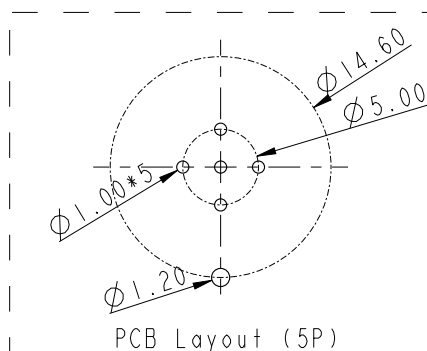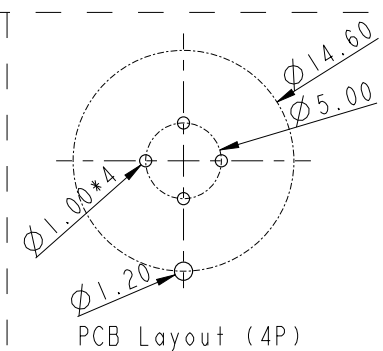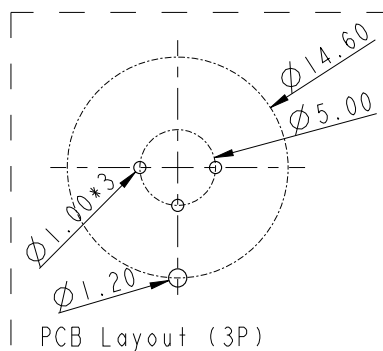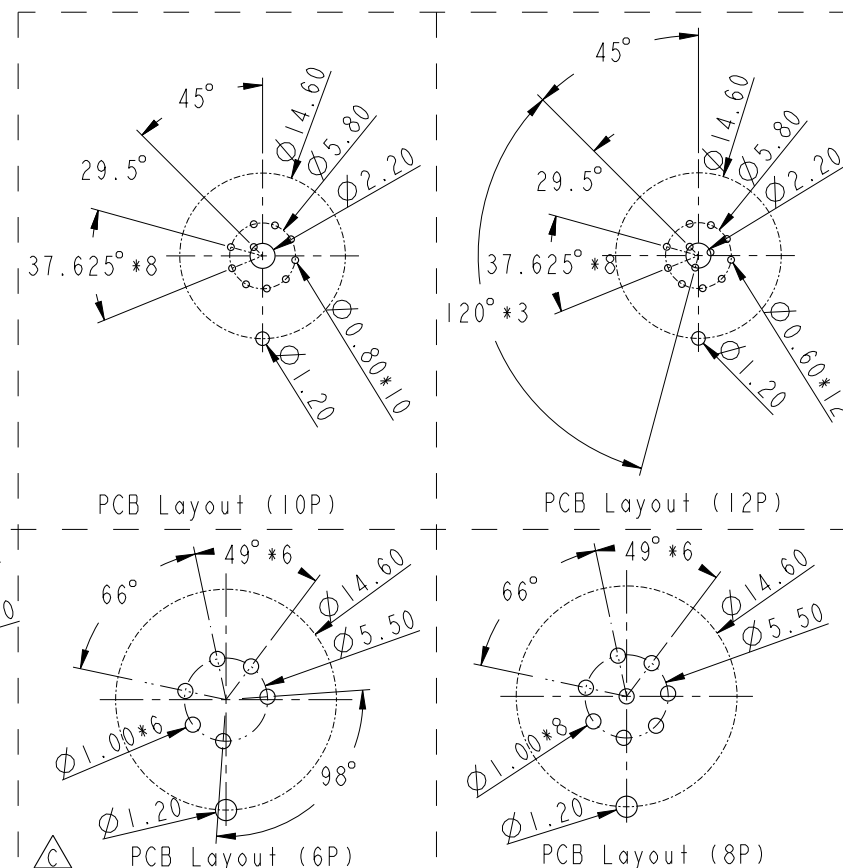

UNIT: mm				TITLE M12 A-Code Female Conn. PCB Type Shielded			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY Yulong_wang		DATE 2016-08-09	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±		SCALE 2:1		SIZE A4		SHEET 2 OF 2			DWG NO MSAS-XXPFFP-SF8XXX		CHECKED BY Jinhai		DATE 2016-08-09	
		REV. C		WC-REV. A.4		(QC): Inspection item		CUSTOMER ALTW		APPROVED BY Jerry		DATE 2016-08-09		