

CLAMPING SCREW ACCESS PORT (TYP.)

CONDUCTOR PORT (TYP.)

THREE PORT CONNECTOR BLOCK SHOWN WITH PLASTIC CLOSURE PLUGS REMOVED. SEE TABLE FOR DIMENSIONS OF PARTS



"N" PLCS

.35

.53 (TYP.)

L

THREE PORT CONNECTOR BLOCK SHOWN
WITH PLASTIC CLOSURE PLUGS REMOVED.
SEE TABLE FOR DIMENSIONS OF PARTS
WITH ADDITIONAL PORTS

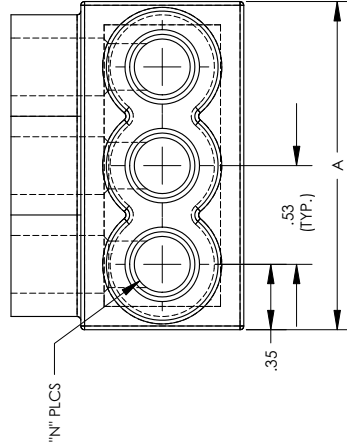

PANDUIT FINISHED GOODS P/N	CONDUCTOR RANGE	HEX KEY	SCREW QTY.	CAP (SCREW PORT) QTY.	CAP (WIRE PORT) QTY.	A	L	N	TIGHTENING TORQUE
PCSB2/0-2S-6	# 2/0 - #14 STR #10 - #14 SOL	3/16	2	2	2	152	1265	2	20 in/lb
PCSB2/0-3S-6Y		3/16	3	3	3	249	1937	3	
PCSB2/0-4S-6Y		3/16	4	4	4	286	2609	4	
PCSB2/0-5S-4Y		3/16	5	5	5	353	3281	5	
PCSB2/0-6S-4Y		3/16	6	6	6	420	3,953	6	
PCSB2/0-8S-3Y		3/16	8	8	8	555	5297	8	
PCSB2/0-10S-2Y		3/16	10	10	20	689	6,641	10	
PCSB2/0-12S-1Y		3/16	12	12	24	824	7,985	12	
PCSB2/0-14S-1Y		3/16	14	14	28	958	9,329	14	

1. UL486A-UL486B LISTED, DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4

3. STRIP LENGTH: .56 + .06/-0

5. VOLTAGE RATING: 600 V. MAX. BUILDING WIRE, 1000 V. MAX. IN SIGNS & FIXTURES.

7. CONNECTOR BLOCK BODY ARE MADE FROM ALUMINUM. CONDUCTOR PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.

9. INSULATION MATERIAL IS CLEAR PVC.

11. ALL DIMENSIONS SHOWN ARE NOMINAL.

13 PACKAGE QTY: -12 = 12 PCS.

 $-2 = 2 \text{ PCS.}$

14 THIS PART IS RoHS COMPLIANT



LISTED

[illegible]