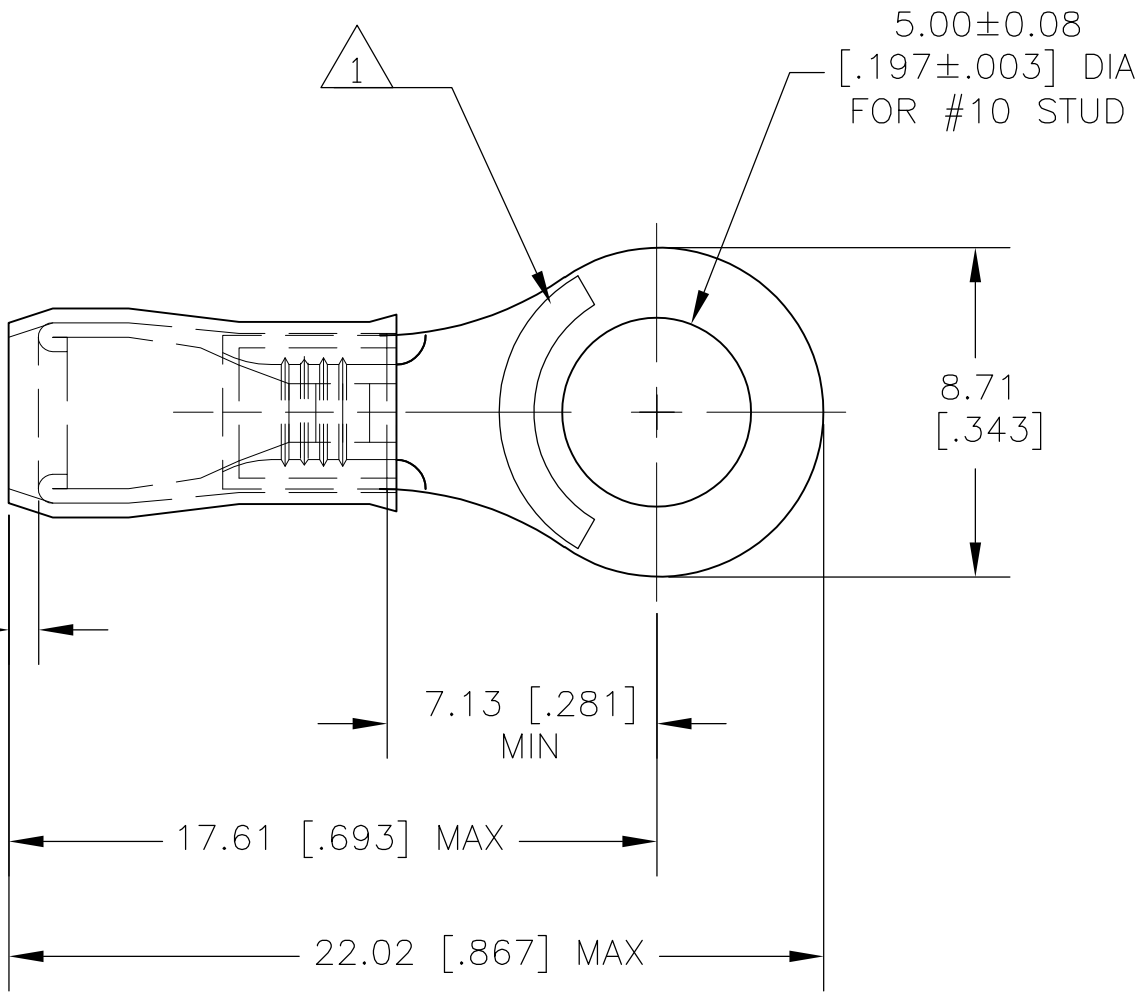


2		1				
LOC	DIST	REVISIONS				
G	14	P	LTR	DESCRIPTION	DATE	APVD
			G	REV PER ECR 09-025674	30NOV09	JR TM



- 1
- STAMP AMP 14-12, LOCATION AS SHOWN.
- 2
- WIRE INSULATION DIA RANGE IS 2.0-3.2
[.080-.125] DIA.
- 3
- TONGUE MATERIAL THK IS 0.75±0.05 [.0295±.002]
- 4
- DIMENSION APPLIES FROM CENTER OF STUD
HOLE TO EDGE OF WIRE BARREL.
- 5
- MATERIAL: BODY - COPPER PER ASTM B-152
SLEEVE - NYLON, COLOR WHITE
- 6
- FINISH: BODY - TIN PLATE PER ASTM B-545
- 7
- MAX RECOMMENDED OPERATING TEMP 105°C
- 8
- VOLTAGE RATING: 300 V MAX
- 9
- WIRE CROSS SECTIONAL AREA RANGE:
1.65-3.45mm2 [3,260-6,800] CMA

AMP
WIRE RANGE

14-12 AWG
SOLID OR STRANDED



500	LOOSE PIECE	152872
QTY	PACKAGING TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN jr ruth 23AUG07		 Tyco Electronics		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: MM [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		0 PLC ± —		RING TONGUE, PIDG, WIRE SIZE: 14-12 AWG —			
		1 PLC ± —					
		2 PLC ± 0.20 [.008]					
		3 PLC ± —		SIZE A3			
		4 PLC ± —					
		ANGLES ± 5°					
MATERIAL		FINISH		CAGE CODE 00779		DRAWING NO C-152872	
				RESTRICTED TO —			
CUSTOMER DRAWING				SCALE 5:1		SHEET 1 OF 1	
				REV G			