



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

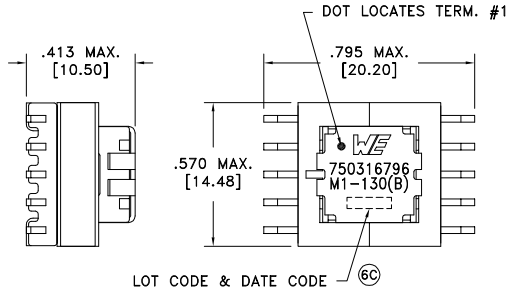

TERM. NO.'s FOR REF. ONLY





LOT CODE & DATE CODE (6C)

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	2.630 ohms ±10%
D.C. RESISTANCE	11-12 @20°C	0.28 mOhms max.
INDUCTANCE	2-4 10kHz, 100mVAC, Ls	22.40mH min.
DIELECTRIC	2-12 1500VAC, 2 seconds	-
TURNS RATIO	(2-4):(11-12)	200:1, ±1%

(6B)

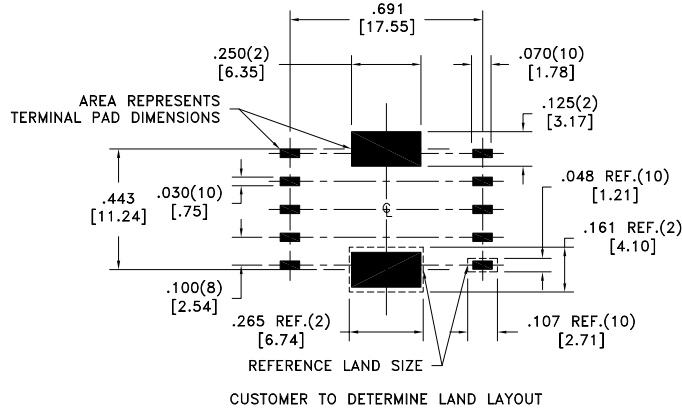

CUSTOMER TO DETERMINE LAND LAYOUT

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Voltage-time product: 496 Vusec min. on SEC based on unipolar waveform.

Recommended burden resistor: 200 Ohms

Current Rating: 40A on PRI

(6C) UL recognized class B insulation system M1-130(B), E106391.  
- Core is not considered to be dead metal.

(6C) Functional insulation only.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: <b>Tape &amp; Reel</b> PKG-1139 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>750316796</b>
6C	8/18			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750316796	compliant RoHS
6B	1/18	SEE REVISION SHEET FOR REVISION LEVEL				
6A	9/17					