

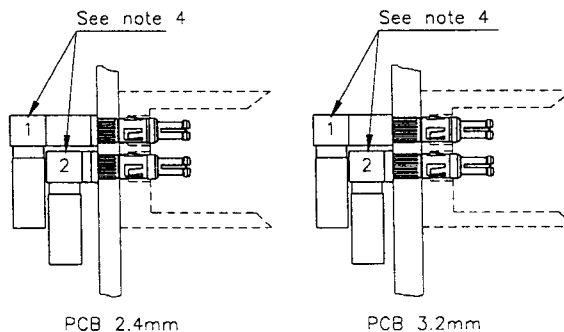


PRODUCT NR:	CABLES	ød1	ød2	ød3	ød4	d5	d6	d7
88977-001	RG 178B/U, RG196A/U	1.10	1.70	2.20	3.20	7.8	5.00	3.00
88977-002	RG188A/U, RG174A/U, RG316/U	1.70	2.50	2.90	3.60	9.0	5.00	3.00
88977-003	RG 179 75ohm (see note 2)							
88977-004	RG 178B/U, RG196A/U	1.10	1.70	2.20	3.20	7.8	9.00	7.00
88977-005	RG188A/U, RG174A/U, RG316/U	1.70	2.50	2.90	3.60	9.0	9.00	7.00
88977-006	RG 179 75ohm (see note 2)							

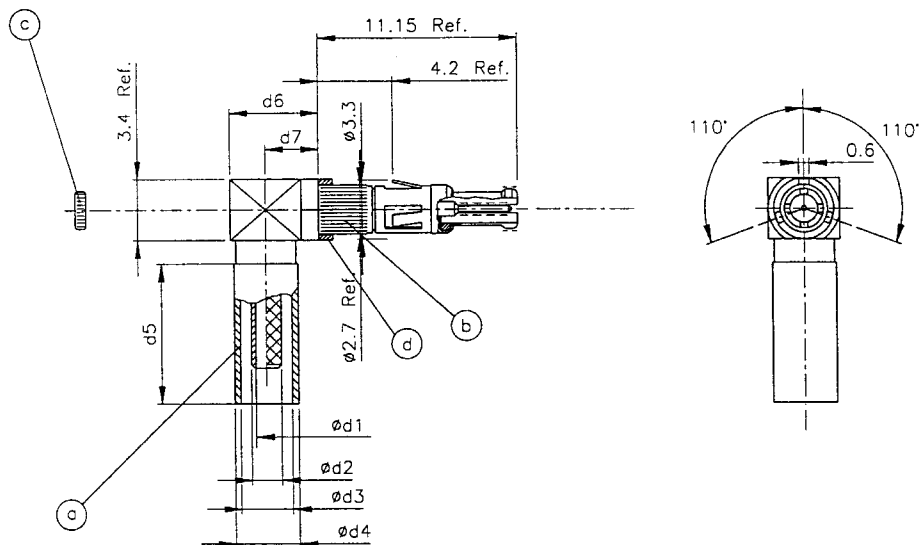

1.27µm Au Min.
Plating on contact area

RECOMMENDED HOLE PATTERN

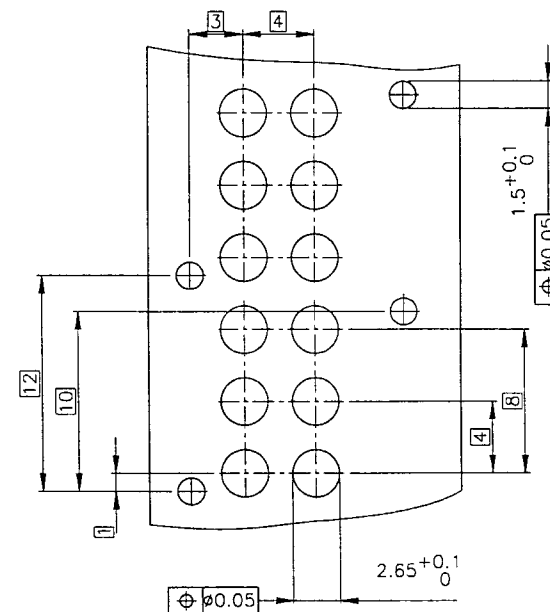

NOTES:

- 1 All dimension shown are references.
- 2 When used with 75ohm cables the performance of the contact will be lower.
- 3 Assemble product in accordance with TA-597.
- 4 Contact numbers 1 is product dash numbers -004 to -006 and contact number 2 is product dash numbers -001 to -003.
- 5 This product will be packed in a plastic bag containing four parts, as follows:
 - a: Crimp ferrule.
 - b: Outer contact.
 - c: Plug.
 - d: Spacer. (This is used if you have a PCB of 2.4mm Thk.)
- 6 The PCB thickness range is 2.25-3.25mm for this product.

mat'l code				tolerances unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS	
lth	ecm no	dr	date	linear		projection	hite	R.A. CTW HEADER	
A	H30693	DAN	931022					50Ω MINI COAX	
B	H40086	DAN	940203						
C	H60472	RM	960723	angles					
D	H70499	DOB	970805	dr	D.Andrews	931022	mm	product family	METRAL (tm)
				engr	D.Andrews	931022	size	dwg no	213
				chr	R.Vasschers	931022	scale		sheet
				addl	H.Cooijmans	960723	5:1	A2	88977
sheet index	revision	0							1 of 1