
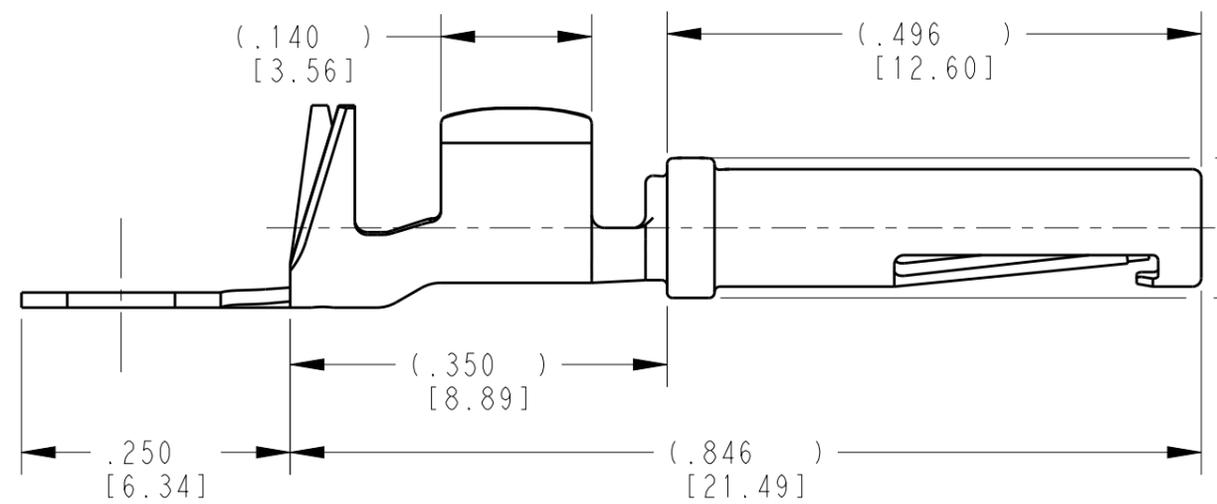
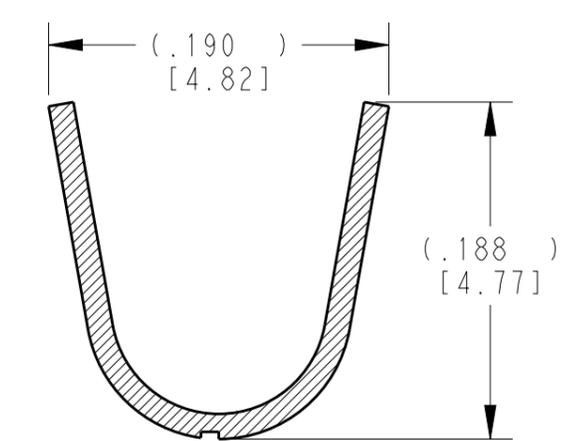
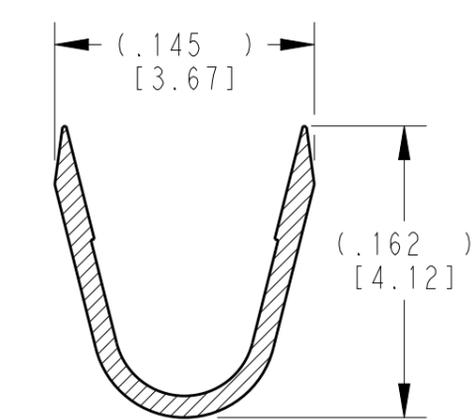
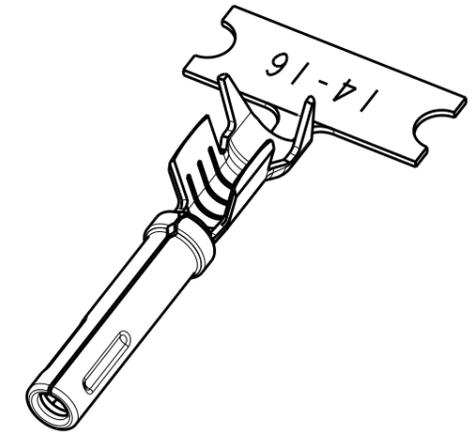


THIS DRAWING IS UNPUBLISHED  
 RELEASED FOR PUBLICATION 2015  
 © COPYRIGHT 2005 BY TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	NC	NEW RELEASE PER E.O. PI8906	07AUG2005	VT	RDR
	A	REVISED PER E.O PI9555	07NOV2007	JA	RDR
	B	REVISED PER E.O P20396	25JUN2010	JA	RDR
	C	REVISED PER ECO-15-007761	28MAY2015	RL	DM

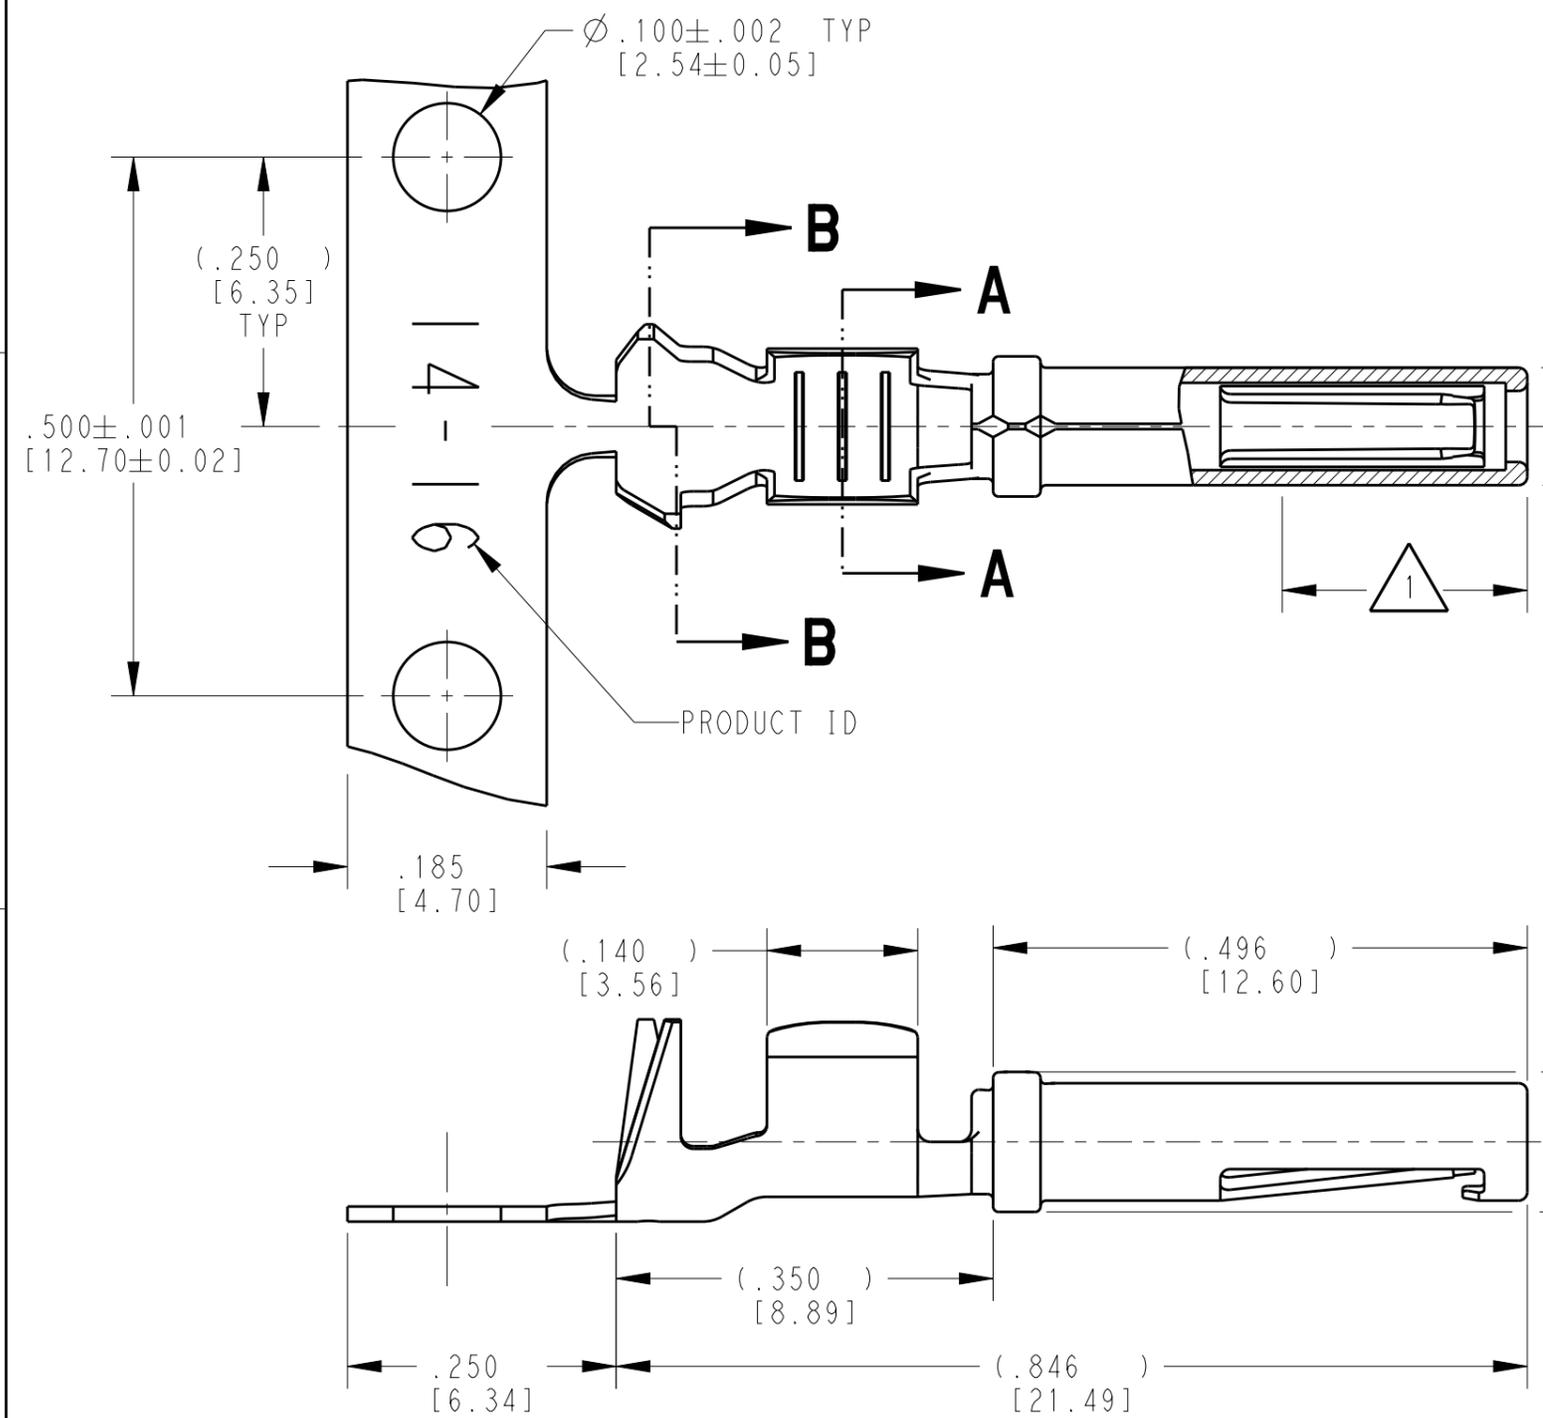

- 3 MATERIAL: .014 [0.36] THICK CU ALLOY
- 2. WIRE RANGE: 16 AWG TO 12 AWG [1.0-2.5 mm<sup>2</sup>]  
INSULATION RANGE: Ø.075-.140 [Ø1.91-3.56]
- 1 APPLIES ONLY TO SELECTIVE GOLD 1062-16-1444.  
INDICATED DIMENSION SHOWS GOLD PLATED AREA.

NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES [mm]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±
	1 PLC ±
	2 PLC ±
	3 PLC ±.025 [0.64]
	4 PLC ±
	ANGLES ±
MATERIAL	FINISH
3	SEE TABLE

DWN	16MAY2005
DAVID MEYER	
CHK	26JUN2005
DAVID MEYER	
APVD	29JAN2005
VLADIMIR TOMSA	
PRODUCT SPEC	0425-015-0000
APPLICATION SPEC	0425-039-0000
WEIGHT	0.52 g
Customer Drawing	

TE INTERNAL PN	DEUTSCH PN	PLATING
1062-16-1422	1062-16-1422	NICKEL
1062-16-1444	1062-16-1444	SELECTIVE GOLD
1062-16-1477	1062-16-1477	TIN



NAME SOCKET, STAMPED AND FORMED SIZE 16 12-16AWG			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	©=1062-16-14XX	-
SCALE 6:1		SHEET 1 OF 1	REV C