

NOTES

915512-2 AGE 1 OF


0038692


THE + MAGNETIC FLUX IS IN THIS DIRECTION (THIS ASSUMES THE CONVENTION THAT THE DIRECTION OF THE EXTERNAL FLUX OF A MAGNET IS FROM THE NORTH TO THE SOUTH POLE OF THE MAGNET)

AT 25°C AND 2,200 OHM LOAD

ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THAT THE DEVICE WILL WITH-STAND WITHOUT DAMAGE TO THE DEVICE. HOWEVER, THE ELECTRICAL AND MAGNETIC CHARACTERISTICS ARE NOT GUARANTEED AS THE MAXIMUM LIMITS (ABOVE RECOMMENDED OPERATING CONDITIONS) ARE APPROACHED NOR WILL THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATING

4 REFERENCE CURVES

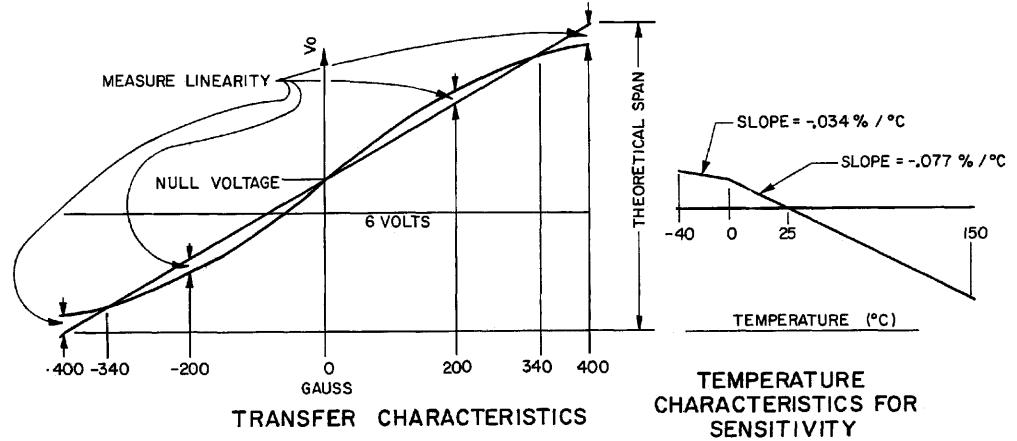

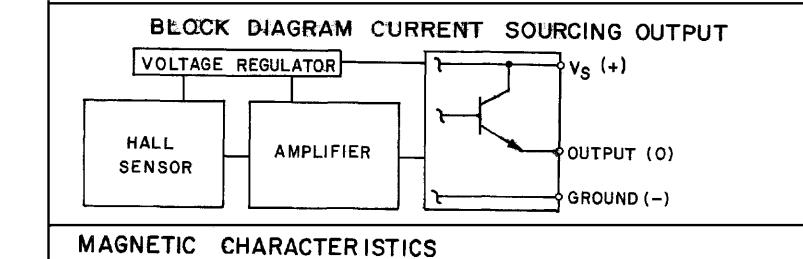

PARAMETER	PERFORMANCE @ 12 VDC		
	TYPICAL	MAX TOLERANCE	
SPAN (-400 TO +400 GAUSS)	6.00 VDC		
NULL (OFFSET AT 0 GAUSS)	6 VDC	±0.6 VDC	
SENSITIVITY (MV/GAUSS) (V <sub>O</sub> @ 340g - V <sub>O</sub> @ ~340g)/680	7.5	±.2	
LINEARITY % OF SPAN		±1.5%	
TEMPERATURE ERROR NULL % OF SPAN -40°C TO 150°C -25°C TO 85°C 0°C TO 50°C		±5ዩ ±3ዩ ±2ዩ	
	SPAN (-400 TO +400 GAUSS)  NULL (OFFSET AT 0 GAUSS)  SENSITIVITY (MV/GAUSS) (V <sub>O</sub> @ 340g - V <sub>O</sub> @ -340g)/680  LINEARITY % OF SPAN  TEMPERATURE ERROR NULL % OF SPAN -40°C TO 150°C -25°C TO 85°C	TYPICAL   SPAN	

ELECTRICAL CHARACTERISTICS				
	24°C	-40°C TO +150°C	REMARKS	
SUPPLY CURRENT (MAX)	16 m A	. <del>l9 m</del> A·	EXCLUDING LOAD CURRENT 8 TO 16 VDC SUPPLY VOLTAGE	
		,		

-0.034%/°C

-0.077%/°C

ABSOLUTE MAXIMUM RATING		
SUPPLY VOLTAGE	-0.5 TO +18.0 VDC	
OUTPUT CURRENT	(O mA MAX	
STORAGE TEMPERATURE	-40°C TO 150°C	
MAGNETIC FLUX	NO LIMIT, THE CIRCUIT CANNOT BE DAMAGED BY MAGNETIC OVERDRIVE	



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

-40°C TO 0°C

0°C TO 150°C

**MICRO SWITCH** MASTER REDUCED a Honeywell Division

SOLID STATE LINEAR OUTPUT HALL

CATALOG LISTING 91\$\$12-2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE (0)  $\pm$  0.040 ONE PLACE (0.0) <u>+</u> 0.030 (0.00)  $\pm$  0.015 TWO PLACE **ANGLES** ± -

**RASTER** 

ANSI Y14.5M-1982 APPLIES

FED. MFG. CODE 81929

**EFFECT TRANSDUCER** 

THIRD ANGLE PROJECTION

DO NOT SCALE PRINT

WEIGHT

SCALE -