


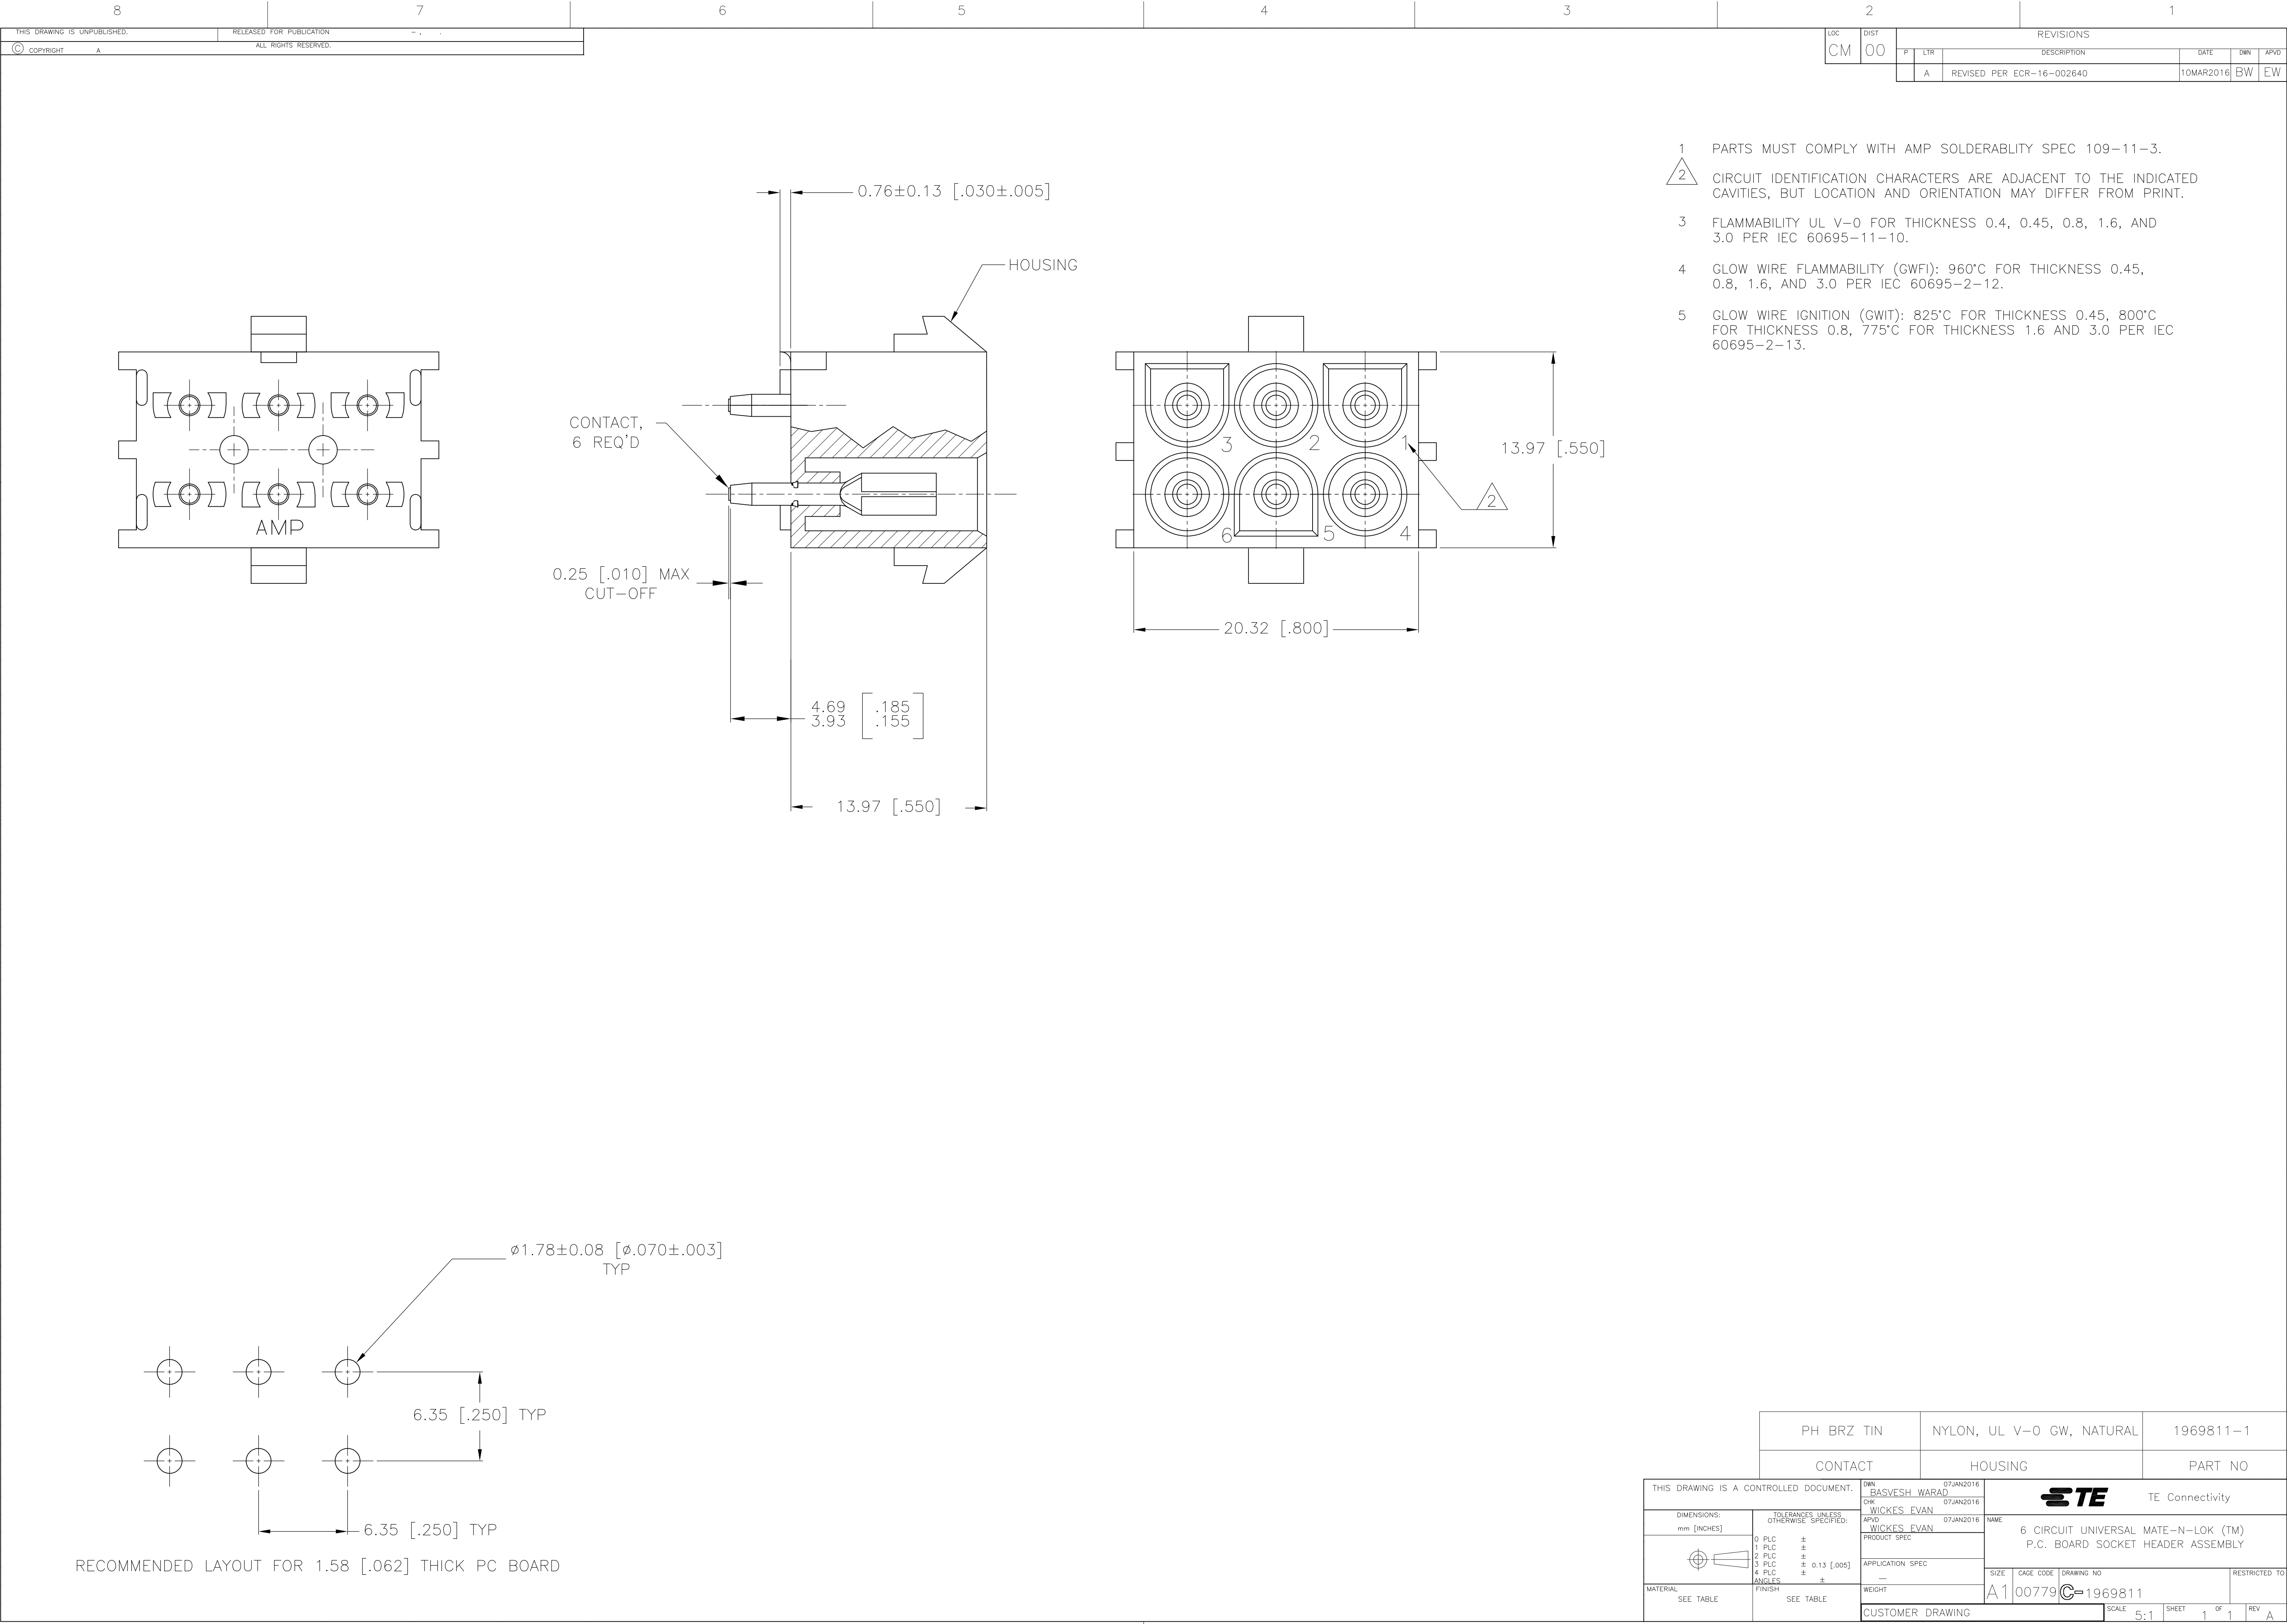

LOC		DIST		REVISIONS			
CM	00	P	LTR	DESCRIPTION		DATE	DWN APVD
		A		REVISED PER ECR-16-002640		10MAR2016	BW EW

- 1
- PARTS MUST COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
- 2
- CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 3
- FLAMMABILITY UL V-0 FOR THICKNESS 0.4, 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-11-10.
- 4
- GLOW WIRE FLAMMABILITY (GWFI): 960°C FOR THICKNESS 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-2-12.
- 5
- GLOW WIRE IGNITION (GWIT): 825°C FOR THICKNESS 0.45, 800°C FOR THICKNESS 0.8, 775°C FOR THICKNESS 1.6 AND 3.0 PER IEC 60695-2-13.

PH BRZ TIN	NYLON, UL V-0 GW, NATURAL	1969811-1
CONTACT	HOUSING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BASVESH WARAD 07JAN2016	TE Connectivity	
		CHK WICKES EVAN 07JAN2016		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD WICKES EVAN 07JAN2016	NAME	
			6 CIRCUIT UNIVERSAL MATE-N-LOK (TM) P.C. BOARD SOCKET HEADER ASSEMBLY	
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 0.13 [.005] 4 PLC ± ANGLES ±	APPLICATION SPEC ---	SIZE	
			A100779	
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	DRAWING NO 1969811	
CUSTOMER DRAWING		SCALE 5:1	SHEET 1	REV A