

#### **RONDA-ZT45**

Double asymmetric beam for wall-washing and aisle lighting with holder A compatible with 3rd party connectors from TE, Bender+Wirth and IDEAL

#### **TECHNICAL SPECIFICATIONS:**

Dimensions Ø 69.9 mm

Height 15 mm
Fastening socket
ROHS compliant yes 1



### **MATERIAL SPECIFICATIONS:**


ComponentTypeMaterialColourFinishRONDA-ZT45Single lensPMMAclearRONDA-HLD-AHolderPCwhite

#### **ORDERING INFORMATION:**

Component Qty in box MOQ MPQ Box weight (kg)
FN15388\_RONDA-ZT45 Single lens 420 120 30 0.0

» Box size:




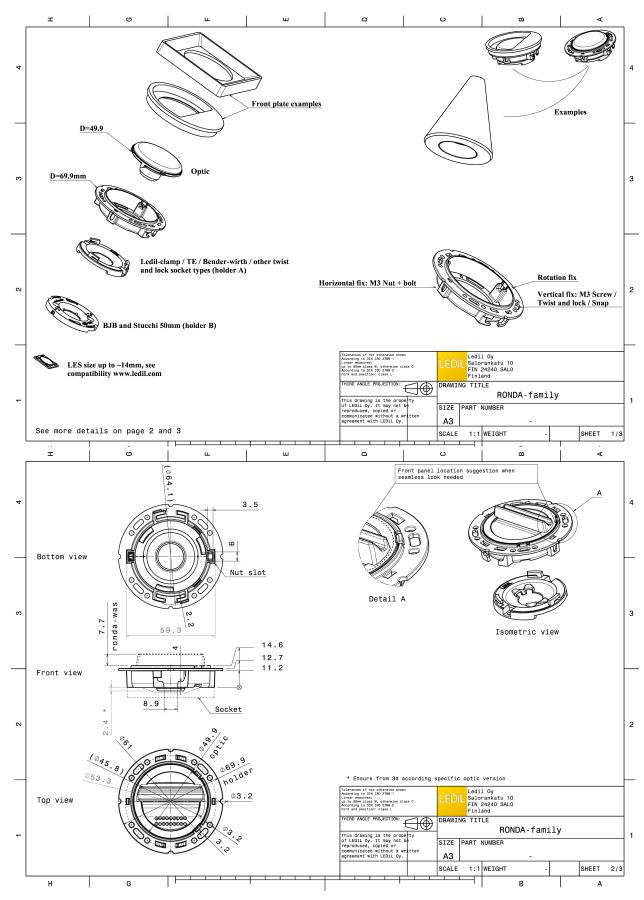

Last update: 25/05/2018


Subject to change without prior notice



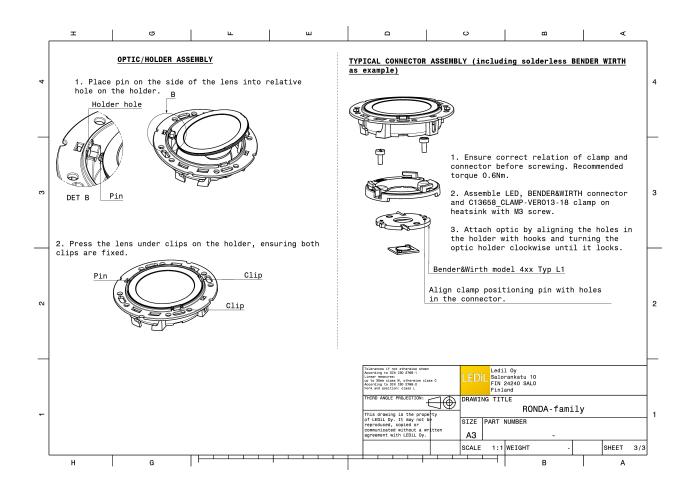

4/16

#### PHOTOMETRIC DATA (MEASURED):

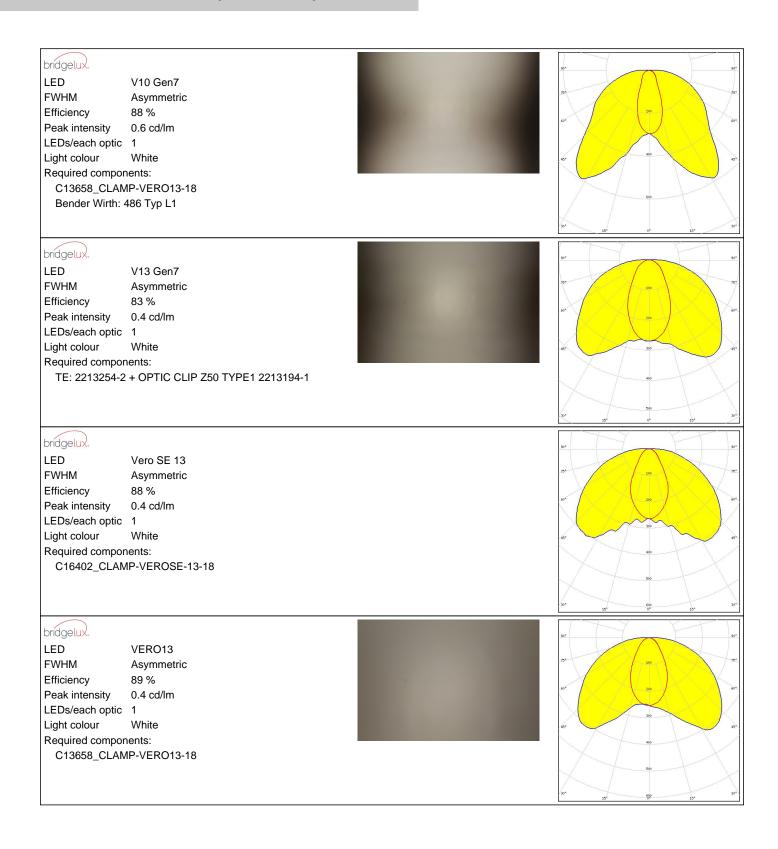


#### PHOTOMETRIC DATA (MEASURED):

# **CITIZEN**

LED CLL03x/CLU03x **FWHM** Asymmetric 86 % Efficiency Peak intensity 0.4 cd/lm LEDs/each optic 1 Light colour White Required components:

TE: 2325807-3

C16791\_CLAMP-Z45-A




### **CITIZEN**

LED CLL03x/CLU03x **FWHM** Asymmetric 83 % Efficiency Peak intensity 0.4 cd/lm LEDs/each optic 1

White Light colour Required components:

IDEAL: 50-2103CT + 50-2100AN




### **CITIZEN**

CLL04x/CLU04x LED **FWHM** Asymmetric Efficiency 84 % Peak intensity 0.4 cd/lm

LEDs/each optic 1 Light colour White Required components:

IDEAL: 50-2204-CT + 50-2100AN




# **CITIZEN**

CLU730/731 **FWHM** Asymmetric Efficiency 85 % Peak intensity 0.4 cd/lm LEDs/each optic 1 White

Light colour Required components:

IDEAL: 50-2204-CT + 50-2100AN




#### PHOTOMETRIC DATA (MEASURED):

# CREE 💠

LED CMA1840
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C14123\_CLAMP-CXA15-18




### CREE ÷

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM Asymmetric
Efficiency 87 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components: TE: 2213401-2 + OPTIC CLIP Z50 TYPE1 2213194-1




# CREE 🚓

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM Asymmetric
Efficiency 90 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C14123\_CLAMP-CXA15-18




### **WNICHIA**

LED COB J-Type
FWHM Asymmetric
Efficiency 83 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White

Required components:

IDEAL: 50-2103NC + 50-2100AN



#### PHOTOMETRIC DATA (MEASURED):


#### **WNICHIA**

LED COB L-Type (LES 11)

**FWHM** Asymmetric 87 % Efficiency Peak intensity 0.5 cd/lm LEDs/each optic 1

Light colour White Required components:

TE: 2213382-2 + OPTIC CLIP Z50 TYPE1 2213194-1




#### **WNICHIA**

COB L-Type (LES 11) LED

**FWHM** Asymmetric 84 % Efficiency Peak intensity 0.5 cd/lm LEDs/each optic 1 White Light colour Required components:


IDEAL: 50-2100NC + 50-2100AN



LED PrevaLED Core G7 L15 H1

**FWHM** Asymmetric Efficiency 78 % Peak intensity 0.4 cd/lm LEDs/each optic 1 Light colour White

Required components: C16685\_CLAMP-PRV-A




# OSRAM Opto Semiconductors

LED Soleriq S13 19x19 **FWHM** Asymmetric Efficiency 86 % 0.4 cd/lm Peak intensity LEDs/each optic 1 White Light colour

Required components:

TE: 2213254-2 + OPTIC CLIP Z50 TYPE1 2213194-1




#### PHOTOMETRIC DATA (MEASURED):

#### **OSRAM**

LED Soleriq S13 19x19
FWHM Asymmetric
Efficiency 84 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1

Light colour White Required components:

IDEAL: 50-2103CT + 50-2100AN




#### PHILIPS

LED Fortimo SLM L13 + SLM holder

FWHM Asymmetric
Efficiency 83 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

TE: OPTIC CLIP Z50 TYPE1 2213194-1






### **PHILIPS**

LED Fortimo SLM L13 CoB

FWHM Asymmetric
Efficiency 83 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

TE: 2213130-2 + OPTIC CLIP Z50 TYPE1 2213194-1






# PHILIPS

LED Fortimo SLM L15 + SLM holder


FWHM Asymmetric
Efficiency 82 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

TE: OPTIC CLIP Z50 TYPE1 2213194-1





### PHOTOMETRIC DATA (MEASURED):

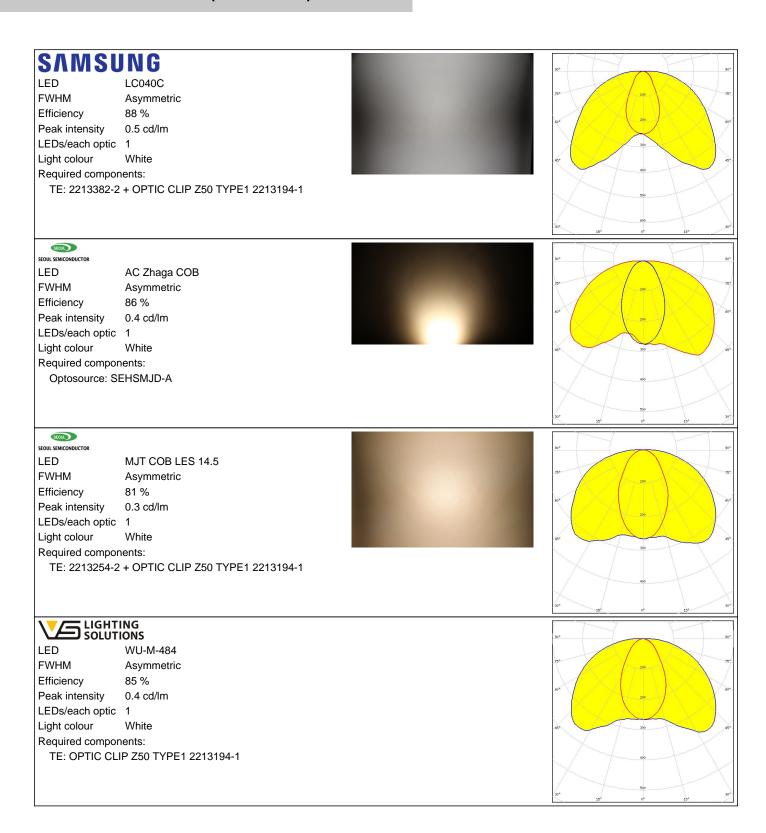

### PHOTOMETRIC DATA (SIMULATED):

bridgelux


LED V10 Gen6
FWHM 44.0°
Efficiency %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C14123\_CLAMP-CXA15-18

bridgelux.

LED V10 Gen6
FWHM Asymmetric
Efficiency 86 %
LEDs/each optic 1
Light colour White
Required components:


C13658\_CLAMP-VERO13-18 Bender Wirth: 455 Typ L1



bridgelux.

LED V10 Gen6
FWHM Asymmetric
Efficiency 86 %
LEDs/each optic 1
Light colour White
Required components:


C14123\_CLAMP-CXA15-18



bridgelux.

LED V13 Gen7
FWHM Asymmetric
Efficiency 90 %
LEDs/each optic 1
Light colour White
Required components:

IDEAL: 50-2103CT + 50-2100AN




10/16

#### PHOTOMETRIC DATA (SIMULATED):

#### bridgelux

LED V13 Gen7 **FWHM** Asymmetric 86 % Efficiency Peak intensity 0.4 cd/lm LEDs/each optic Light colour White Required components:


C13658\_CLAMP-VERO13-18 Bender Wirth: 477 Typ L1



#### bridgelux.

LED V13 Gen7 **FWHM** 56.0° 85 % Efficiency Peak intensity 1 cd/lm LEDs/each optic 1 White Light colour Required components:

C14123\_CLAMP-CXA15-18 Bender Wirth: 477 Typ L1




# **CITIZEN**

LED CLL02x/CLU02x (LES10)

**FWHM** Asymmetric Efficiency 86 % LEDs/each optic Light colour White Required components:


C13658\_CLAMP-VERO13-18 Bender Wirth: 434 Typ L1



# **CITIZEN**

LED CLU700/701/702 **FWHM** Asymmetric Efficiency 87 % LEDs/each optic White Light colour Required components:

C13658\_CLAMP-VERO13-18 Bender Wirth: 434 Typ L1






#### PHOTOMETRIC DATA (SIMULATED):

# **CITIZEN**

CLU710/711 LED **FWHM** Asymmetric Efficiency 87 % LEDs/each optic Light colour White Required components:


C13658\_CLAMP-VERO13-18 Bender Wirth: 470 Typ L1



# CREE ÷

LED CXA/B 13xx **FWHM** Asymmetric Efficiency 88 % LEDs/each optic 1 White Light colour Required components:

C13658\_CLAMP-VERO13-18 Bender Wirth: 448 Typ L1



# **CREE** <del>+</del>

LED CXA/B 15xx **FWHM** Asymmetric Efficiency 87 % LEDs/each optic Light colour White Required components: C14123\_CLAMP-CXA15-18

# CREE 💠

LED CXA/B 15xx **FWHM** 42.0° % Efficiency LEDs/each optic White Light colour Required components: C14123\_CLAMP-CXA15-18

#### PHOTOMETRIC DATA (SIMULATED):

# CREE 🚓

LED CXA/B 15xx
FWHM Asymmetric
Efficiency 87 %
LEDs/each optic 1
Light colour White
Required components:

C13658\_CLAMP-VERO13-18 Bender Wirth: 441 Typ L1

# CREE 🕏

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM Asymmetric
Efficiency 87 %
LEDs/each optic 1
Light colour White
Required components:

C14123\_CLAMP-CXA15-18

# CREE 🕏

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM 48.0°
Efficiency %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C14123\_CLAMP-CXA15-18


# CREE 💠

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM Asymmetric

Efficiency %
LEDs/each optic 1
Light colour White
Required components:

TE: 2213401-2 + OPTIC CLIP Z50 TYPE1 2213194-1



#### PHOTOMETRIC DATA (SIMULATED):

# CREE 🚓

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM Asymmetric
Efficiency 87 %
LEDs/each optic 1
Light colour White
Required components:

C13658\_CLAMP-VERO13-18 Bender Wirth: 437 Typ L1

# CREE 🕏


LED CXA/B 1830
FWHM Asymmetric
Efficiency 85 %
LEDs/each optic 1
Light colour White
Required components:
C14123\_CLAMP-CXA15-18

# **UMILEDS**

LED LUXEON CoB 1202/1203

FWHM Asymmetric
Efficiency 86 %
LEDs/each optic 1
Light colour White
Required components:

TE: 2213382-2 + OPTIC CLIP Z50 TYPE1 2213194-1




# **DESCRIPTION** LUMILEDS

LED LUXEON CoB 1202s

FWHM Asymmetric
Efficiency 87 %
LEDs/each optic 1
Light colour White
Required components:

C13658\_CLAMP-VERO13-18 Bender Wirth: 452 Typ L1



14/16



#### PHOTOMETRIC DATA (SIMULATED):


#### **WNICHIA**

LED COB L-Type (LES 9)

**FWHM** Asymmetric 85 % Efficiency LEDs/each optic Light colour White

Required components:

TE: 2213382-2 + OPTIC CLIP Z50 TYPE1 2213194-1



#### **WNICHIA**

LED NSCxL036A **FWHM** Asymmetric Efficiency 87 % LEDs/each optic 1 White Light colour Required components:

TE: 2213382-2 + OPTIC CLIP Z50 TYPE1 2213194-1

# OSRAM Opto Semiconductors

LED Duris S10 **FWHM** Asymmetric Efficiency 87 % LEDs/each optic Light colour White Required components:


C13658\_CLAMP-VERO13-18

# **SHARP**

LED Mini Zenigata (GW6BM)

**FWHM** Asymmetric Efficiency 86 % LEDs/each optic White Light colour Required components:

C13658\_CLAMP-VERO13-18 Bender Wirth: 452 Typ L1





#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

#### Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

www.ledil.com/ where\_to\_buy