


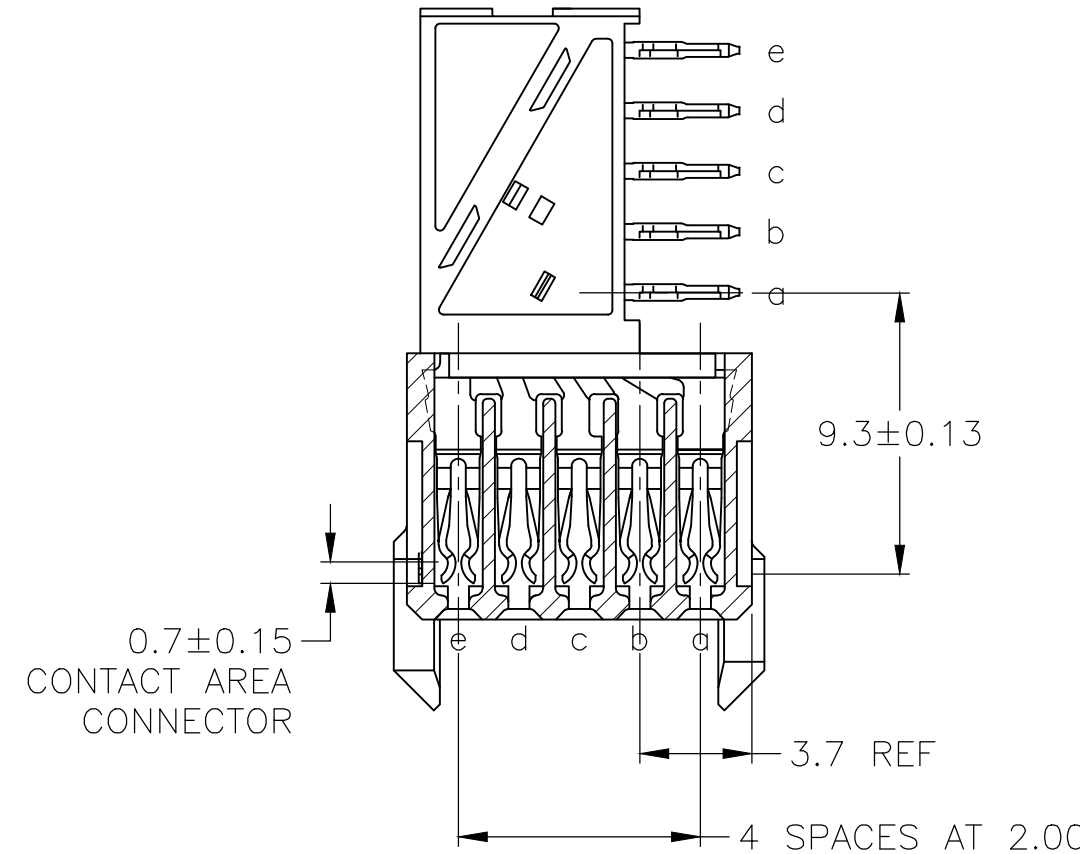
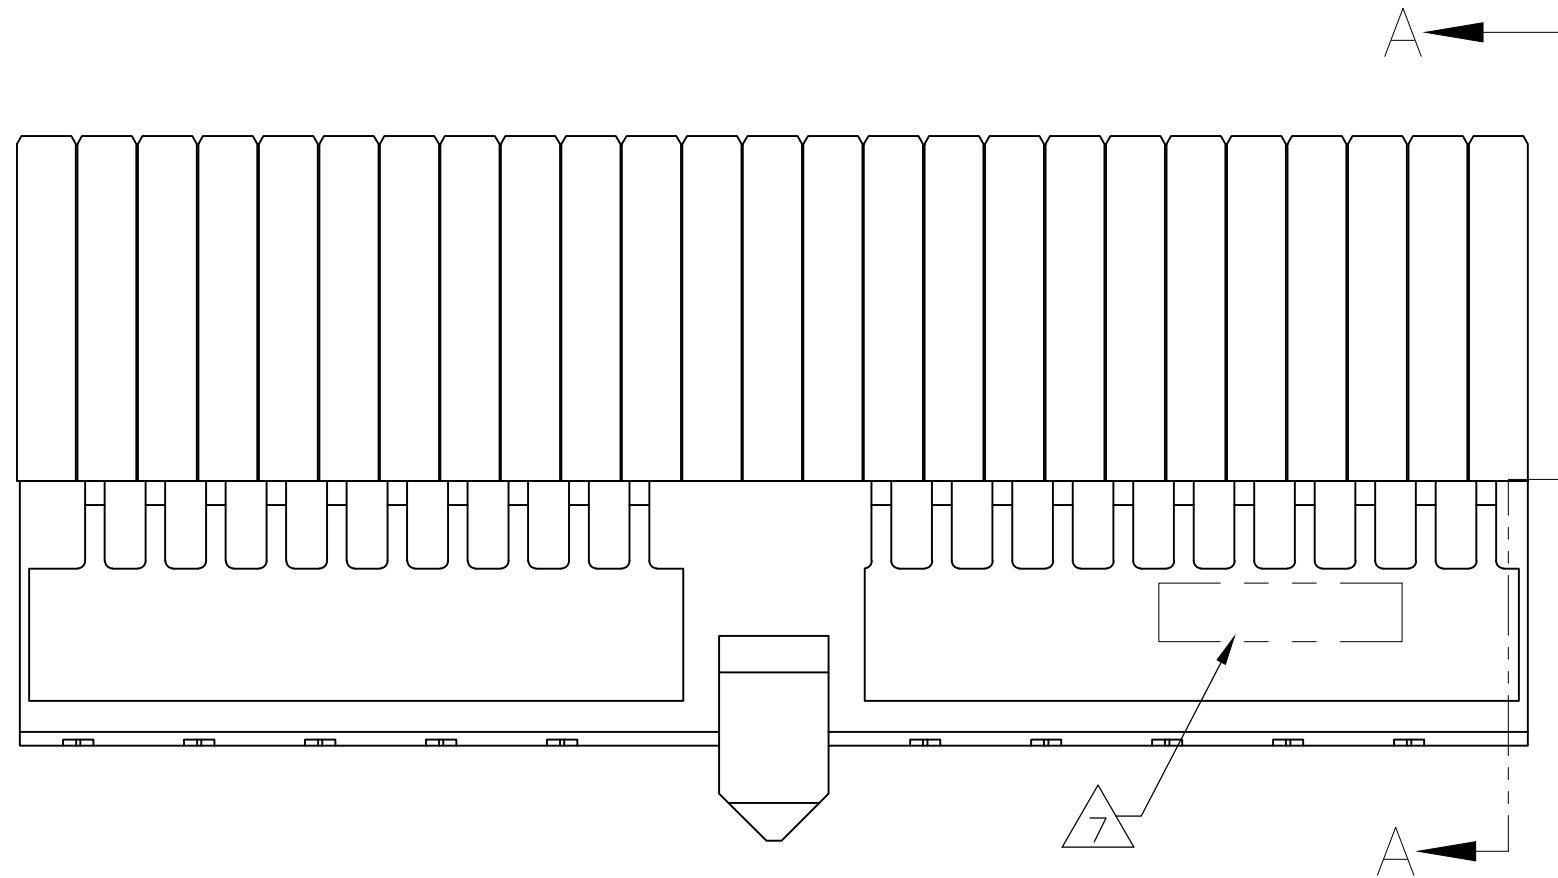


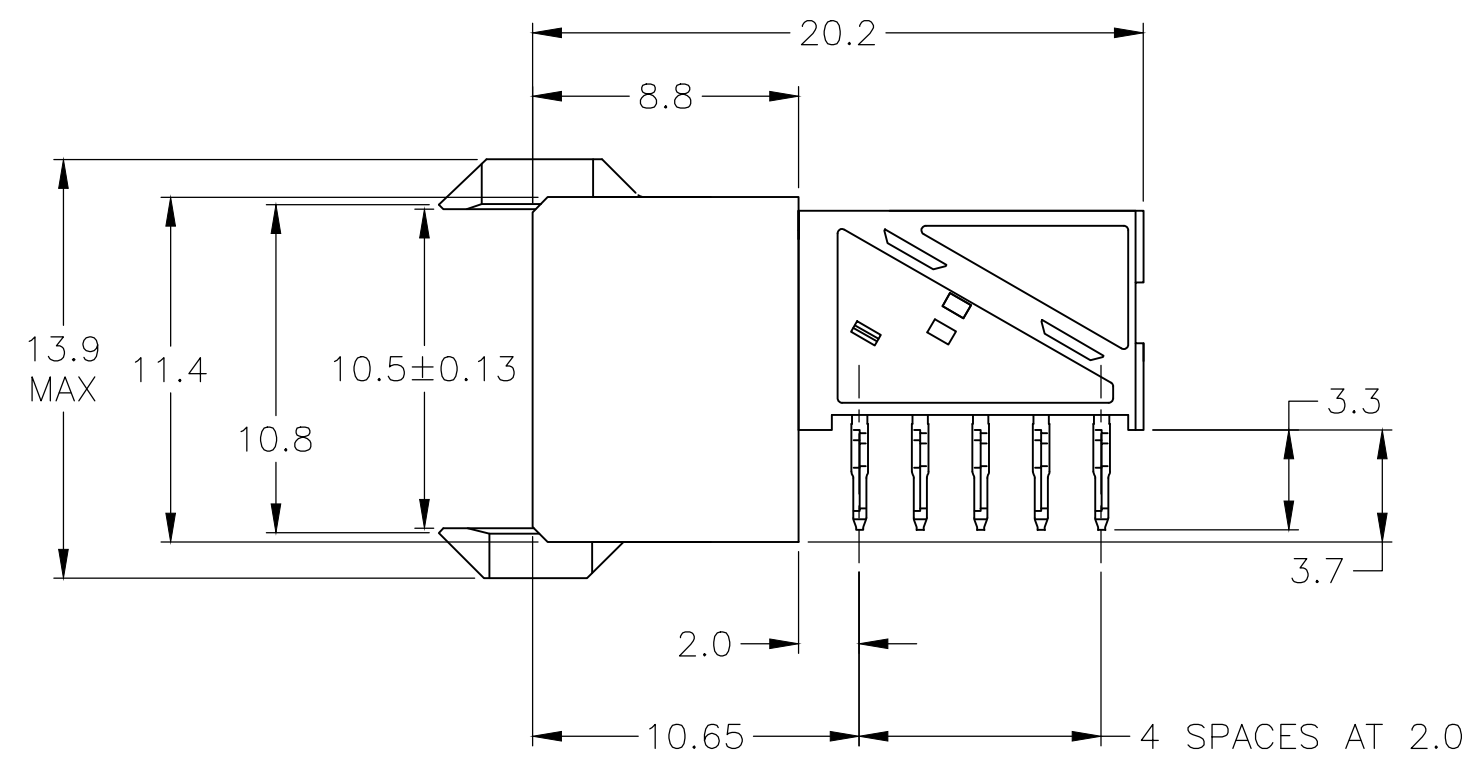

SECTION A-A

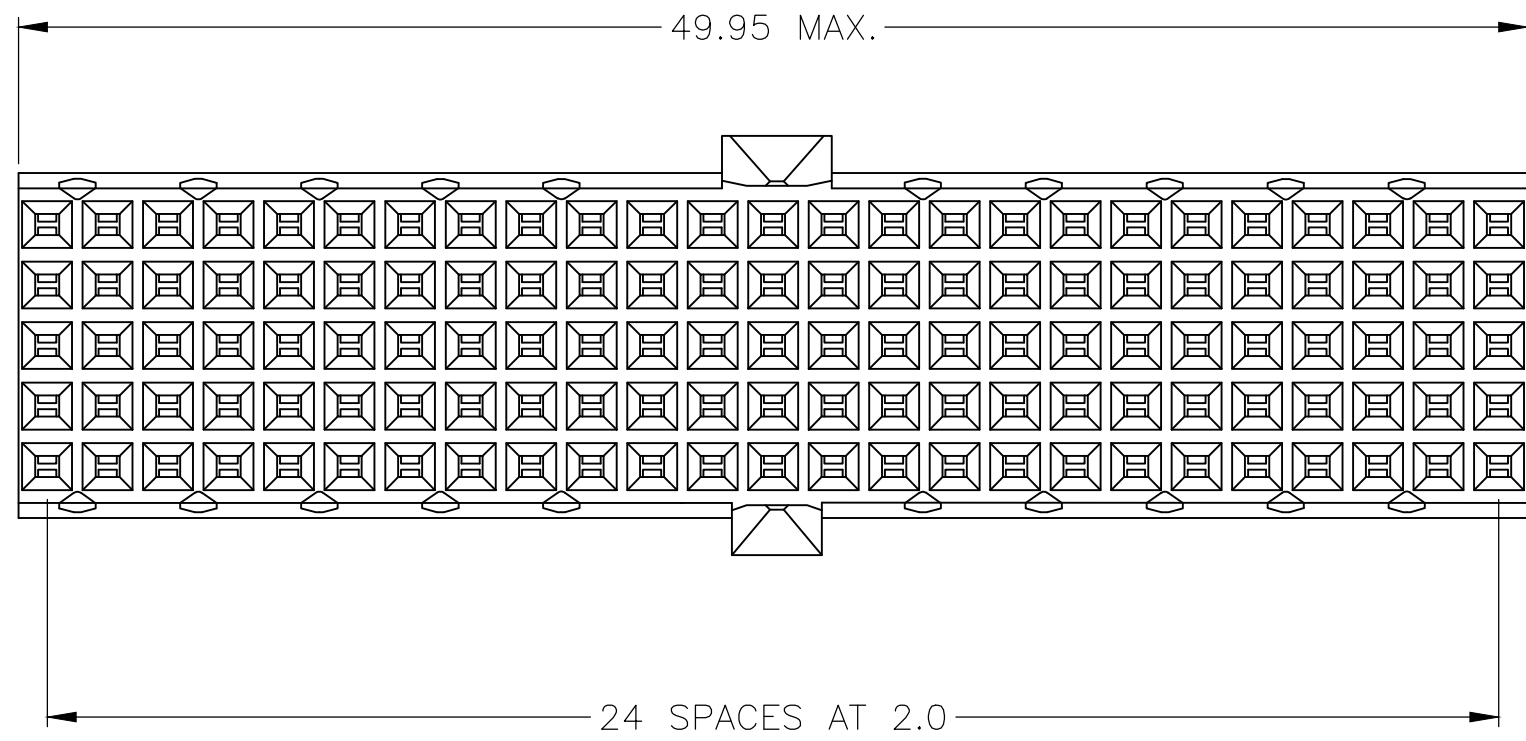

- 1 MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.
- 4 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.
- 5 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.
- 6 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIROMENT APPLICATIONS.
- 7 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- 8 HOLE PATTERN FOR FEMALE CONNECTOR TYPE A/B 125 PLATED-
THROUGH HOLES AT 2x2mm SQUARE GRID.
- 9 CONNECTOR LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
TECHNICAL REFERENCE TR-NWT-001217 ISSUE 1, SEPT 1992.
- 10 0.76µm MIN. GOLD PLATING AT MATING SURFACES.

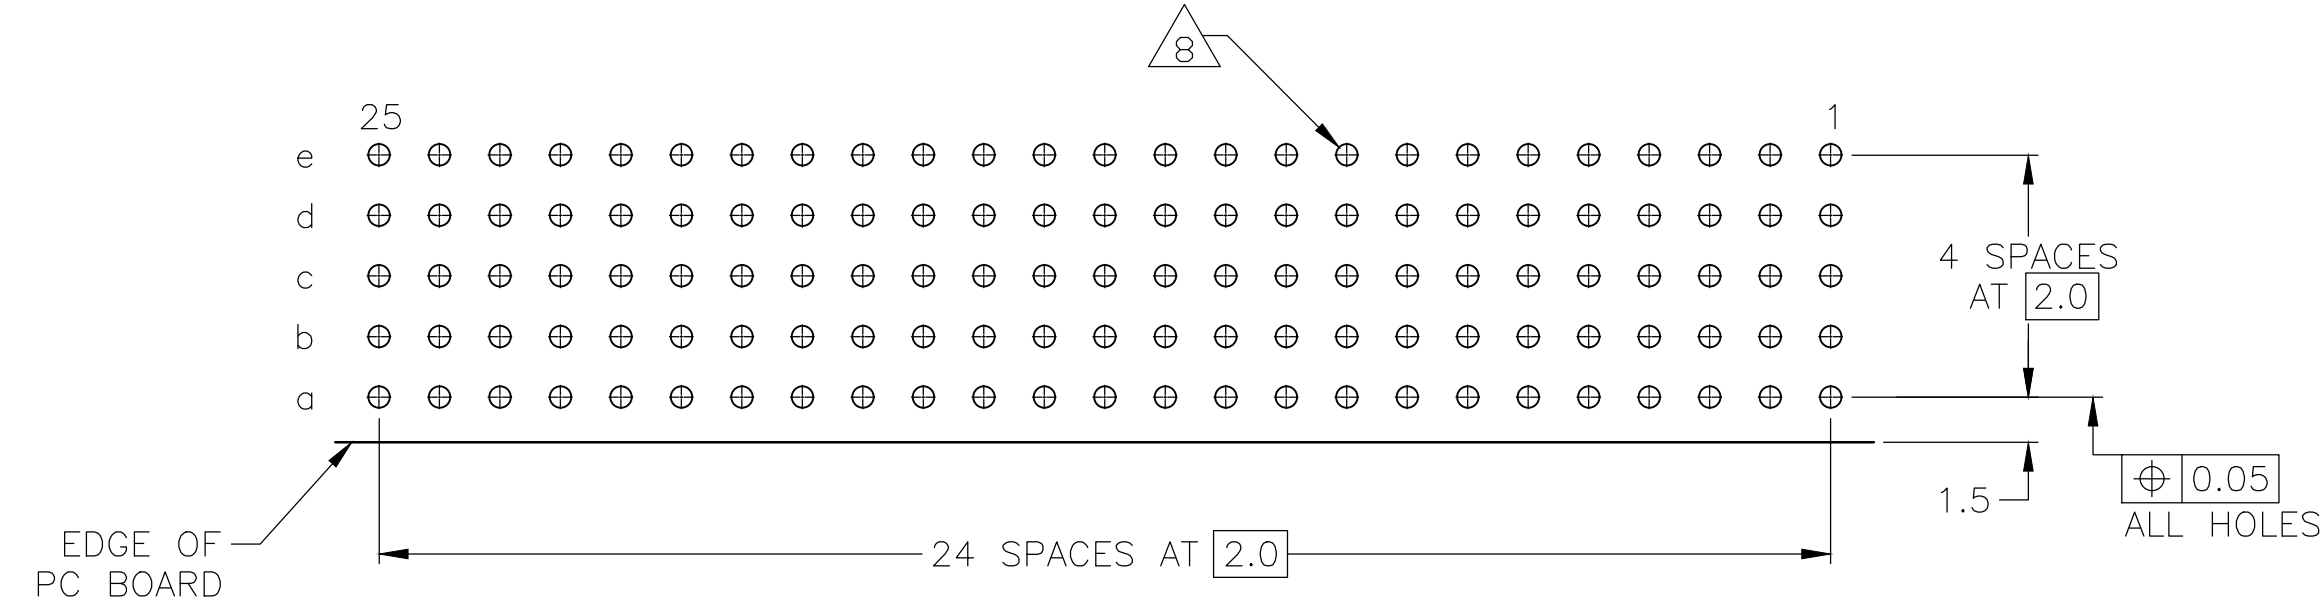

PCB HOLE DIM ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE AS SHOWN)

	2	3	10	3-5646574-0
OBSOLETE	2	5	9	1 5646574-9
OBSOLETE	2	5	9	5646574-9
	2	4		5646574-4
	2	3		5646574-1
FINISH	PART NUMBER			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO 11MAR05	TE Connectivity	
DIMENSIONS: mm		CHK G. SKIPPER 11MAR05	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. SKIPPER 11MAR05	RECEPTACLE ASSEMBLY, Z-PACK Z-PACK 2mm HM, TYPE A/B	
9-PLG ± 1-PLG ± 2-PLG ± 3-PLG ± 4-PLG ± ANGLES		PRODUCT SPEC 108-19082 APPLICATION SPEC 114-19029	SIZE A1	CAGE CODE 00779
MATERIAL 1		WEIGHT 0.000000	DRAWING NO 5646574	RESTRICTED TO -
SEE TABLE		CUSTOMER DRAWING		
		SCALE 4:1	SHEET 1 of 1	REV E