

2 W

DC- 8 GHz


SMC

COAXIAL ATTENUATOR

issue
15. jul. 93

Page
1 / 1

DRAWING

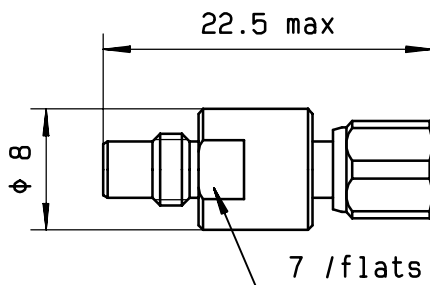

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 8 GHz
 IMPEDANCE : 50 Ohms
 ATTENUATION - NOMINAL : 6 dB

| | | |
|----------------|-------------|-------------|
| FREQUENCY | DC- 4 GHz | 4 - 8 GHz |
| V.S.W.R | <= 1.15 | <= 1.30 |
| DEVIATION (dB) | +0.4 / -0.4 | +0.5 / -0.5 |


TEMPERATURE SENSITIVITY : 4×10^{-4} dB / dB * °C
 PEAK POWER at 25°C (1µs,1%.): : 100 W
 AVERAGE POWER at 25°C : 2 W

MECHANICAL CHARACTERISTICS

CONNECTORS : SMC male/female per MIL-C 39012
 WEIGHT : < 5 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

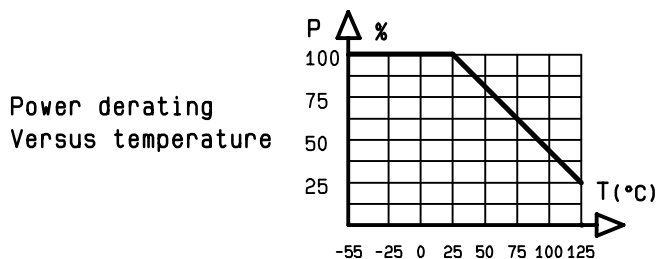

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

4112-9211

| | | | |
|-----------------------|-------------|-----------|------|
| QUALITY Dpt app. | | | |
| CREATION PEN : CAT | | | |
| EP : ----- | | | |
| Nom : KL | 15. jul. 93 | New issue | HS |
| Date: 13. apr. 90 | ISSUE | REVISIONS | NAME |