


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MAX BUNDLE DIAMETER	"L" LENGTH ±.3" [7]
MLTC2H-LP316	2" [51]	7.9" [201]
MLTC2.7H-LP316	2.7" [69]	10.15" [258]
MLTC4H-LP316	4" [102]	14.3" [362]
MLTC6H-LP316	6" [152]	20.5" [521]
MLTC8H-LP316	8" [203]	26.8" [679]
MLTC10H-LP316	10" [254]	33.0" [838]

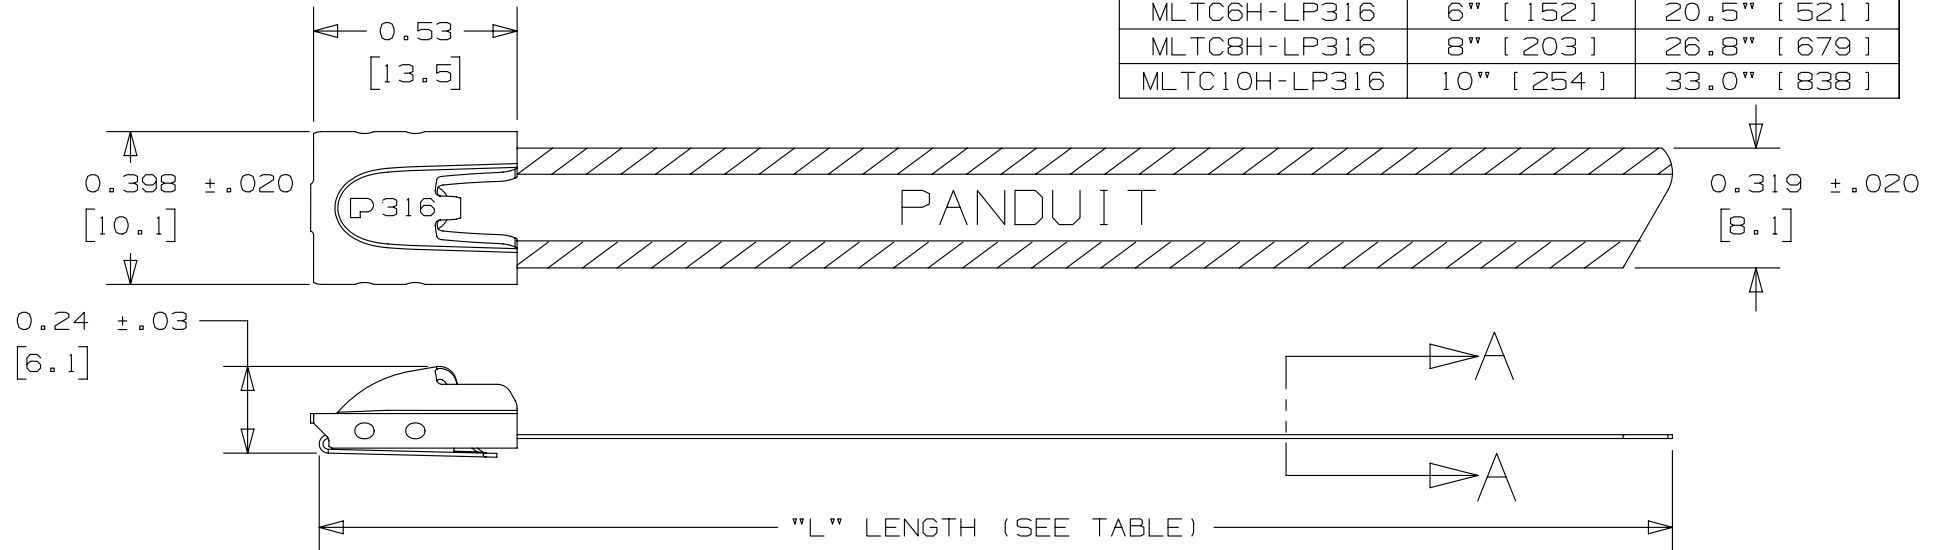

NOTES:

1. APPLICATION TOOLS - GS4MT, PPTMT, HTMT, & ST3MT
2. MINIMUM LOOP TENSILE STRENGTH - 250 lbs. [1112 NEWTONS]
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
 .X = ±.030 [.8] .XX = ±.020 [.5]
 .XXX = ±.010 [.25]
5. MATERIAL: 316 STAINLESS STEEL
6. COATING: NYLON 11
 COATING THICKNESS: .003"/.005" [0.08-0.13] PER SIDE

316 STAINLESS STEEL
 NYLON 11 COATING
 SECTION A - A
 SCALE 4:1

							TITLE SELECTIVELY COATED METAL LOCKING TIE HEAVY SERIES WITH NYLON 11 COATED BODY					
							CUSTOMER DRAWING					
							ITEM REVISION NAME N41140BS/07		PANDUIT			
							DATASET FILE NAME N41140BS_DC/07A					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		MATERIAL: SEE NOTES			
							THIRD ANGLE PROJECTION					
07A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01042			DRAWING NUMBER: N41140BS_DC			
06A	2/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY JAMB	DATE 2/12	CHK DPN	SCALE 2:1	SHT 1 OF 1	SIZE A