

LOC		DIST		REVISIONS				
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			L1	REVISED PER ECR-12-011660	04FEB2013	KH	TM	

1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.




2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.

3. DIMENSIONS IN BRACKETS ARE IN INCHES.



4. CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL: THEN STRIPED WITH 0.0076 [.000030] GOLD IN CONTACT AREA INDICATED AND MATTE TIN LEAD ON SOLDER TAIL END.

5. CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL: THEN STRIPED WITH 0.0076 [.000030] GOLD IN CONTACT AREA INDICATED AND MATTE TIN ON SOLDER TAIL END.

6. SUPERSEDED BY 643426-3

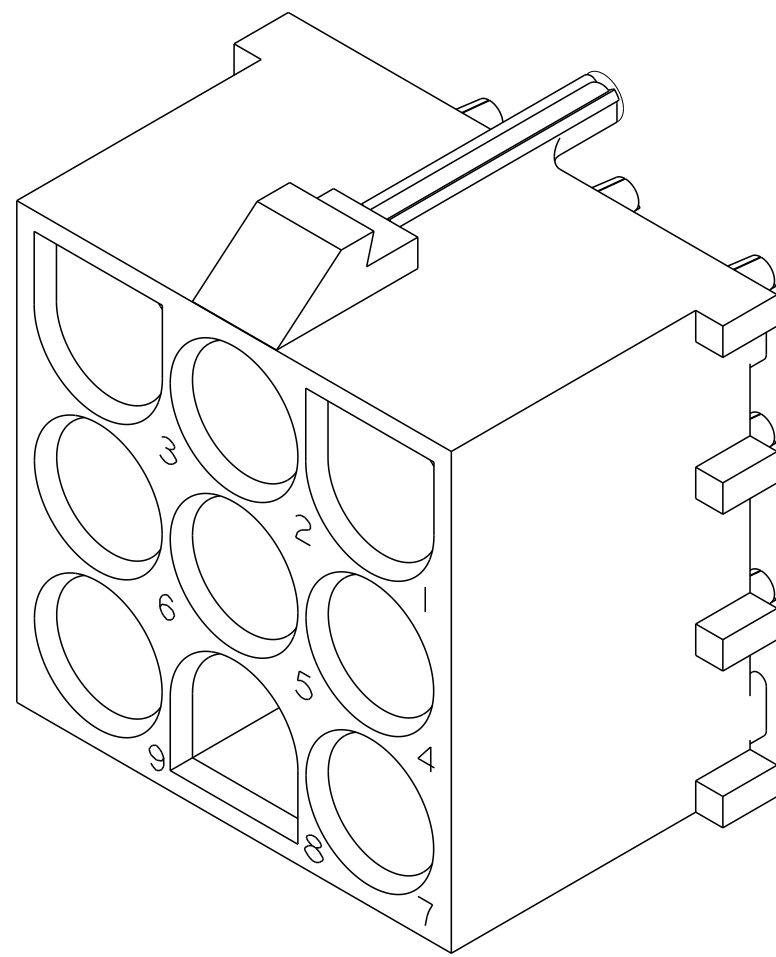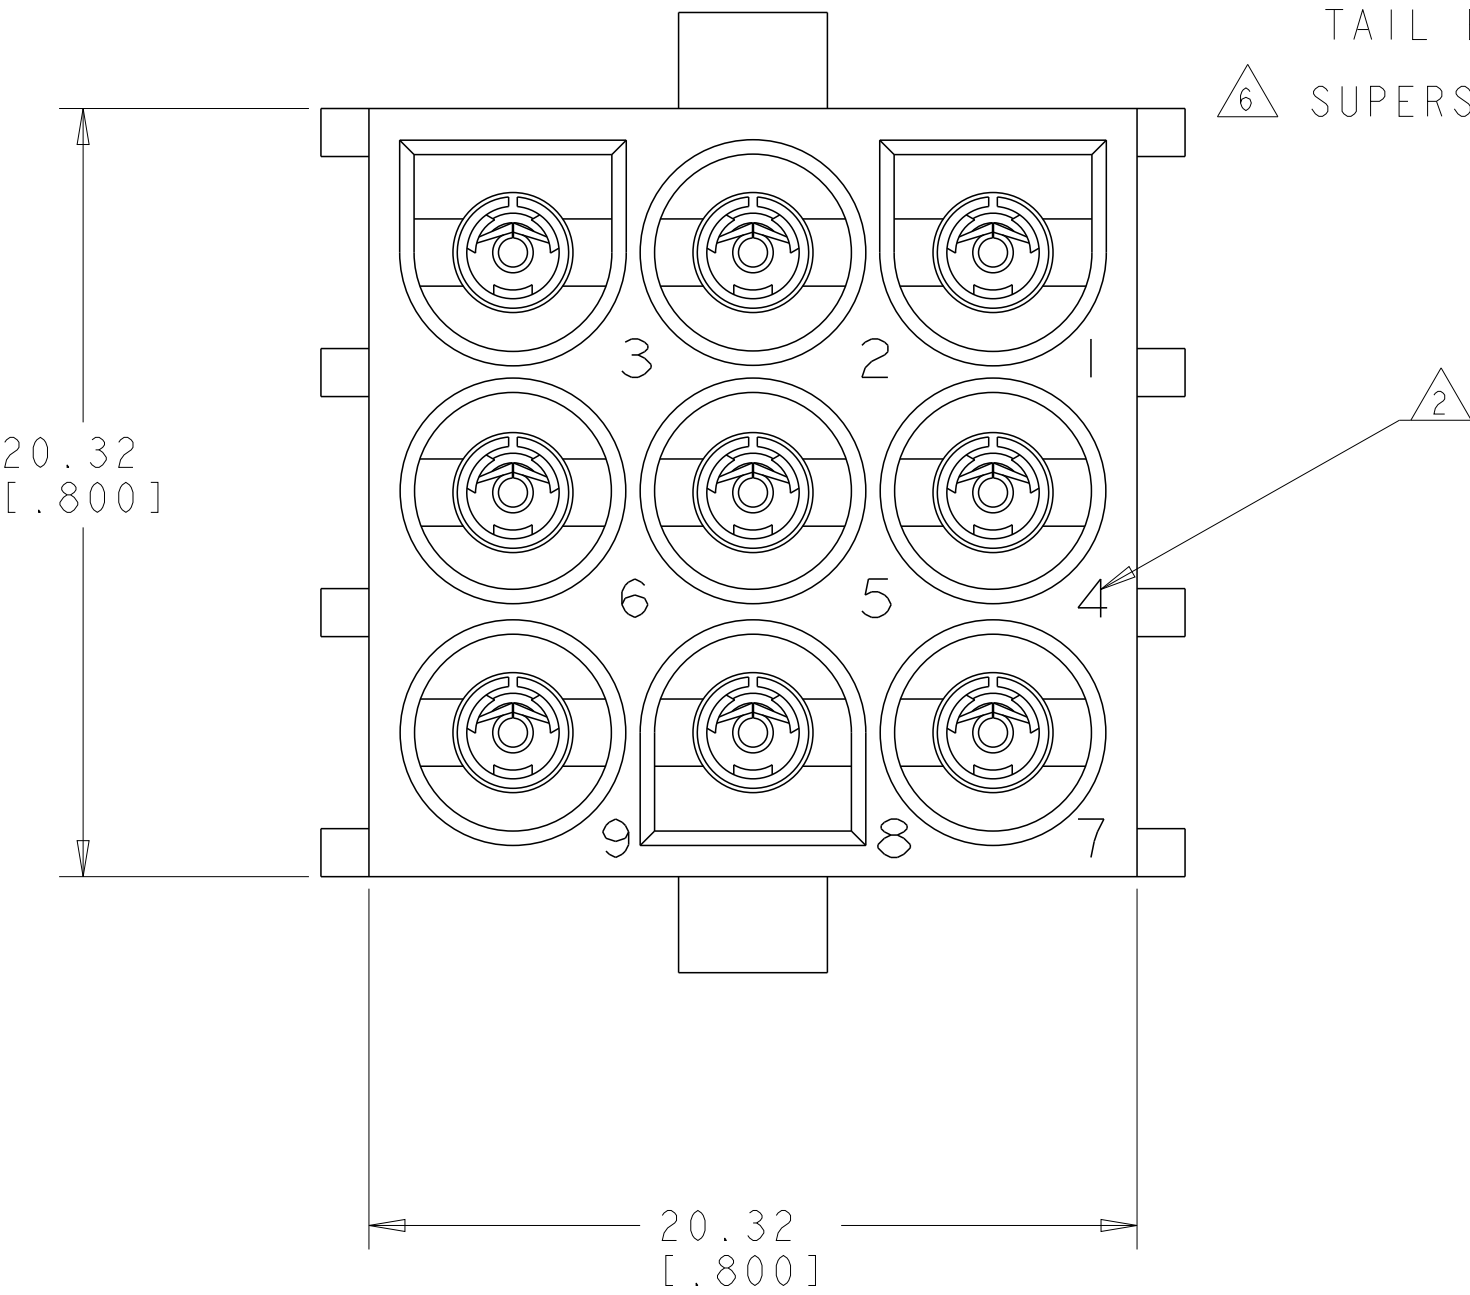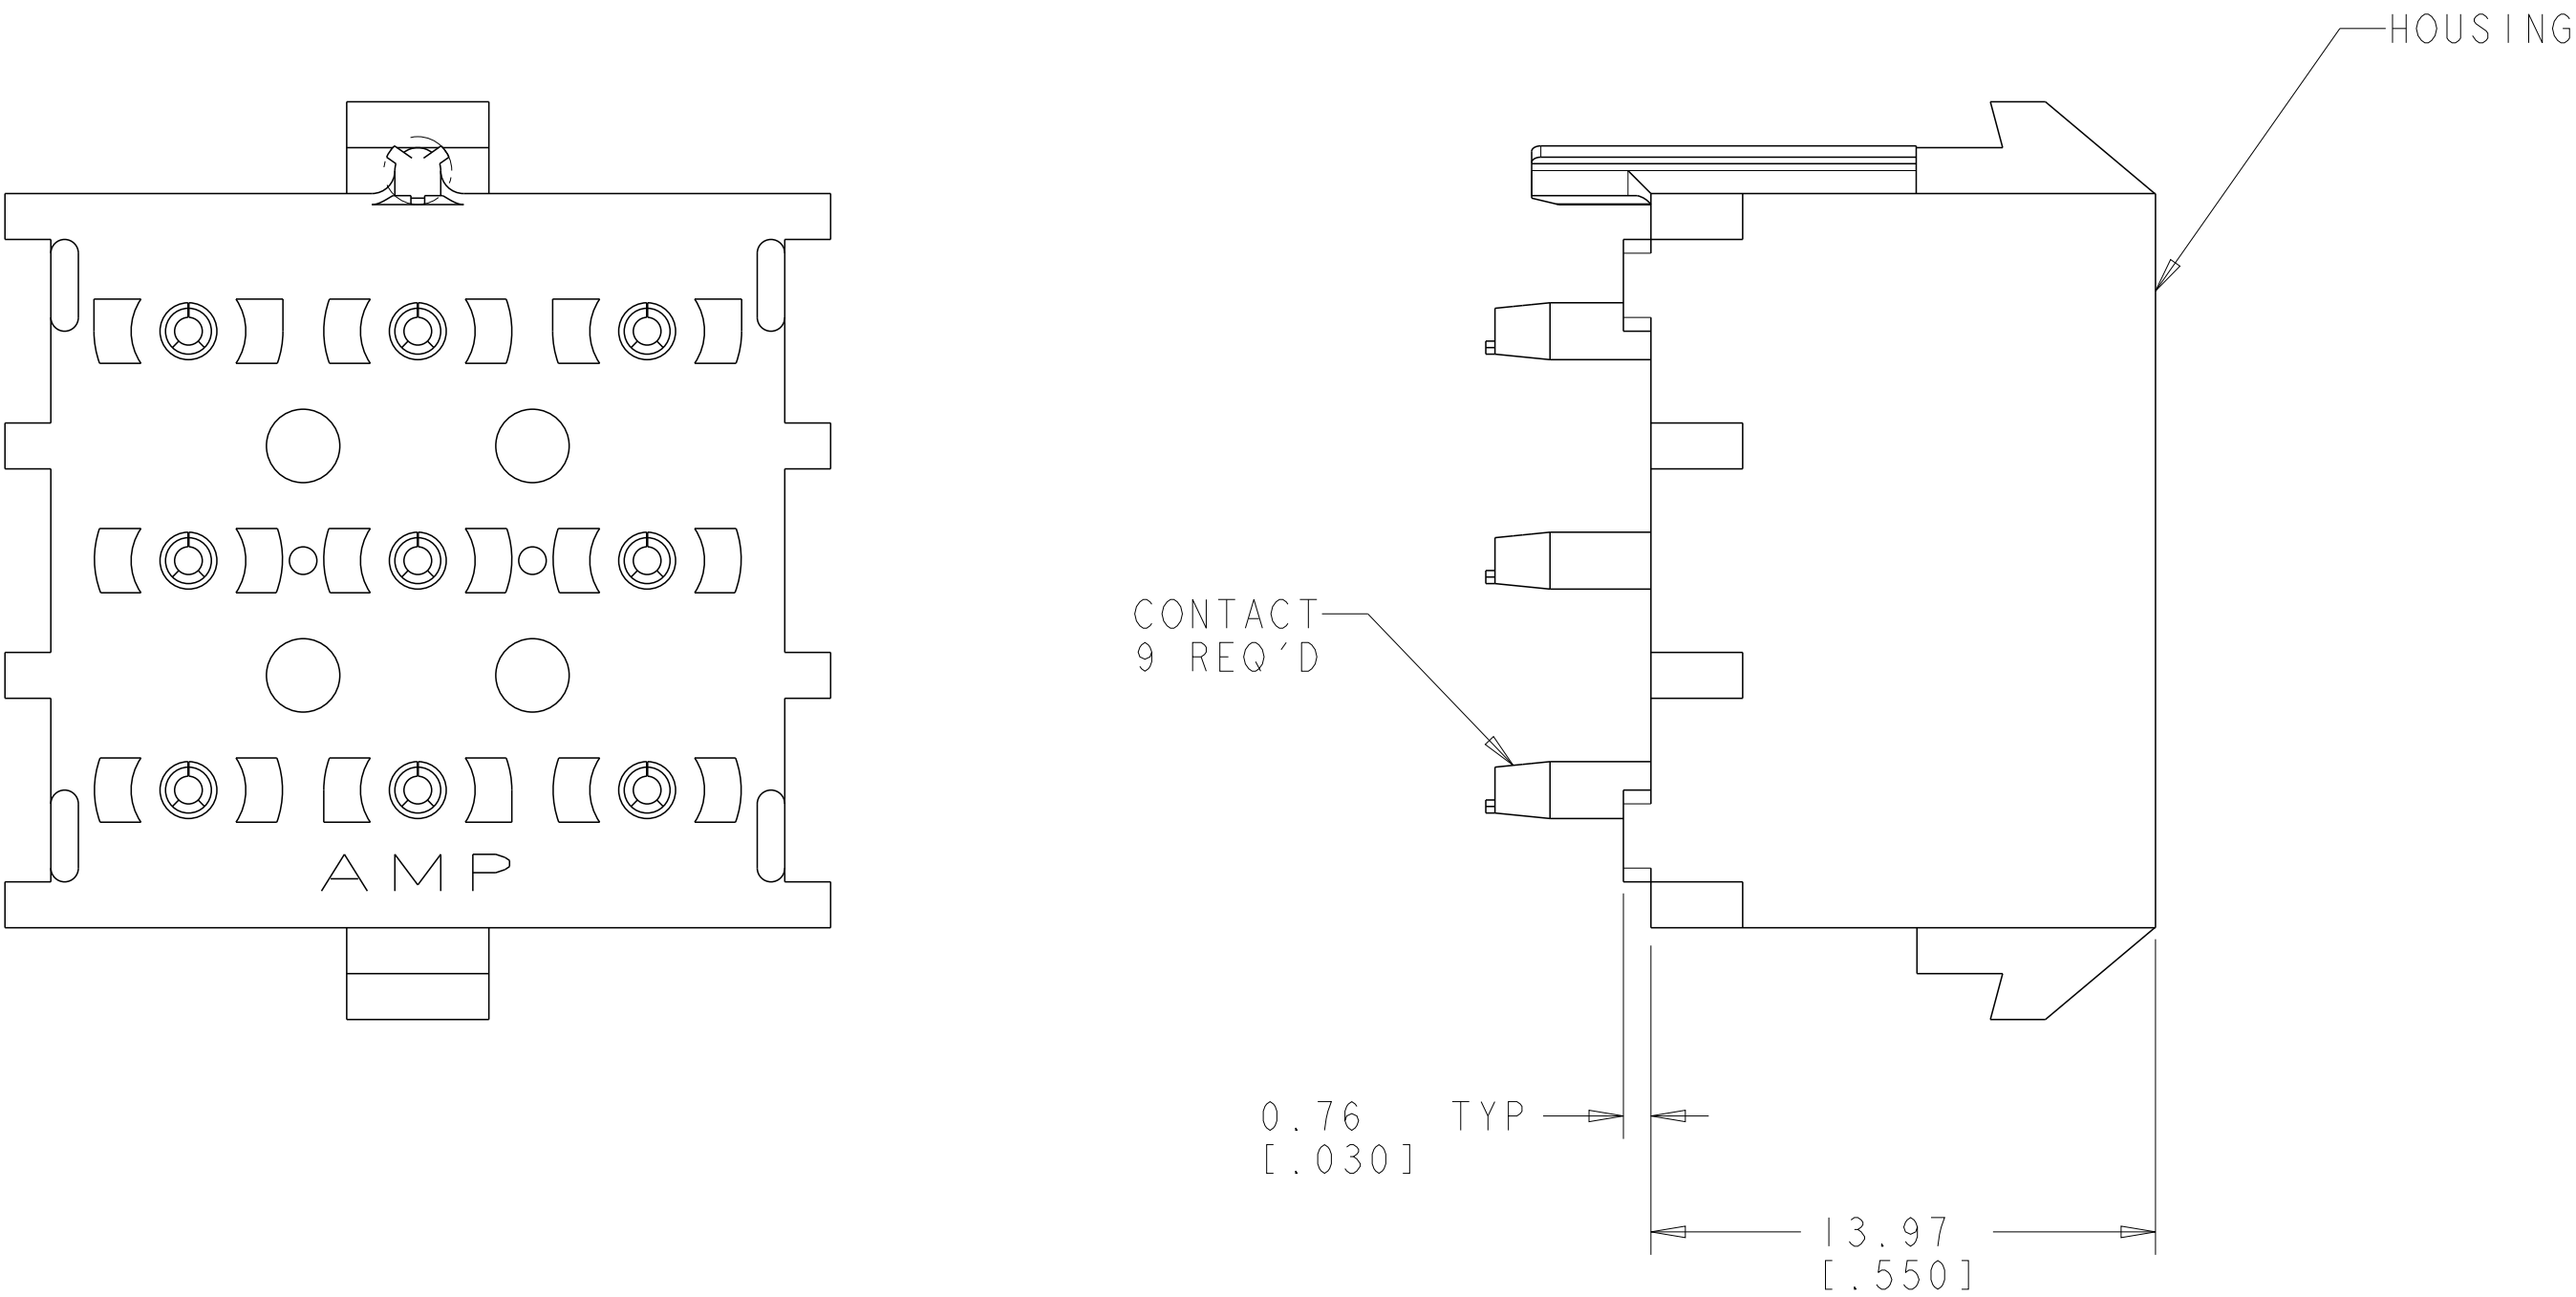

3 DIMENSIONAL MODEL
SCALE 4:1

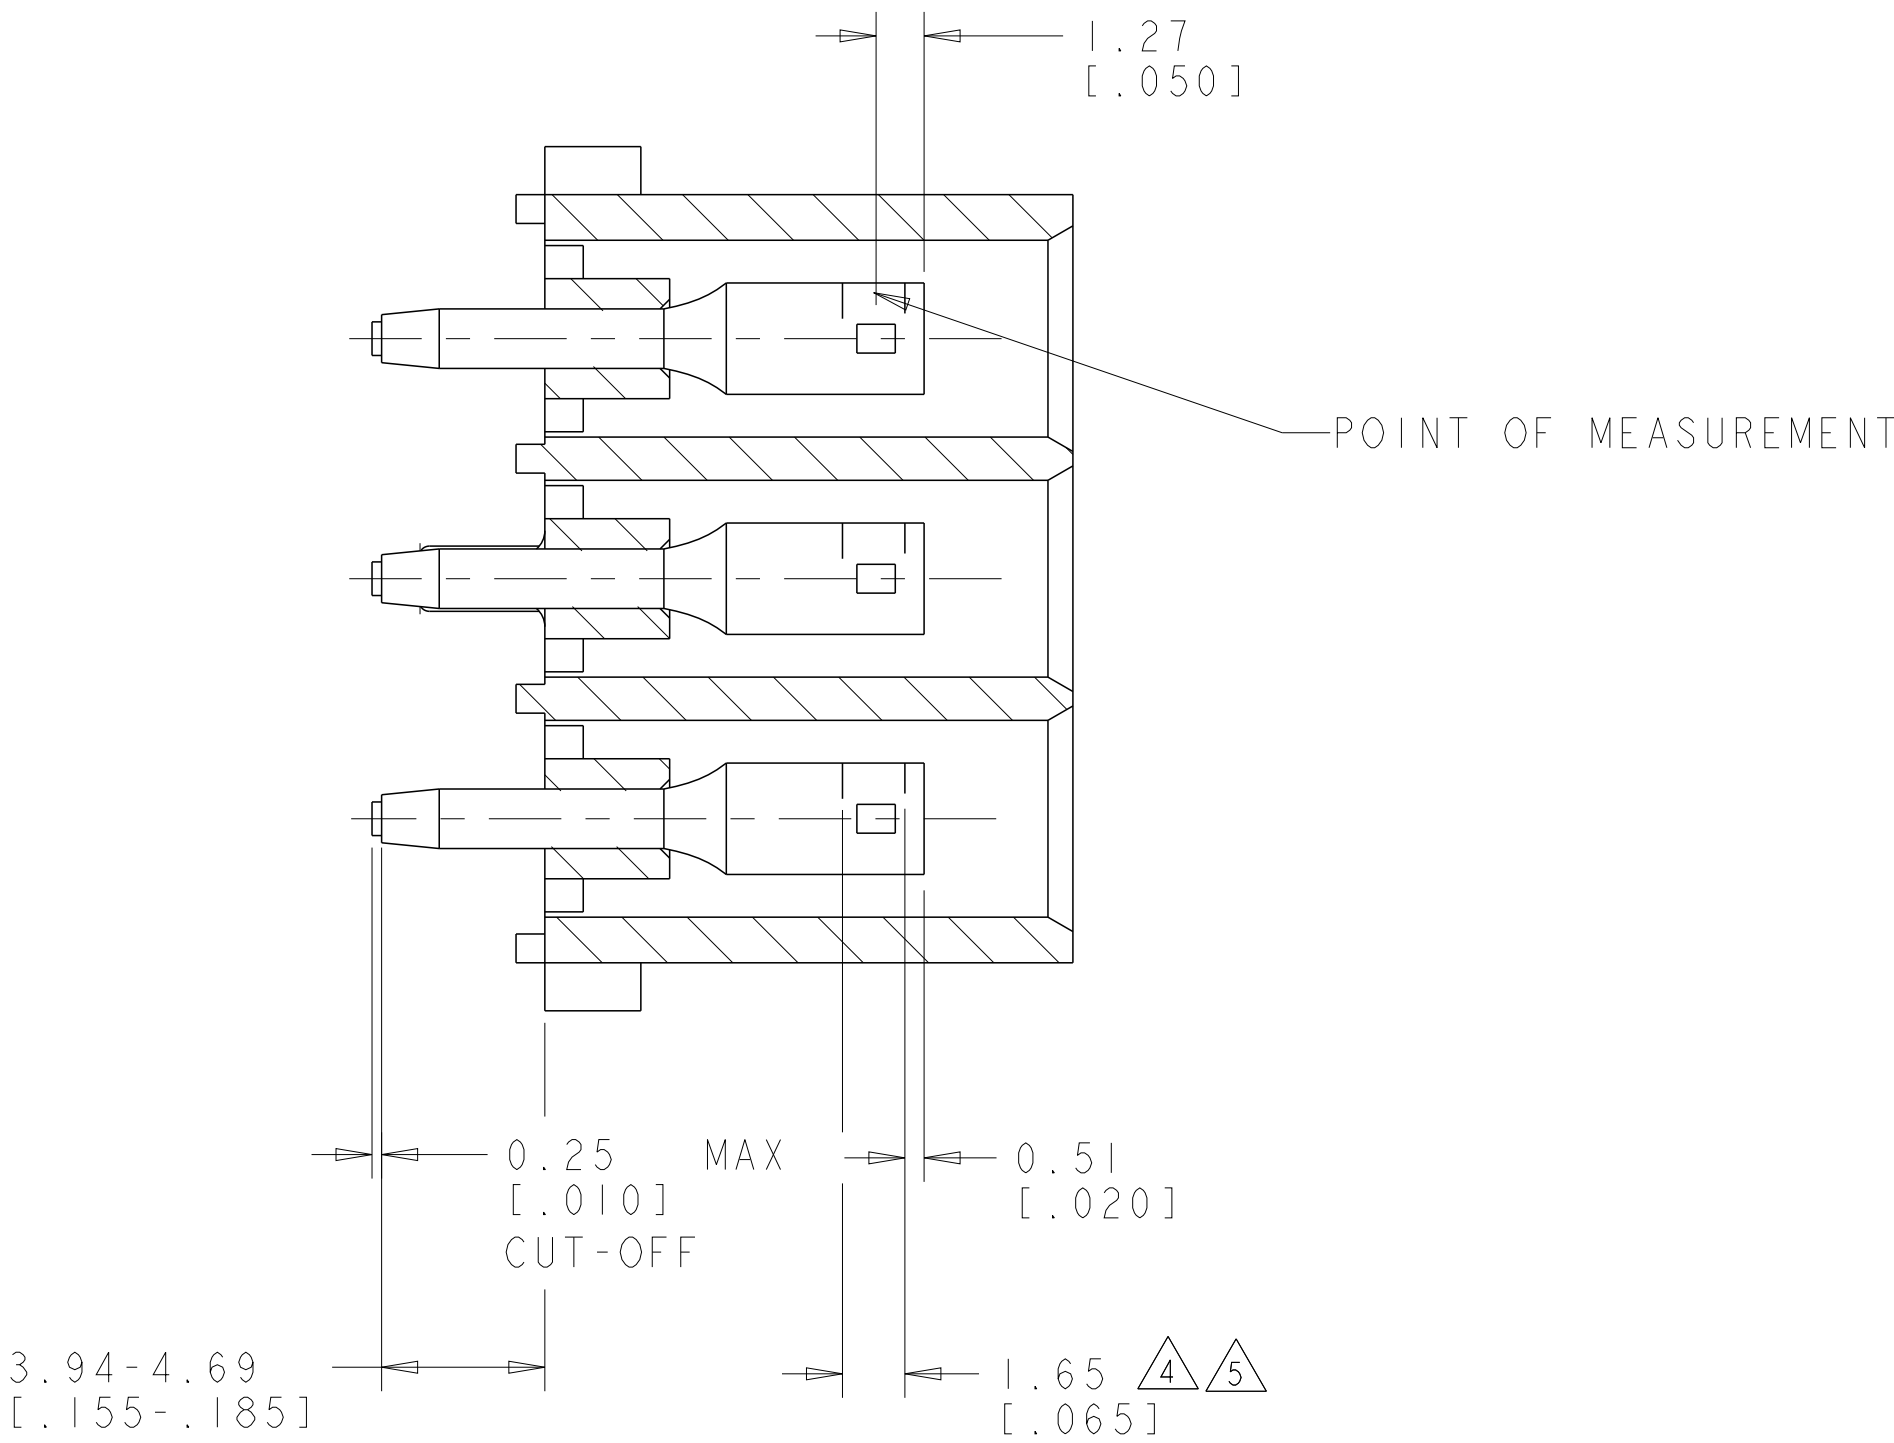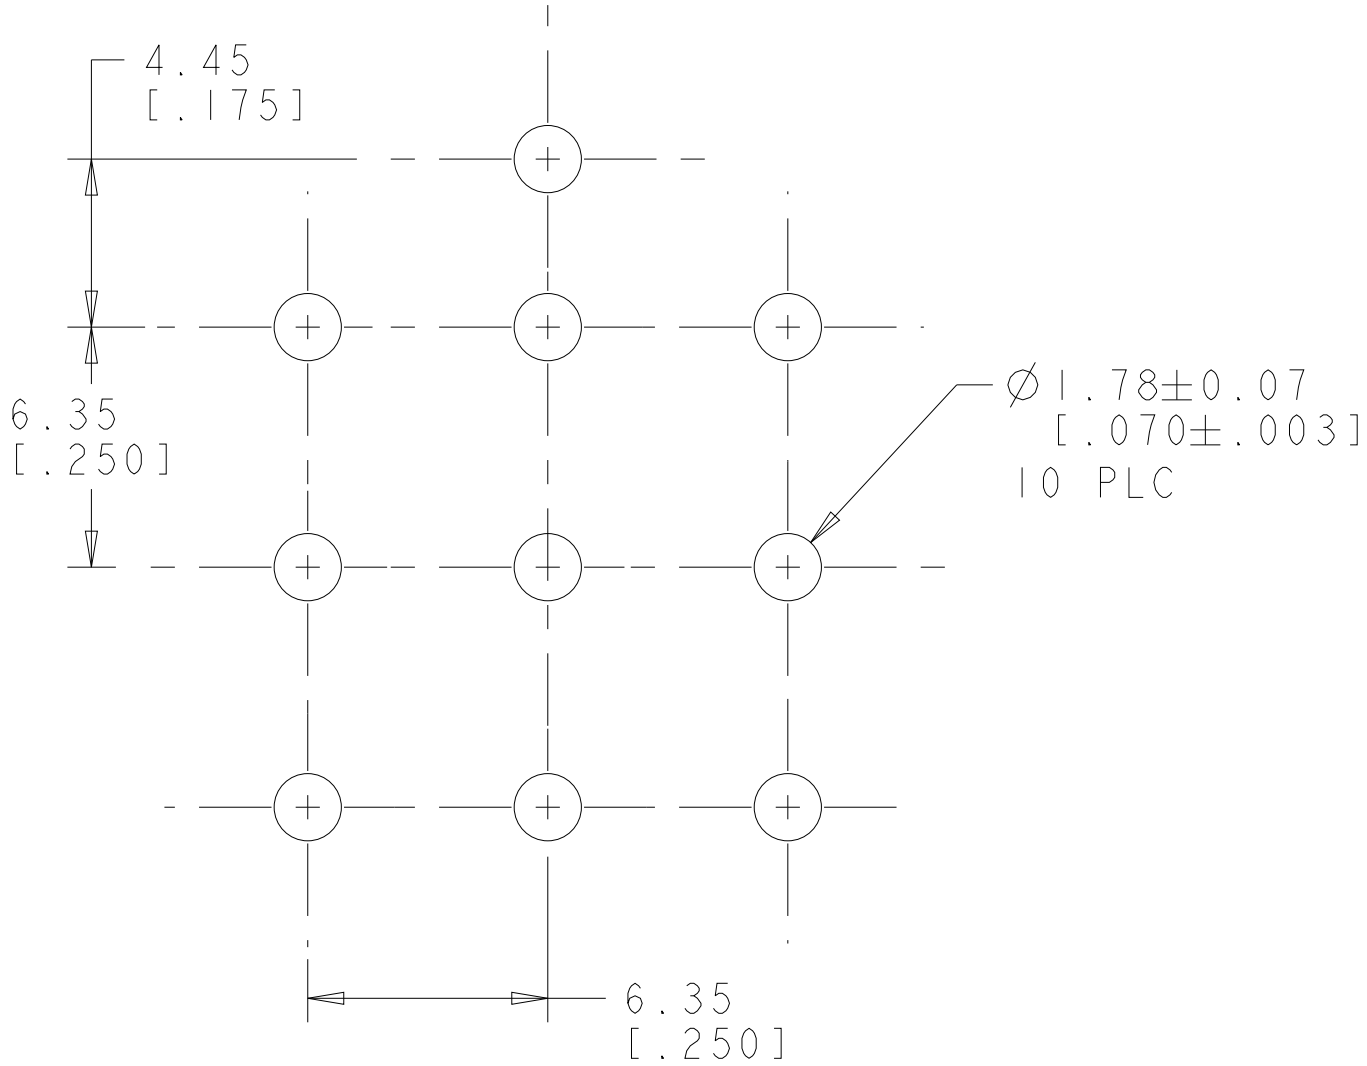

6	PHOSPOR BRONZE, GOLD 5	NYLON, UL94V-0	643426-3
	PHOSPOR BRONZE, GOLD 4	NYLON, UL94V-0	643426-2
	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0	643426-1
	PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 29-JUL-2003	TE Connectivity	
DIMENSIONS:		CHK S. RIDGILL 29-JUL-2003		
mm[INCHES]		APVD S. RIDGILL 29-JUL-2003		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		
0 PLC ±		APPLICATION SPEC	NAME HEADER ASSEMBLY, SOCKET, POLARIZED, 9 CIRCUIT, UNIVERSAL MATE-N-LOK™	
1 PLC ±		WEIGHT -		
2 PLC ±		CUSTOMER DRAWING		
3 PLC ±		SCALE 5:1		
4 PLC ±		SHEET 1 OF 1		
ANGLES ±		REV L1		
FINISH ±				