

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20




ALL RIGHTS RESERVED.

LOC





DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECR-13-009111	04JUN2013	WJ	DH
	AI	ECR-13-013822	02SEP2013	JvH	DH

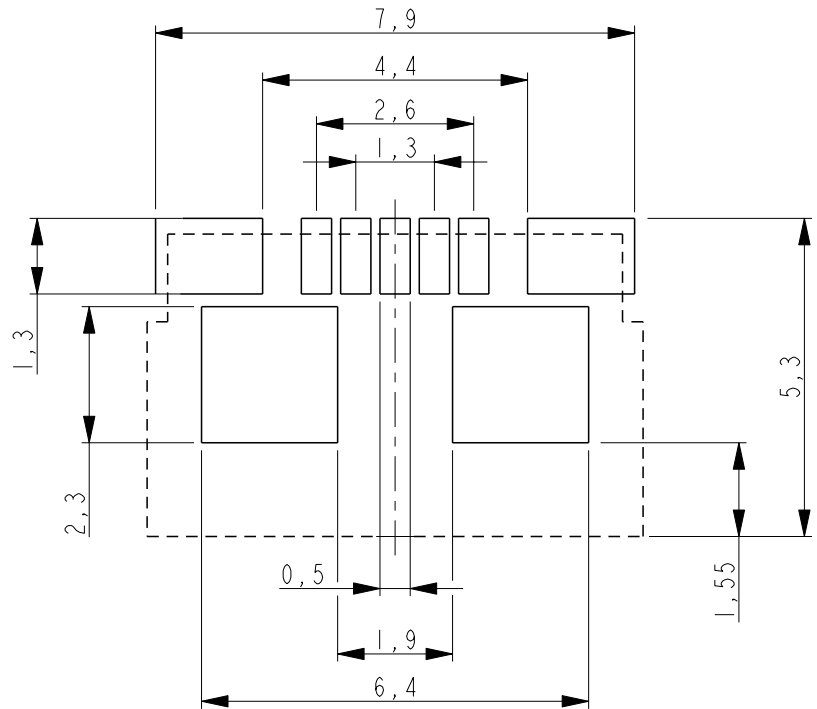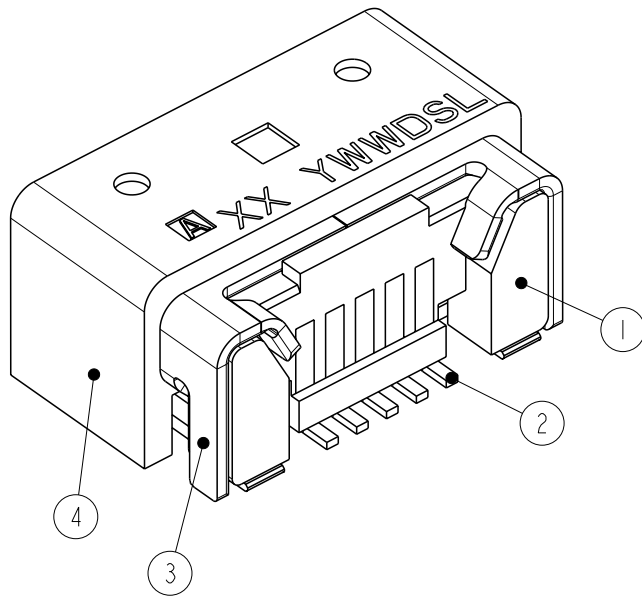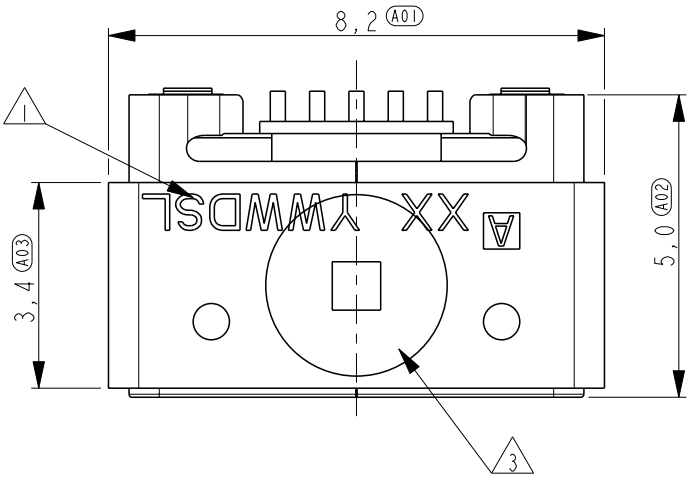

RECOMMENDED PWB LAYOUT (REF)

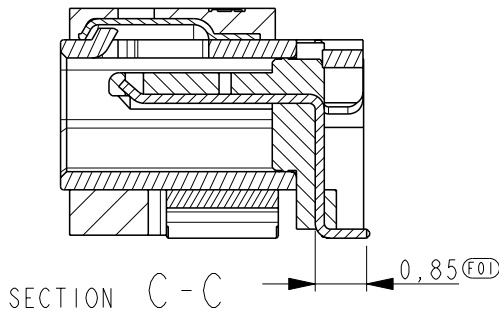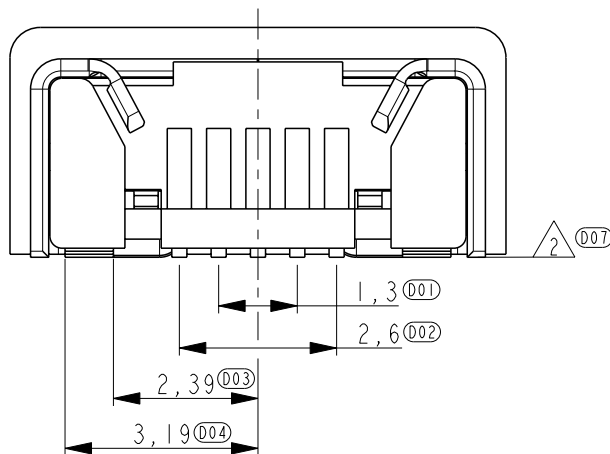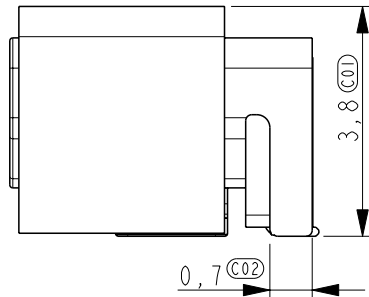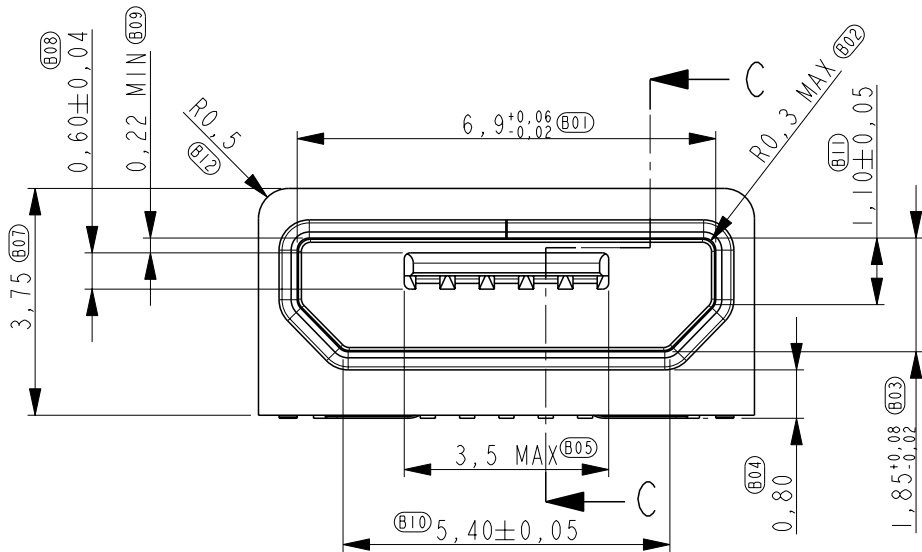

SECTION C-C

TE PN: 2173157-2

TE PN FOR LOW MOQ: 2173157-3

NOTES:

1 VERSION: XX, PRODUCTION DATE: YWWD, SHIFT CODE: S,
PRODUCTION LINE NO: L.

2 COPLANARITY OF 11 SOLDER SURFACES 0,08 MAX.

3 PICK AND PLACE AREA Ø3

4	SLEEVE	LCP	
3	SHELL	STAINLESS STEEL	Tin over Nickel plating
2	CONTACT	COPPER ALLOY	Gold over Nickel plating
1	HOUSING	LCP	
ITEM NO.	DESCRIPTION	MATERIAL	FINISH

DWN	17MAY2011	 TE Connectivity					
W. Jansen							
CHK	17MAY2011	NAME SPLASH-PROOF MICRO USB B-TYPE 0,8 mm OFFSET					
W. Jansen							
APVD	17MAY2011						
D. Halberstadt							
PRODUCT SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO					
108-19460							
APPLICATION SPEC							
-		A300779G-2173157-					
WEIGHT							
0,33							
Customer Drawing		SCALE		SHEET		OF	REV
		8:1		1		3	A1

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±0,2 1 PLC ±0,1 2 PLC ±0,1 3 PLC ±0,025 4 PLC ±0,001 ANGLES ±2°
MATERIAL	FINISH

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR



DESCRIPTION

DATE


DWN

APVD



SEE SHEET 1

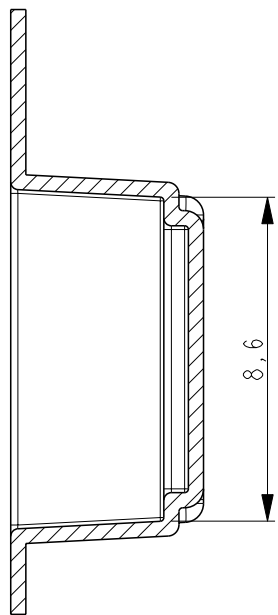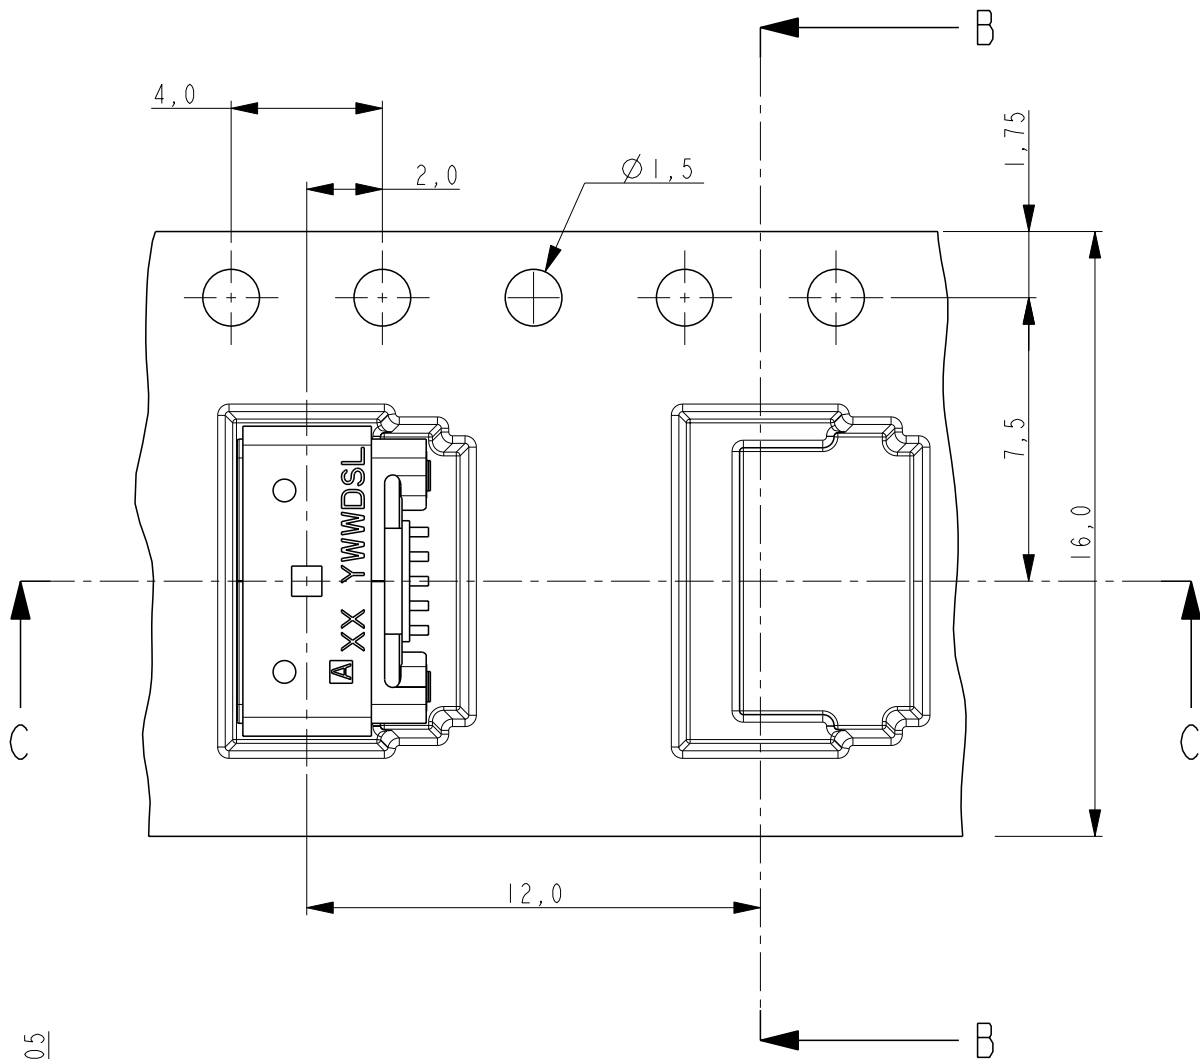

SECTION B - B

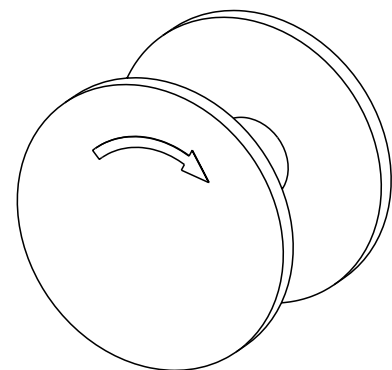


REEL DIA 330

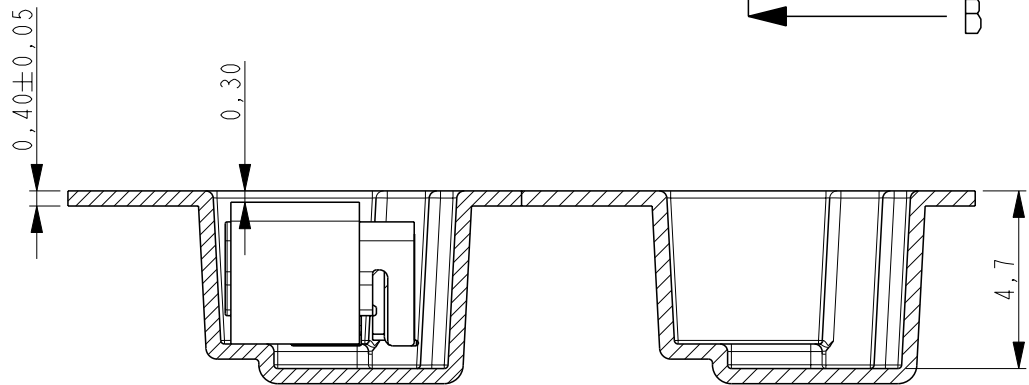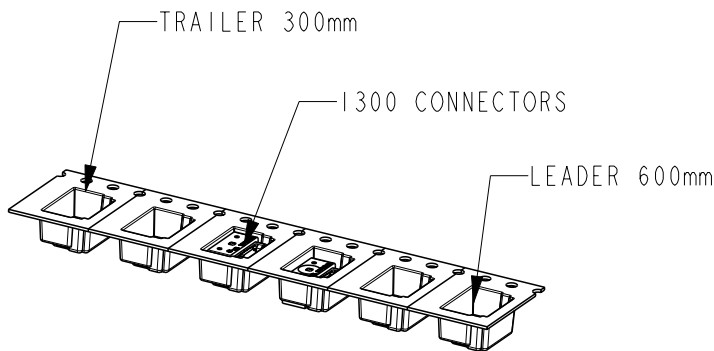

SECTION C - C

NOTES:
COVER, EMOSS TAPE AND REEL ACCODING EIA STANDARD 481-D

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN W. Jansen 17MAY2011		TE Connectivity			
		CHK W. Jansen 17MAY2011					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SPLASH-PROOF MICRO USB B-TYPE 0,8 mm OFFSET			
		0 PLC ±0,2 1 PLC ±0,1 2 PLC ±0,1 3 PLC ±0,025 4 PLC ±0,001 ANGLES ±2°					
MATERIAL -		FINISH -		SIZE A3	CAGE CODE 00779	DRAWING NO C-2173157	RESTRICTED TO -
Customer Drawing				SCALE 8:1	SHEET 2	OF 3	REV A1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION


DATE

DWN


APVD

SEE SHEET 1

SEE DETAIL B

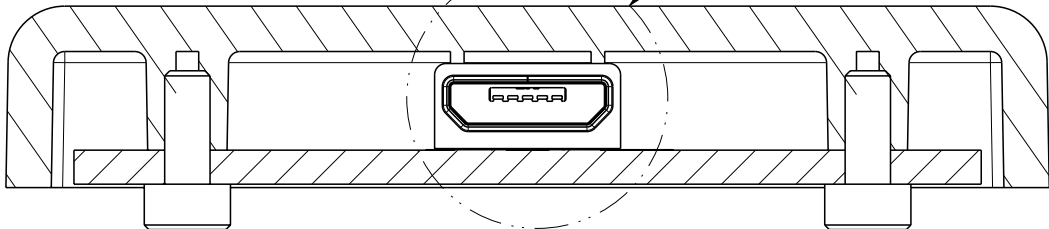


SECTION D-D

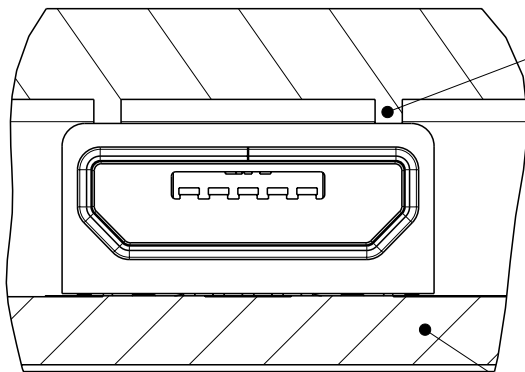

COVER RIB


PWB

DETAIL B
SCALE 6:1

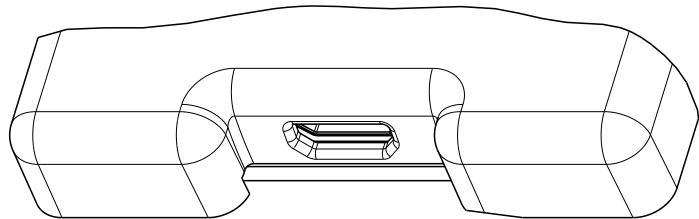


SCALE 2:1

SEE DETAIL A

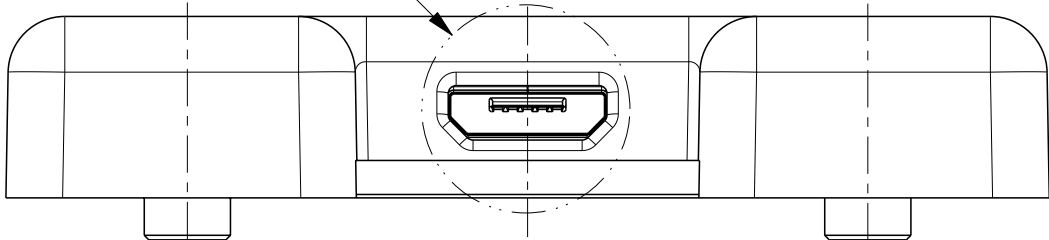

0,3±0,2

3,75±0,05
HEIGHT FROM PWB TO
RIB COVER

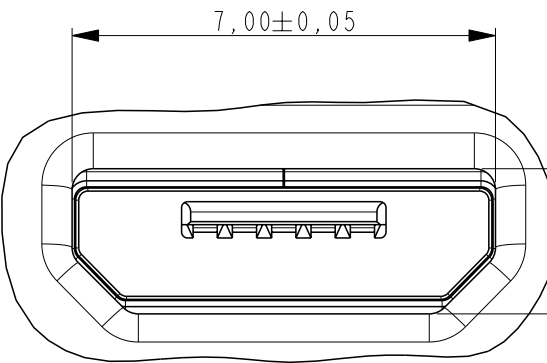


RECOMMENDED COVER HOLE SHAPE (REF)

DETAIL A
SCALE 8:1

3,1 REF

SECTION A-A

RECOMMENDED PWB AND COVER ASSEMBLY (REF)

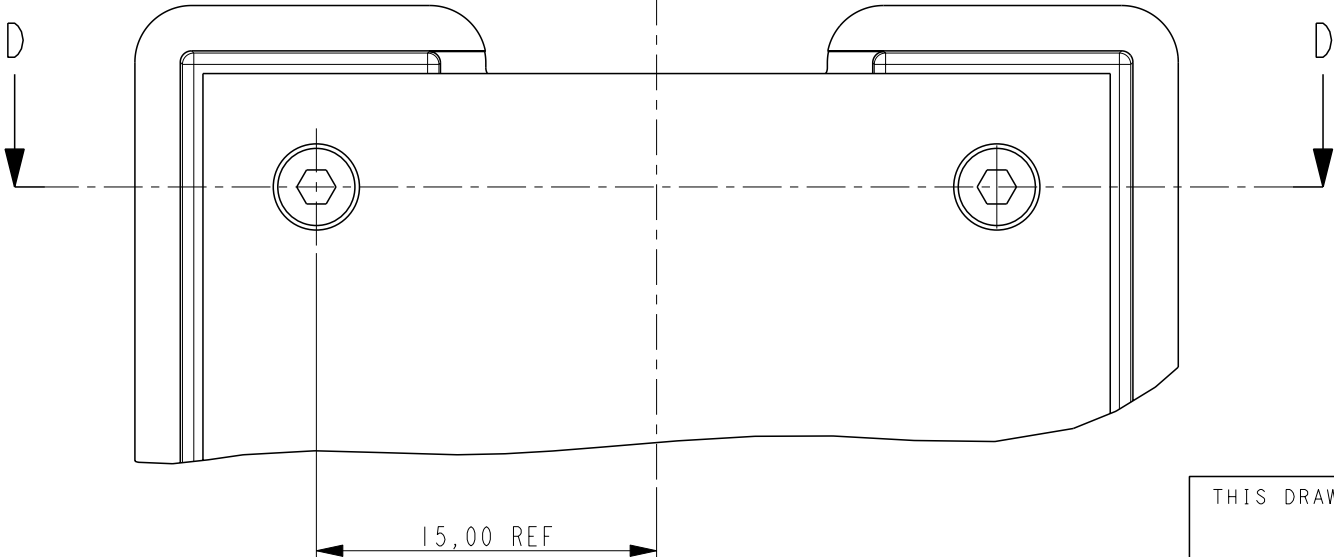

15,00 REF

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 17MAY2011

CHK W. Jansen 17MAY2011

APVD W. Jansen 17MAY2011

PRODUCT SPEC

108-19460

APPLICATION SPEC

WEIGHT 0,33

Customer Drawing



TE Connectivity

SPLASH-PROOF MICRO USB
B-TYPE
0,8 mm OFFSET

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-2173157


SCALE 8:1

SHEET 3 OF 3

REV A1

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±0,2
1 PLC ±0,1
2 PLC ±0,1
3 PLC ±0,025
4 PLC ±0,001
ANGLES ±2°

MATERIAL

-

FINISH

-