


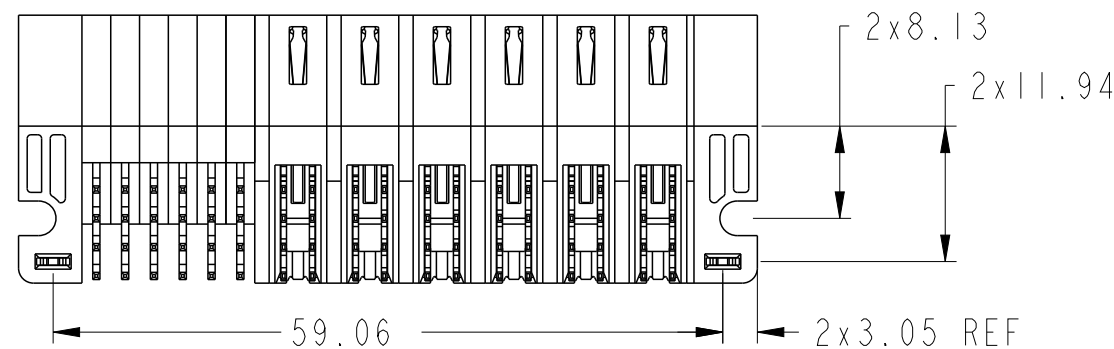


PRODUCT NUMBER SEE SHEET 2

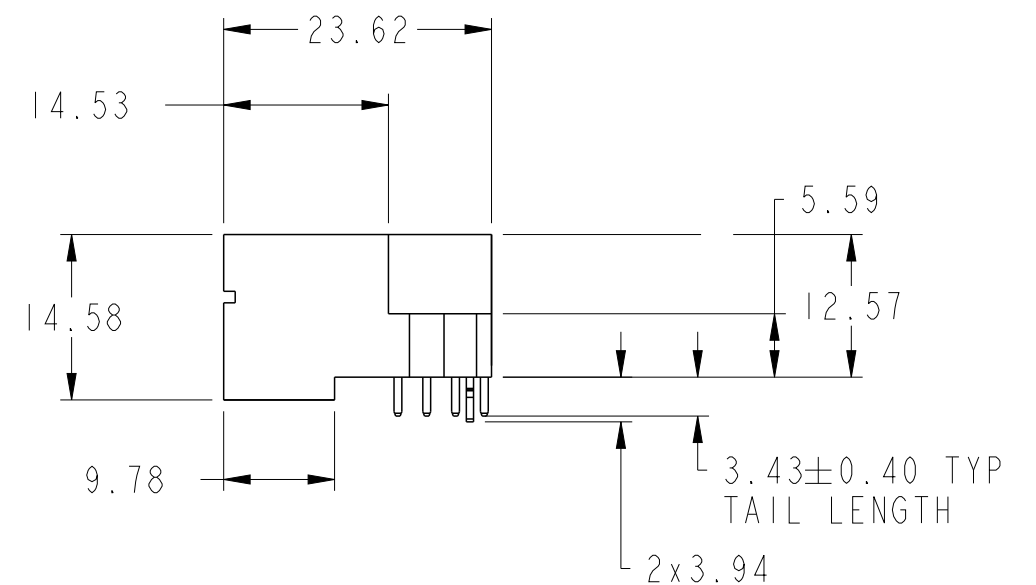

spec ref	*	dr	Vicking Liu	2015/10/13	projection	MM	size	A3	scale	3:2
tolerance std	ASME Y14.5	eng	Vicking Liu	2015/11/22	chr	Fancy Zhang	2015/11/22	ecn no	-	
surface	✓	appr	Pei-Ming Zheng	2015/11/22	product family	PwrBlade+	rel level	Released		
linear	0.X	±0.5	0.XX	±0.25	0.XXX	±0.10	angular	0°	±2°	
ASME Y14.5										
www.fci.com	cat. no.	24S + 6HP	RA STB HEADER	10106124-6006009	rev	A				
Product - Customer Drw	sheet 1 of 3									

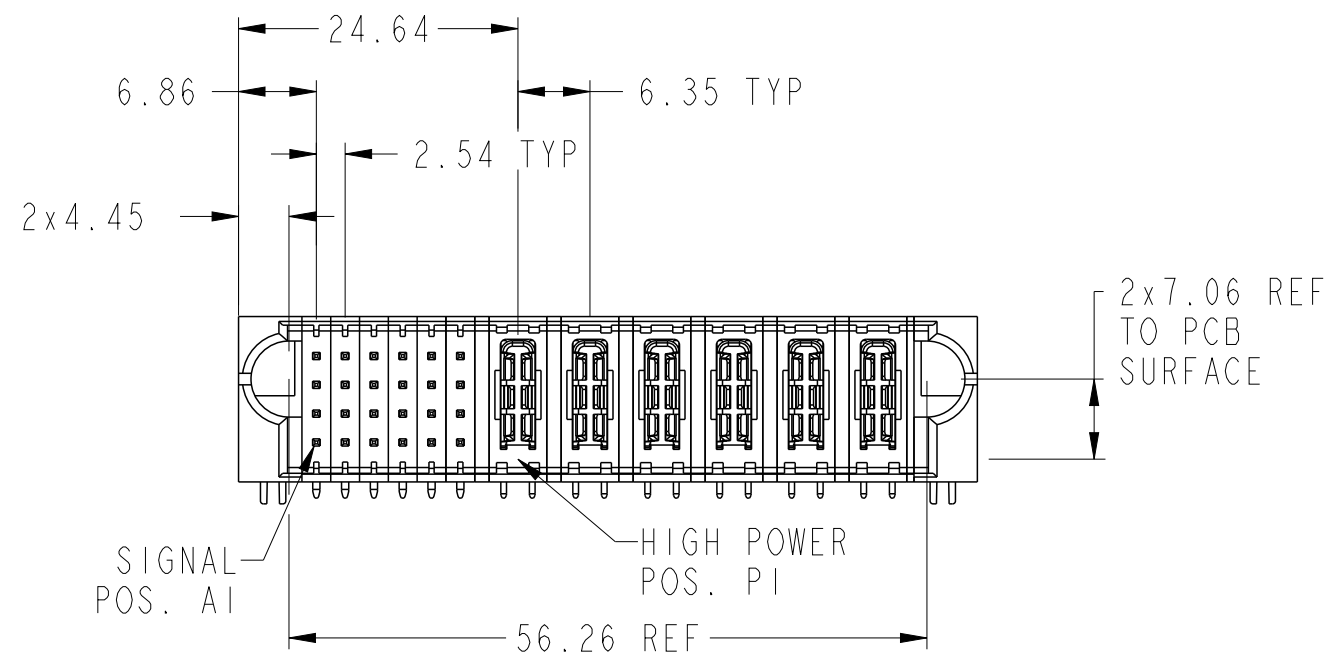


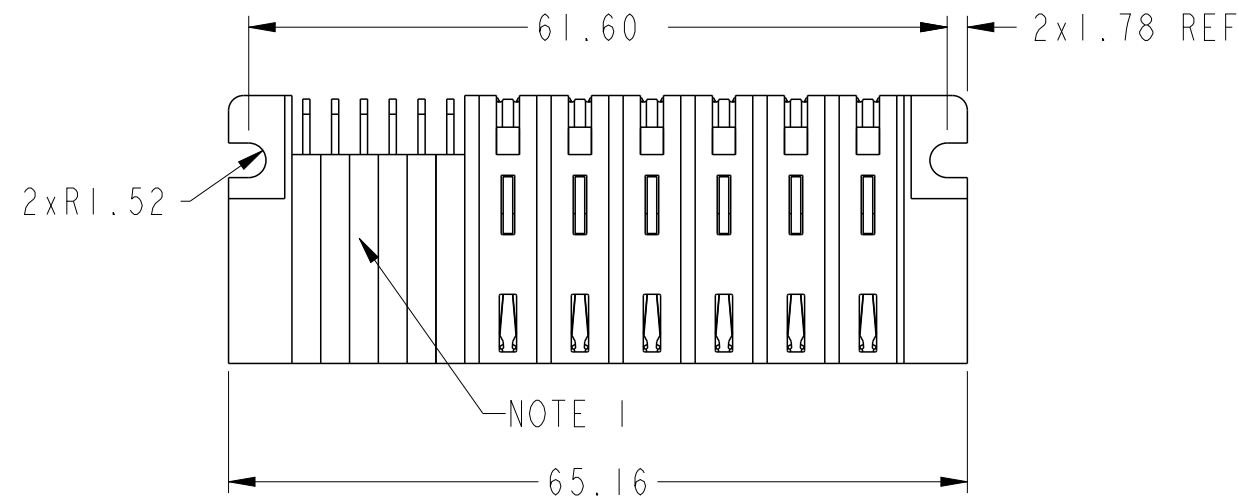







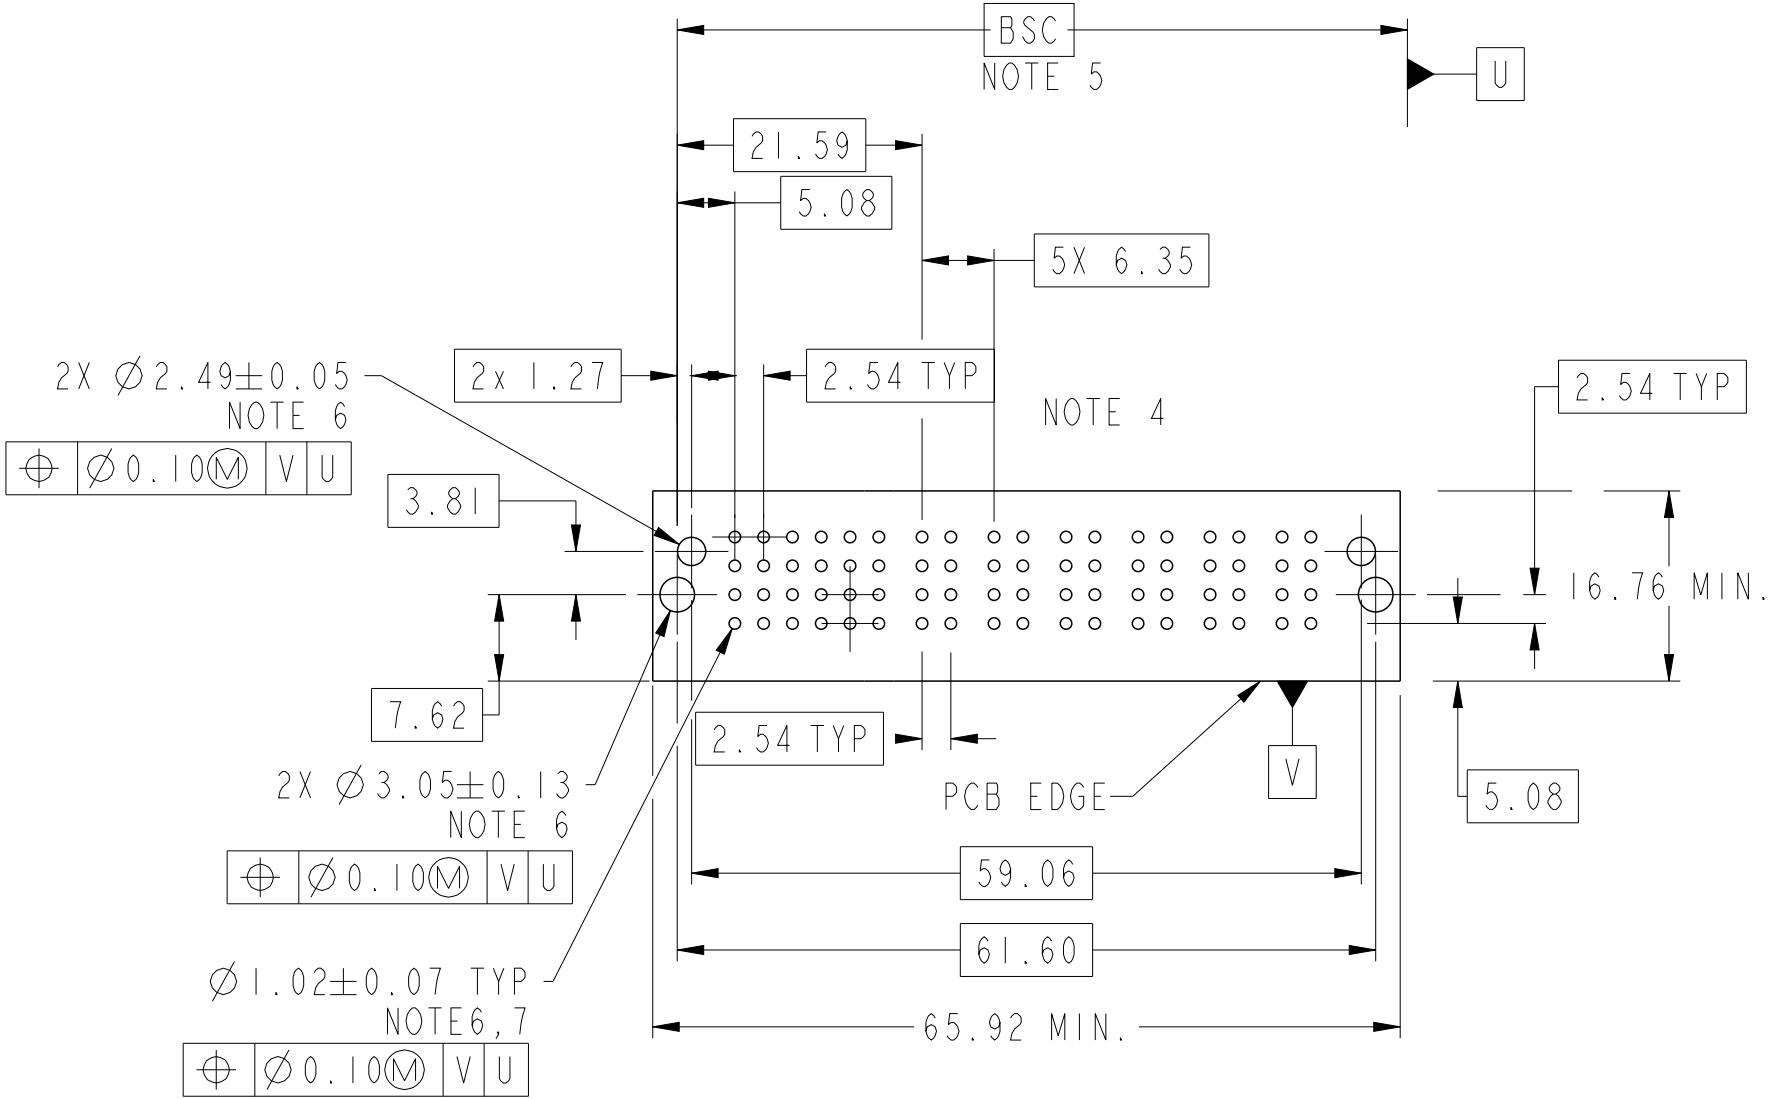

Copyright FCI.

CODE	DESCRIPTION
E	MLBF SIGNAL CONTACT, ROW A (3.43)
F	MLBF SIGNAL CONTACT, ROW B (3.43)
G	MLBF SIGNAL CONTACT, ROW C (3.43)
H1	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
U	STD SIGNAL CONTACT, ROW D (3.43)

dr	Vicking Liu	2015/10/13	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2				
eng	Vicking Liu	2015/11/22			ecn no				-			
chr	Fancy Zhang	2015/11/22										
appr	Pei-Ming Zheng	2015/11/22	product family			PwrBlade+	rel level		Released			
<div>www.fci.com</div>			cat. no.			Product - Customer Drw			sheet 2 of 3			
<div>FCi</div>			title			24S + 6HP			dwg no	10106124-6006009	rev	A
			RA STB HEADER									

CODE	DESCRIPTION
E	MLBF SIGNAL CONTACT, ROW A (3.43)
F	MLBF SIGNAL CONTACT, ROW B (3.43)
G	MLBF SIGNAL CONTACT, ROW C (3.43)
H1	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
U	STD SIGNAL CONTACT, ROW D (3.43)



PRODUCT NO.	ROWS	SIGNAL						HIGH POWER							
		E1	1	2	3	4	5	6	P1	P2	P3	P4	P5	P6	E2
10106124-6006009LF	D C B A		U	U	U	U	U	U	H1	H1	H1	H1	H1	H1	
			G	G	G	G	G	G							
			F	F	F	F	F	F							
			E	E	E	E	E	E							
															

A

B

C

D

A

B

C

D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.  
-SIGNAL CONTACT - COPPER ALLOY.  
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION: 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION: GS-12-658.  
APPLICATION SPECIFICATION: GS-20-141.  
PRODUCT PACKAGED IN TRAYS: GS-14-1502.



Copyright FCI.

dr	Vicking Liu	2015/10/13	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2		
eng	Vicking Liu	2015/11/22			ecn no					
chr	Fancy Zhang	2015/11/22			rel level				Released	
appr	Pei-Ming Zheng	2015/11/22	product family						PwrBlade+	
<div>www.fci.com</div>		cat. no.			Product - Customer Drw			sheet 3 of 3		