

DESCRIPTION: M12 MALE - PANEL MOUNT (REAR) - RIGHT ANGLE - 3 POS.

NOTE:

MATERIAL

HOUSING:	PBT UL94V-0, BLACK
CONTACT:	BRASS
NUT:	BRASS
O-RING:	NBR, BLACK
BACK HOUSING:	PBT UL94V-0, BLACK
DOWN HOUSING:	PBT UL94V-0, BLACK


FINISH

CONTACT:	GOLD 10µ" MIN. OVER 50µ" NICKEL
----------	------------------------------------


SHELL:

ELECTRICAL




RATED CURRENT:	5A
RATED VOLTAGE:	125V
WATER PROOF:	IP67
ENVIRONMENT OPERATION TEMPERATURE:	-40°C TO +85°C

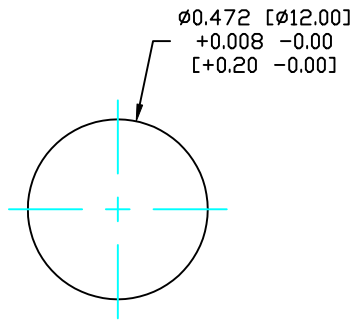

PANEL CUTOUT

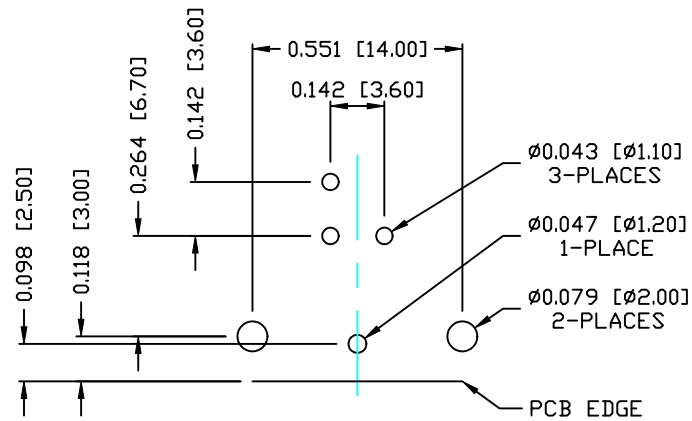

PCB LAYOUT

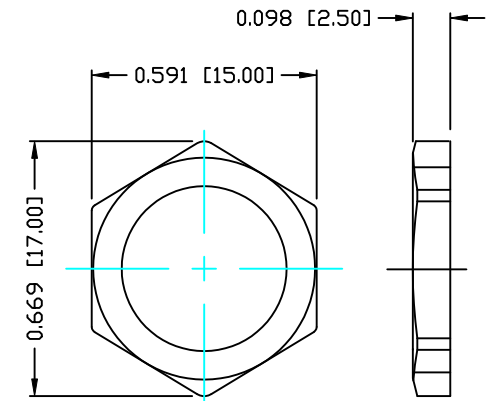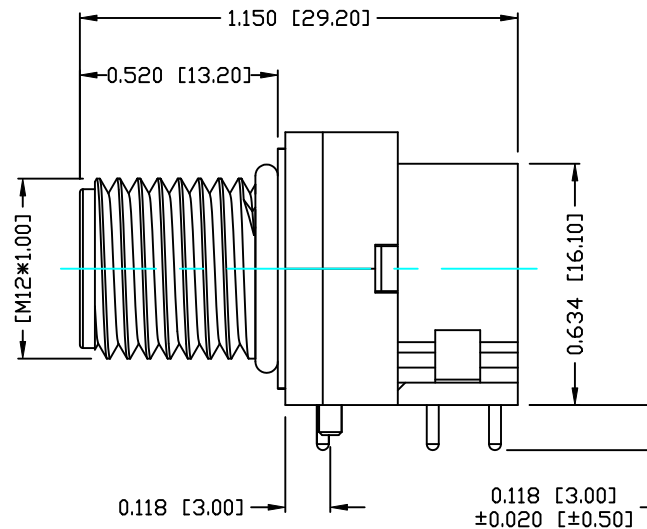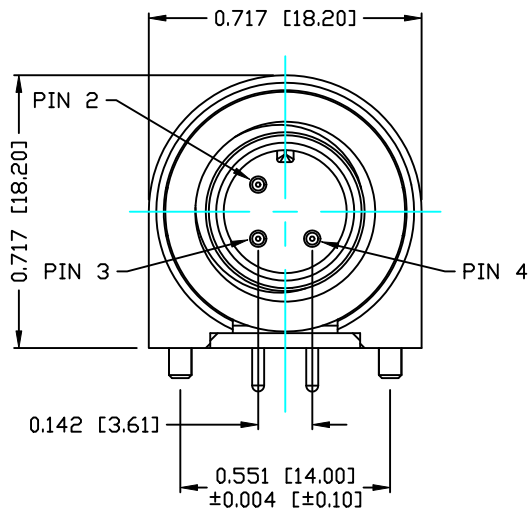

NUT

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

M. SIGMON

DATE:

01-27-15

CHECKED:

DATE:

NorComp

SCALE:

N.T.S.

SHEET

OF

1

1

REV

0

DWG NO.

861-003-113R004