



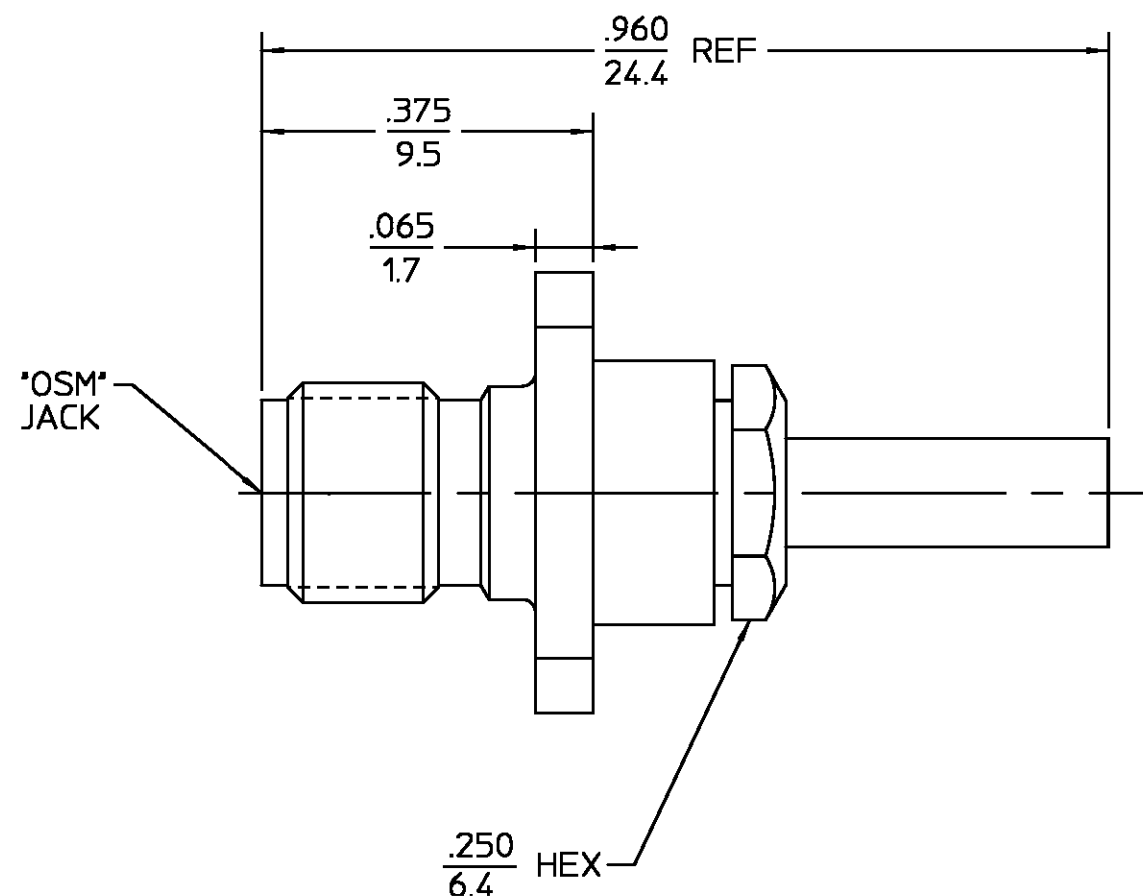

DESIGNED FOR USE WITH RG-178/U	
CABLE ENTRY DIAMETER MINIMUM	
INNER SLEEVE	.036
DIELECTRIC	.023
CONTACT	.021

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₀	RELEASED	11/26/96	<i>RAC</i>

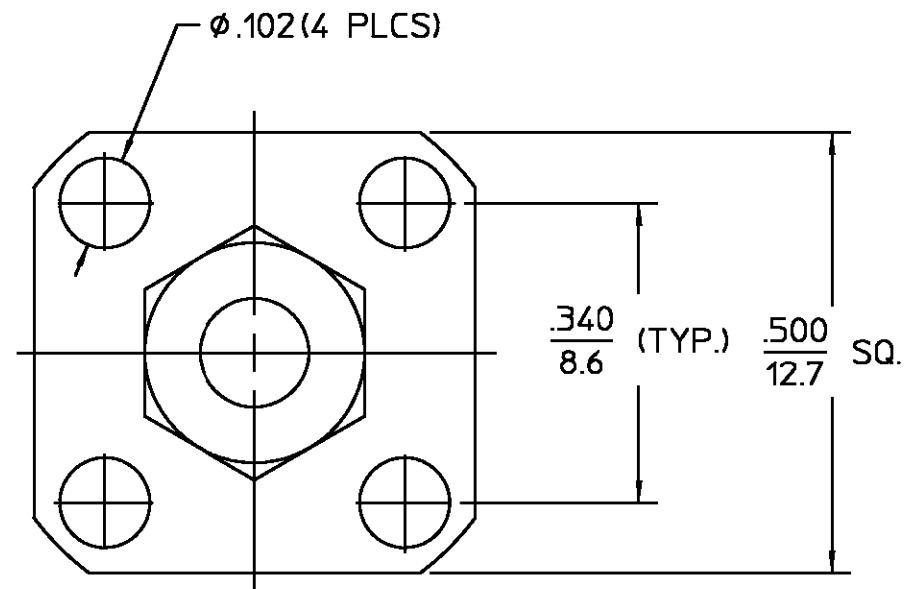

HOUSING CLAMP NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER QQ-P-35
INNER SLEEVE	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
FERRULE	COPPER OR BRASS ALLOY ROCKWELL F65 MAXIMUM	GOLD PLATE PER MIL-G-45204
COMPONENT	MATERIAL	FINISH

.XXX = in
XX.X = mm (REF)

NOTES:
1. CAPTURED CENTER CONTACT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN BY K. LE	DATE 9-20-96	 AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599	
FRAC. ± 1/64	DEC. ± .005	ANGLES ± 1°	CHECKED BY		
These drawings and speci- fications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale o f item(s) without written permission.			APPD BY <i>RAC</i>	11/26/96	
USE ASSY PROCEDURE		TITLE "OSM" FLANGE MOUNT CABLE JACK SOLDER ATTACHMENT			
NO. A.P. 20-530 408-04927		SIZE B	CODE IDENT NO. 26805	2036-8006-92	REV 01 ₀
		SCALE 5:1	SHEET 1 OF 1		