

LOC		DIST	REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APD
C1		REVISED ECR-08-009268			11APR08	A.Z	S.Y
C2		REVISED PER ECO-09-021826			27JAN2010	KK	HMR
C3		REVISED PER ECR-16-013723			26JUN17	TZ	HW

- △

CONTACTS: COPPER ALLOY.
- Ⓢ

SHELL: STAINLESS STEEL.
- HOUSING: UL 94V-0 RATED THERMOPLASTIC, COLOR: SEE TABLE.
- △


CONTACTS: 0.076 um MINIMUM GOLD OVER
0.76 um MINIMUM PALLADIUM NICKEL ON MATING AREA.
3.80 um MINIMUM MATTE TIN ON SOLDER TAILS
ALL OVER 1.27 um MINIMUM NICKEL.
SHELL: 2~5 um MINIMUM BRIGHT TIN.
- △

DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △

RECOMMENDED PC BOARD THICKNESS 1.57.
- △

CONTACTS: 0.076 um MINIMUM GOLD OVER
0.76 um MINIMUM PALLADIUM NICKEL ON MATING AREA.
3.80 um MINIMUM MATTE TIN ON SOLDER TAILS
ALL OVER 1.27 um MINIMUM NICKEL.
SHELL: 1.27 um MINIMUM NICKEL ALL OVER, TIN DIPPED ON TAILS.
- 6 RECOMMEND:
MATING FORCE: 35N MAX.
UNMATING FORCE: 13N MIN.
RECOMMENDED MATING PLUG SHOULD MEET USB2.0 STANDARD.
- △

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

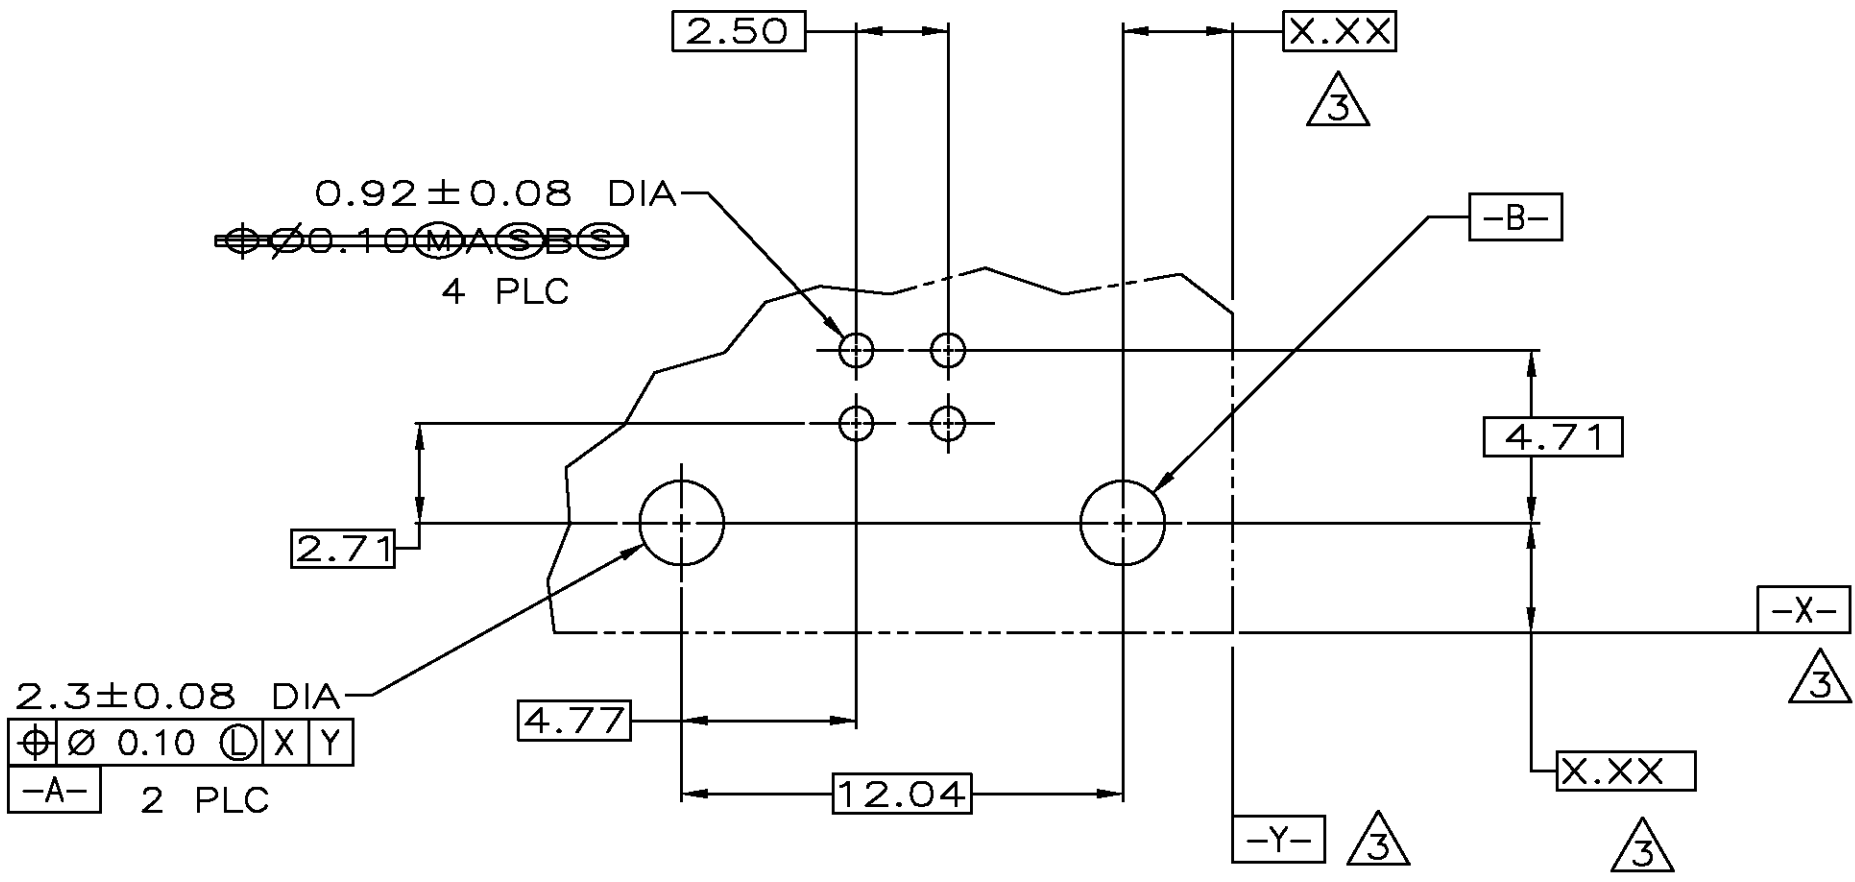

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

△

△ 7 OBSOLETE	YES	△	BLACK	292317-4
	NO	△	BLACK	292317-3
	YES	△	BLACK	292317-1

SUPERSEDED BY 292317-4		HIGH TEMPERATURE COMPATIBLE		FINISH	HOUSING COLOR	PART NUMBER
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME		
0 PLC ± -		1 PLC ± -		2 PLC ± 0.10		
3 PLC ± -		4 PLC ± -		ANGLES ± -		
MATERIAL		FINISH		WEIGHT		
△		SEE TABLE		CUSTOMER DRAWING		
DWN J.JIANG 20FEB04		CHK S.YAO 20FEB04		APVD T.SASAKI 20FEB04		
Tyo Electronics		Tyo Electronics Corporation		Shanghai, P.R.China, 200233		
SIZE		CAGE CODE		DRAWING NO		
A1		00779		©=292317		
SCALE		5:1		SHEET		1 OF 1
REV		C3				