


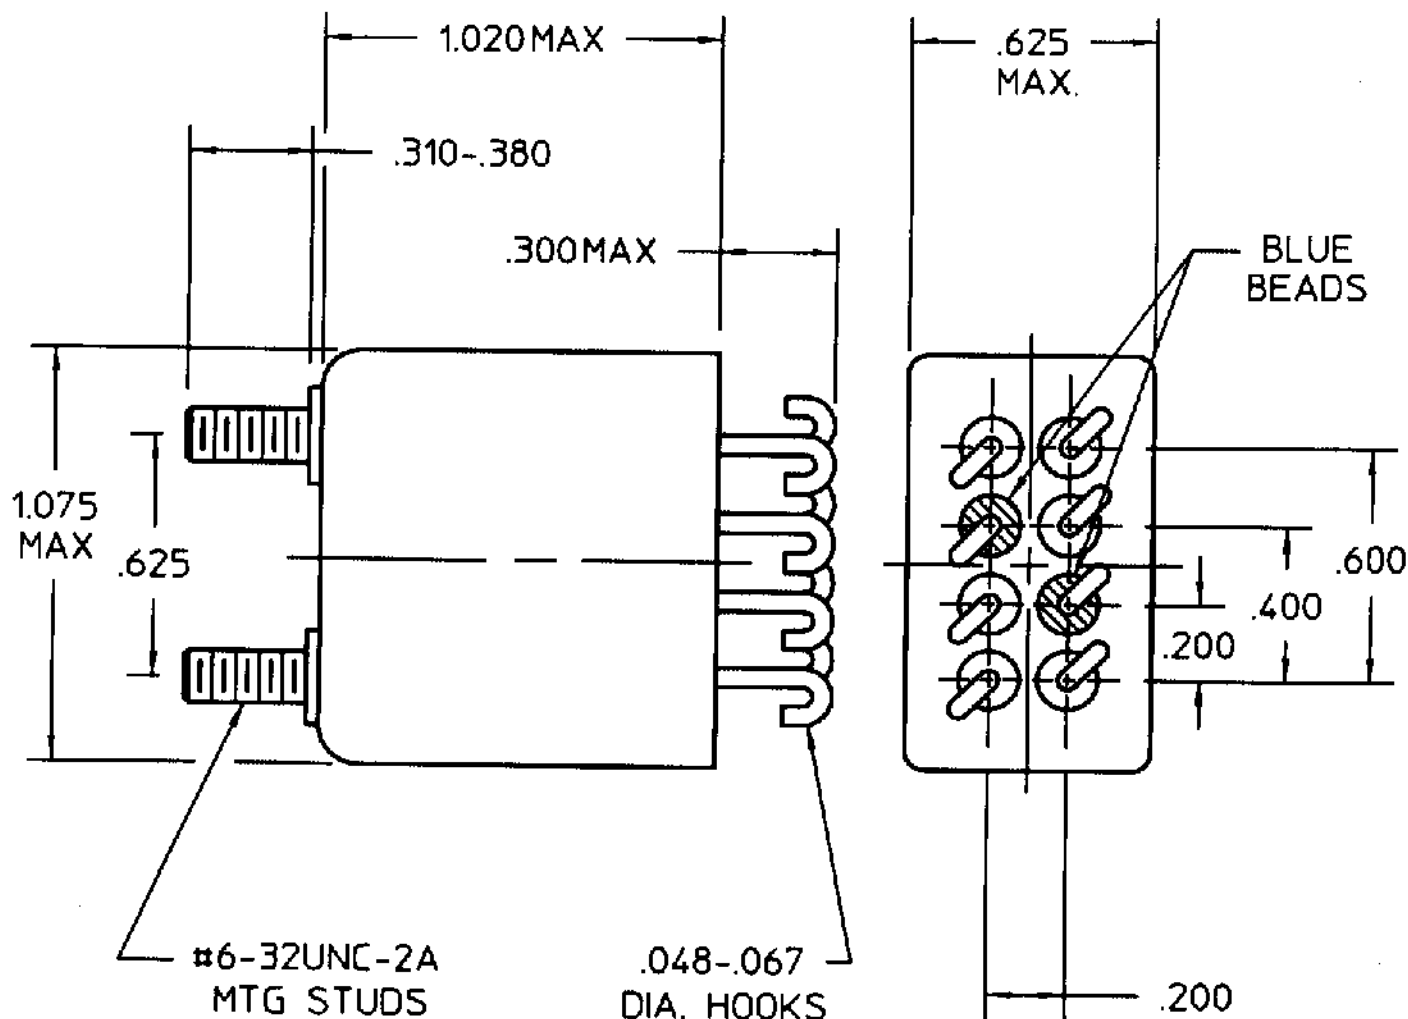


COIL: @ 25°C
 RESISTANCE 300 OHMS $\pm$ 10%
 NOMINAL VOLTAGE 28.0 VDC
 MUST OPERATE 13.0 VDC
 MUST RELEASE 7.0 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -70 °C TO +125 °C

NOTES: OPERATE & RELEASE 10 MS MAX.
 OPERATE BOUNCE 2 MS MAX.
 RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

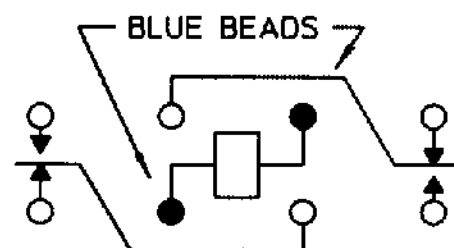

CONTACT RATING: 10 AMPS 28 VDC
 115 VAC/400 HZ, 1 PHASE,
 115/200 VAC, 3 PHASE RESISTIVE
 100,000 OPERATIONS

DR. R.B. 4/14/94 CK. 4/14/94

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. MS27245-5

TYPE '07' RELAY

B07E932BC4-0262