
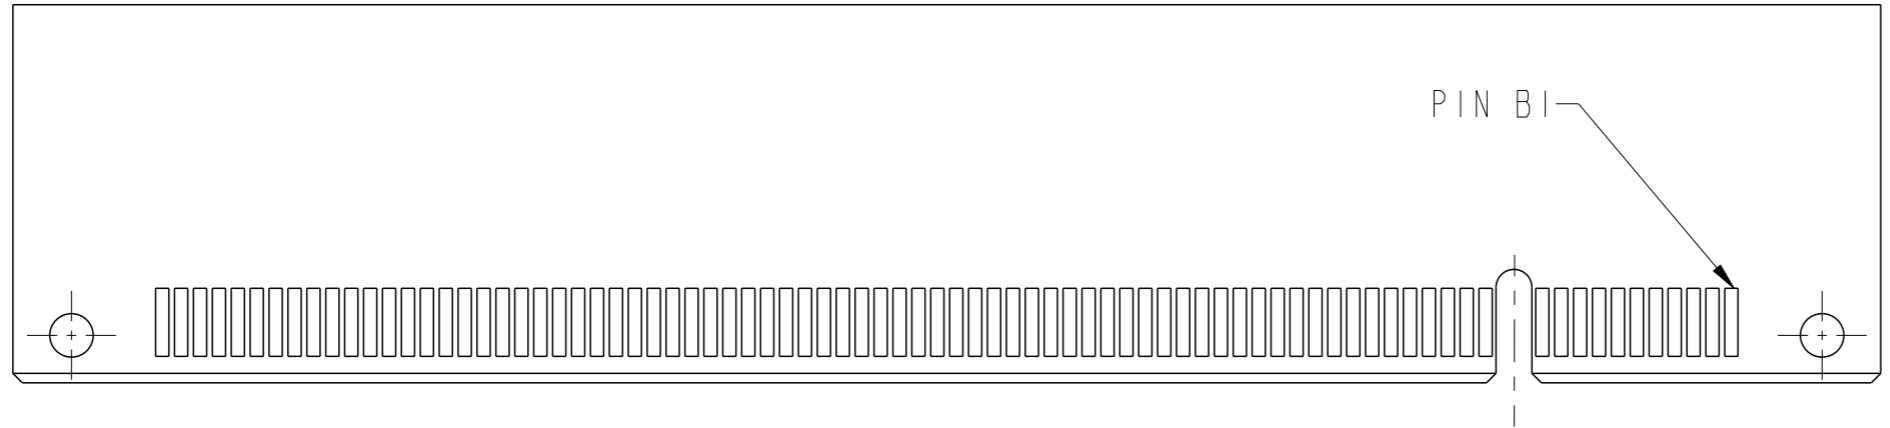
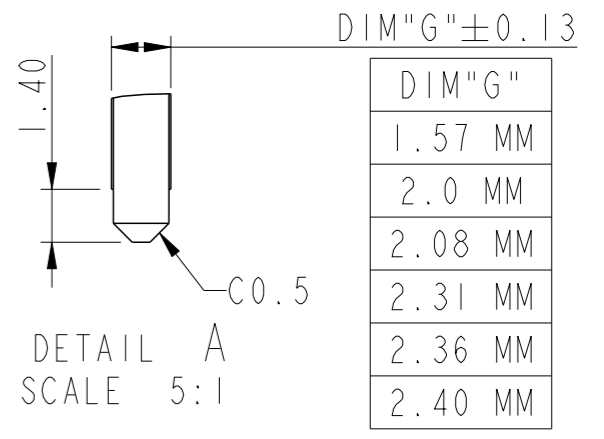
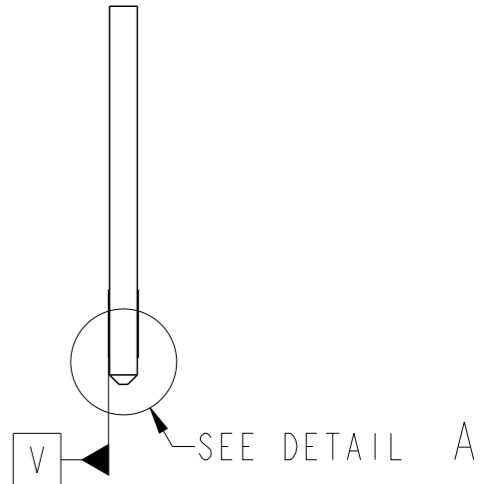




spec ref	dr	Jeny Ren	2017/11/01	projection	MM	size	A3	scale	2:1
tolerance std	eng	Jeny Ren	2018/05/15			ecn no	ELX-DG-30127-1	rel level	Released
ASME Y14.5	chr	-	2018/05/22						
TOLERANCES UNLESS OTHERWISE SPECIFIED	appr	Nickor Zuo		PCI EXPRESS 4.0		10146027		rev	
surface	linear	0.X	±0.30	STRADDLE MOUNT				B	
ASME Y14.5	angular	0°	±2°	www.fci.com		Product-Customer Drw		sheet 1 of 4	

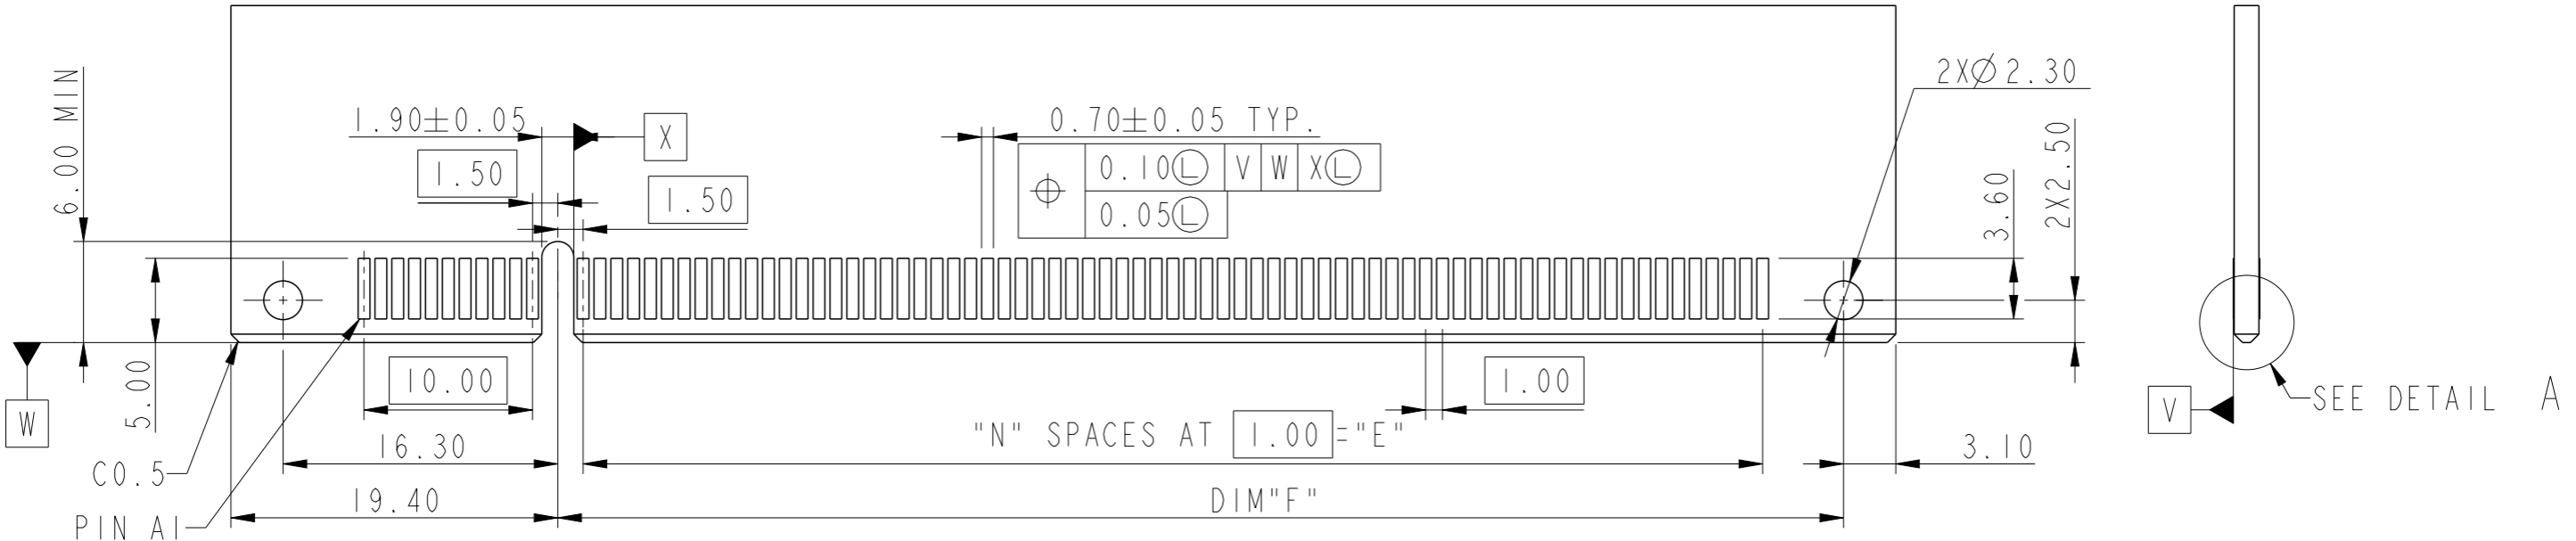

RECOMMENDED PCB LAYOUT


POSITION	N	DIM'F'
36	6	12.30
64	20	26.30
98	37	43.30
164	70	76.30

spec ref	dr	Jeny Ren	2017/11/01	projection	MM	size	A3	scale	2:1
tolerance std	eng	Jeny Ren	2018/05/15		← →	ecn no	ELX-DG-30127-1	rel level	Released
ASME Y14.5	chr	-	-						
surface linear ASME Y14.5 angular	TOLERANCES UNLESS OTHERWISE SPECIFIED			product family	PCI EXPRESS 4.0	dwg no	10146027	rev	B
	0.X	±0.30	Amphenol FCI www.fci.com	STRADDLE MOUNT	cat. no.				
	0.XX	±0.20				PDS: Rev :B STATUS:Released Printed: May 23, 2018			
0.XXX	±0.1								
ASME Y14.5	angular	0°	±2°						

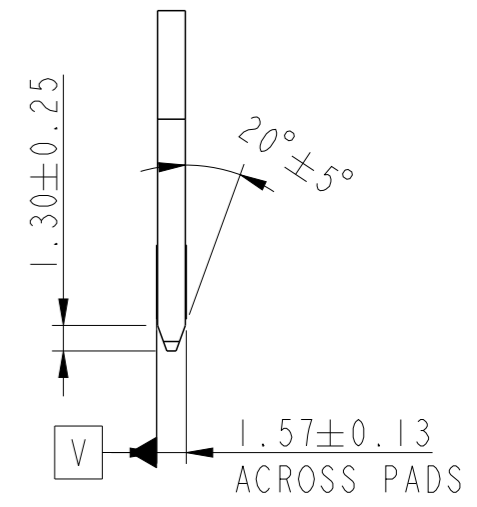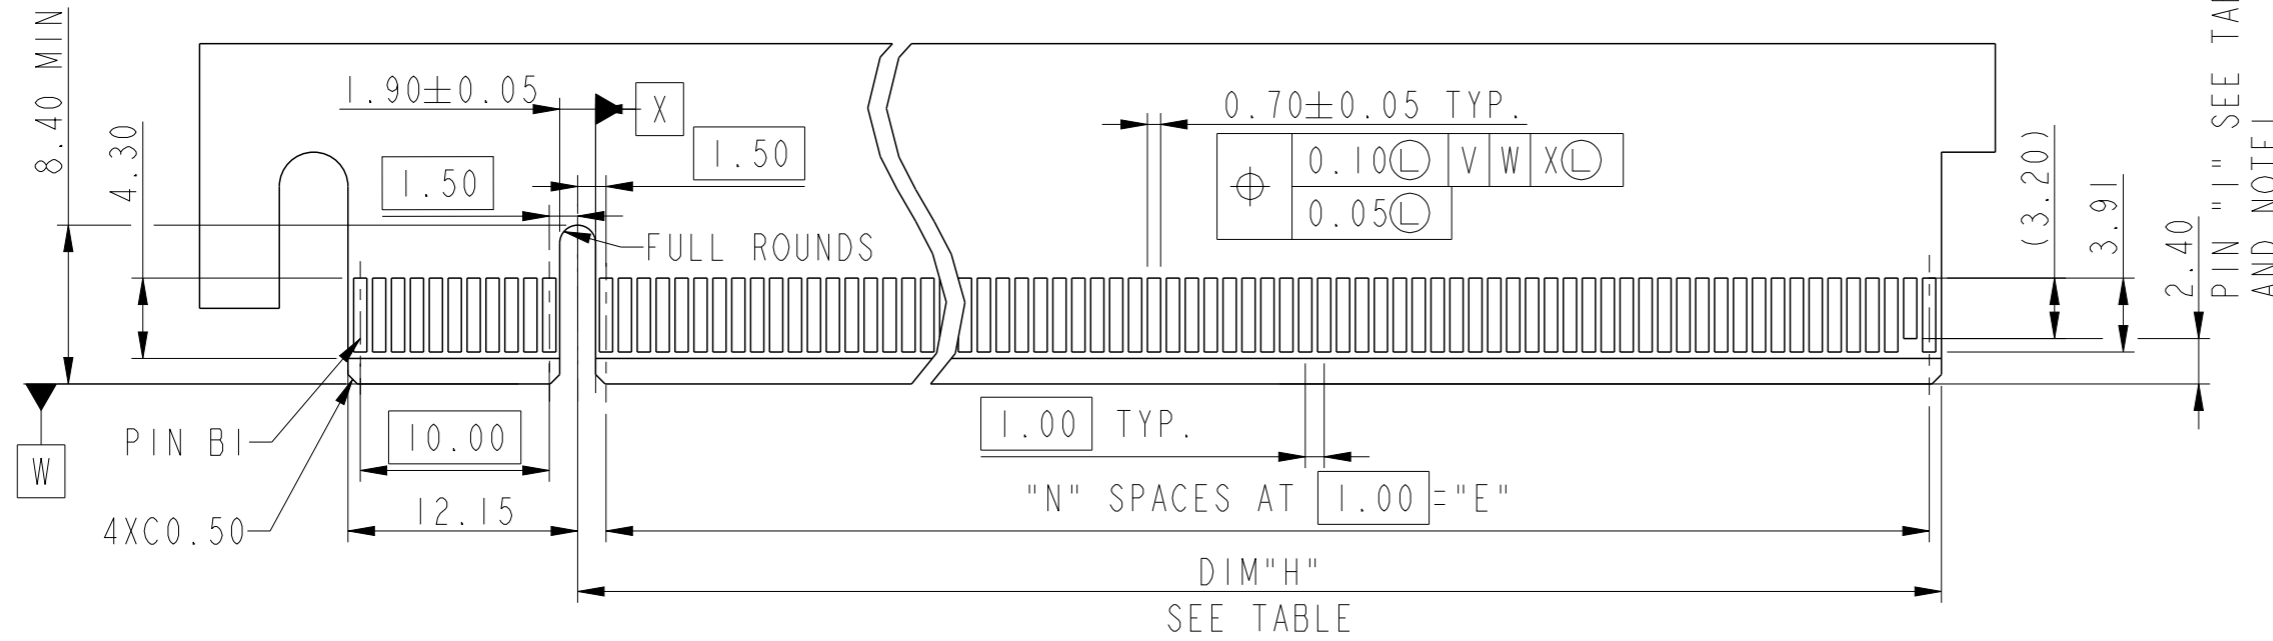

- NOTES:
1. NO TIE BAR PERMITTED FROM CARD EDGE TO LEADING EDGE OF PAD FOR PINS A1 AND PIN "I".
 2. CHAMFER EDGES MUST BE FREE OF CUTTING BURRS.
 3. TOLERANCE : ± 0.13

← I/O PANEL DIRECTION
PRIMARY (COMPONENT) SIDE

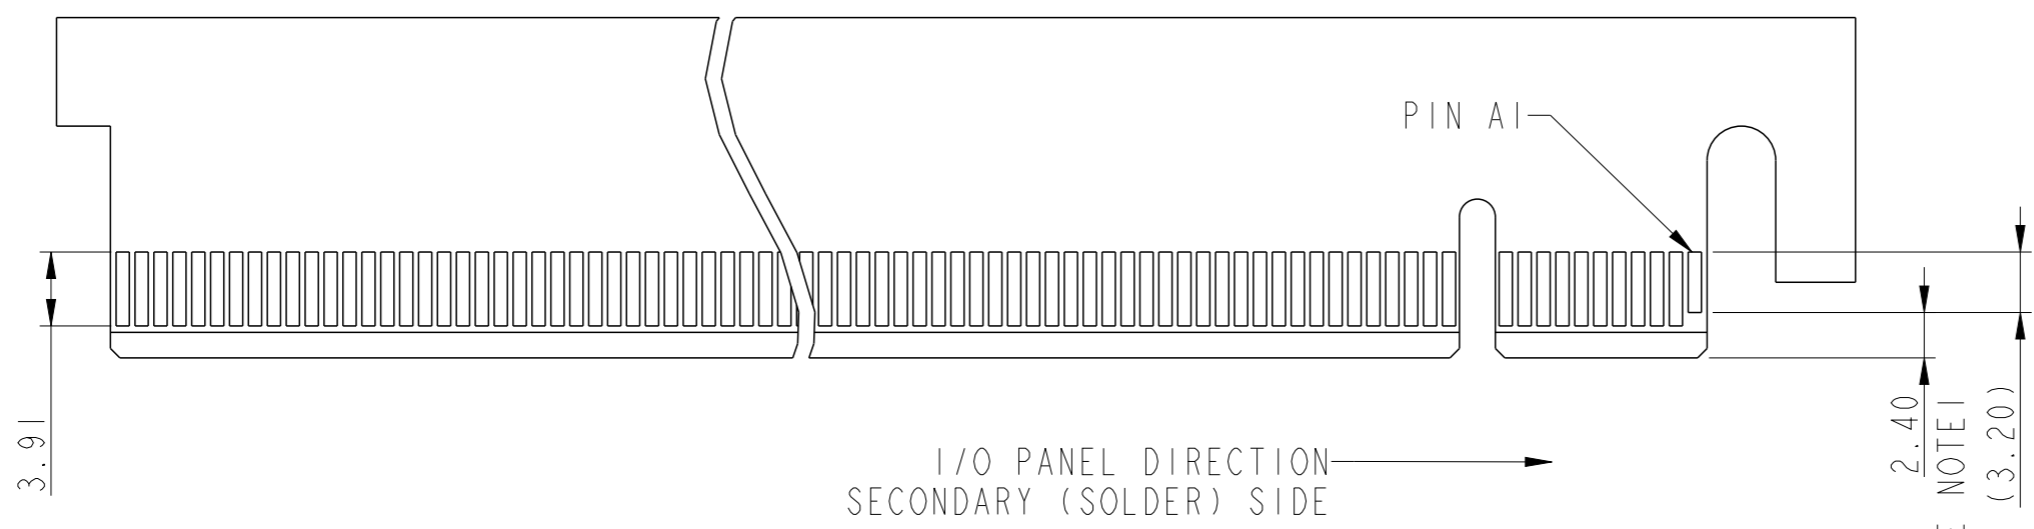

POSITION	N	DIM"H"	PIN "I" (SEE NOTE 1)
36	6	8.15	B17
64	20	22.15	B31
98	37	39.15	B48
164	70	72.15	B81

spec ref	dr	Jeny Ren	2017/11/01	projection	MM	size	A3	scale	2:1
tolerance std	eng	Jeny Ren	2018/05/15			ecn no	ELX-DG-30127-1	rel level	Released
ASME Y14.5	chr	-	-						
surface		linear	0.X	±0.30	Amphenol FCI PCI EXPRESS 4.0 STRADDLE MOUNT	dwg no	10146027	rev	B
		ASME Y14.5	angular	0°					
www.fci.com		cat. no.		Product-Customer Drw			sheet 3 of 4		

NOTES:

- MATERIAL:
HOUSING: HIGH PERFORMANCE RESINS, BLACK, UL94 V-0 RATED.
CAP: HIGH PERFORMANCE RESINS, BLACK.
CONTACT: COPPER ALLOY.
- PLATING:
UNDERPLATE: 50 u" MIN NICKEL OVER ALL
SOLDER AREA: 100 u" MIN TIN (LEAD FREE)
MATING AREA: SEE PRODUCT PART NUMBER.
- PRODUCT SPECIFICATION: GS-12-1193
- PACKAGE SPECIFICATION: GS-14-2401.
- PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- ONLY P/N 10146027-XXXX10XX CAN GO IR REFLOW PROCESS.
- THIS PRODUCT WILL WITHSTAND EXPOSURE TO 260°C PACK TEMPERATURE FOR 10 SECONDS IN REFLOW SOLDERING APPLICATION.
- DATE CODE BE PRINTED ON PROPER SURFACE.

PRODUCT PART NUMBER:

10146027- X X X X X X X X

NO. OF POSITION
36:36 POSITIONS
64:64 POSITIONS
98:98 POSITIONS
A4:164 POSITIONS


PCB THICKNESS OPTION
0:1.57 MM
1:2.0/2.08 MM
2:2.31/2.36/2.4 MM

LEAD FREE OPTION
LF: LEAD FREE

RESERVE
0

CAP OPTION (SEE NOTE 6)
0: WITHOUT CAP
1: CAP

CONTACT PLATING
0: 15 u" Au
1: 30 u" Au
2: 15 u" GXT

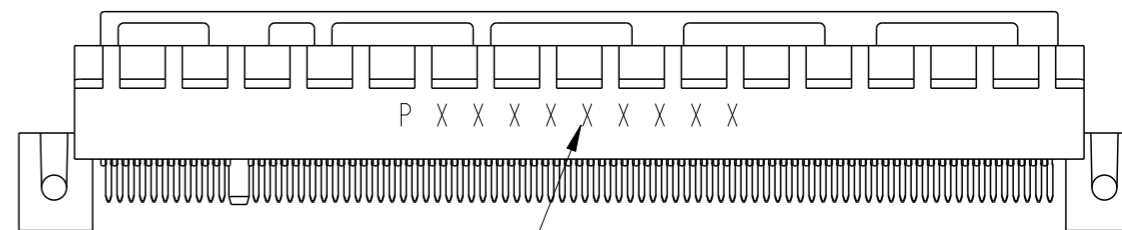

DATA CODE INFORMATION

P X X X X X X X X X

PRODUCTION LINE CODE
DATE CODE THROUGH 01 TO 31
WEEK NUMBER 01 THROUGH 53
YEAR CODE; MOST RIGHT OF DIGIT OF PRODUCTION. (e.g 2007=7)
MANUFACTURE SITE; 2 FOR DONGGUAN SOURCE, P FOR CHINA

Amphenol FCI

© 2016 AFCI

spec ref		dr	Jeny Ren	2017/11/01	projection 	MM ←→	size	A3	scale	2:1
tolerance std ASME Y14.5		eng	Jeny Ren	2018/05/15			ecn no	ELX-DG-30127-1		
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	-			rel level	Released		
surface 	linear	0.X	±0.30	Amphenol FCI	PCI EXPRESS 4.0	dwg no	10146027	rev	B	
		0.XX	±0.20							
		0.XXX	±0.1							
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	Product-Customer Drw	sheet 4 of 4			