

1:3 Transformer

5 - 1200 MHz

V2

Features


- Surface Mount
- 1:3 Impedance
- Available on Tape and Reel
- RoHS Compliant and Pb Free
- 260°C Reflow Compatible
- Excellent Temperature Stability
- Can be used on 50 Ω & 75 Ω Systems

Description

The MABA-010441-CT38A0 is a 1:3 transformer assembled in a surface mount package.

Ideally suited for CATV Broadband.

Functional Schematic

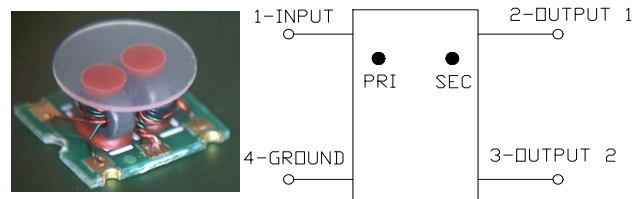

Pin Configuration

Pin No.	Function
1	Primary Dot (input)
2	Secondary Dot (output 1)
3	Secondary (output 2)
4	Primary (ground)

Electrical Specifications: Freq. = 5 - 1200 MHz, $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega$, $P_{in} = 0 \text{ dBm}$

Parameter	Conditions	Units	Min.	Typ.	Max.
Impedance Ratio	—	—	—	1:3	—
Insertion Loss 1 (Pin 1 - Pin 2)	5 - 50 MHz 50 - 1000 MHz 1000 - 1200 MHz	dB	—	0.75 1.10 1.75	1.20 1.90 2.25
Insertion Loss 2 (Pin 1 - Pin 3)	5 - 50 MHz 50 - 1000 MHz 1000 - 1200 MHz	dB	—	0.70 1.10 1.75	1.30 2.20 2.50
Amplitude Unbalance	5 - 50 MHz 50 - 1000 MHz 1000 - 1200 MHz	dB	—	0.02 0.05 0.15	± 0.70 ± 0.70 ± 0.80
Phase Balance	5 - 50 MHz 50 - 1200 MHz	degrees	—	0.6 6.6	± 5 ± 10
Input Return Loss	5 - 50 MHz 50 - 1000 MHz 1000 - 1200 MHz	dB	19 15 15	21 21 24	—

Ordering Information¹

Part Number	Description
MABA-010441-CT38A0	900 piece reel
MABA-010441-CT38A0-TB	sample board

1. All sample boards include 5 loose parts.

Absolute Maximum Ratings


Parameter	Absolute Maximum
Input Power	250 mW
DC Current	200 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

1:3 Transformer 5 - 1200 MHz


V2

Typical Performance Curves: $T_A = 25^\circ\text{C}$, $Z_0 = 75\ \Omega$, $P_{IN} = 0\ \text{dBm}$


Insertion Loss: Pin1—Pin2

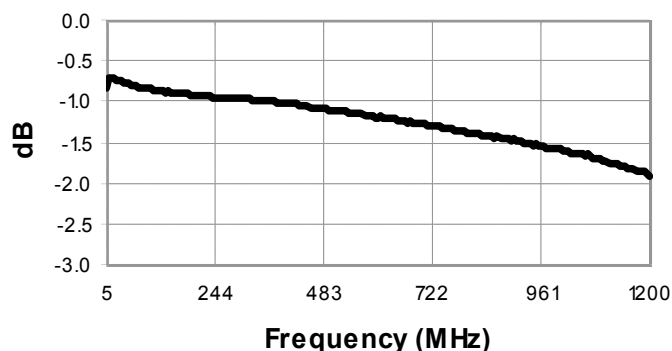


Insertion Loss: Pin1—Pin3

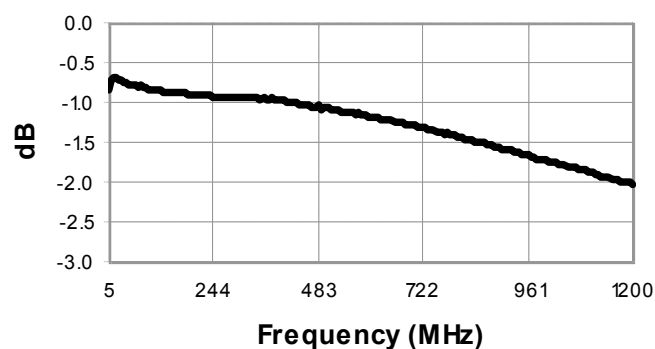


Amplitude Balance

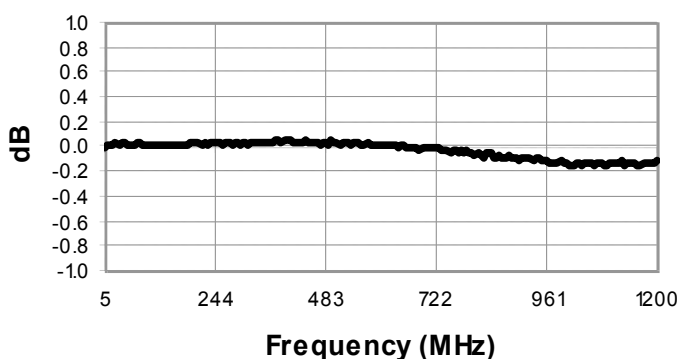


Phase Balance

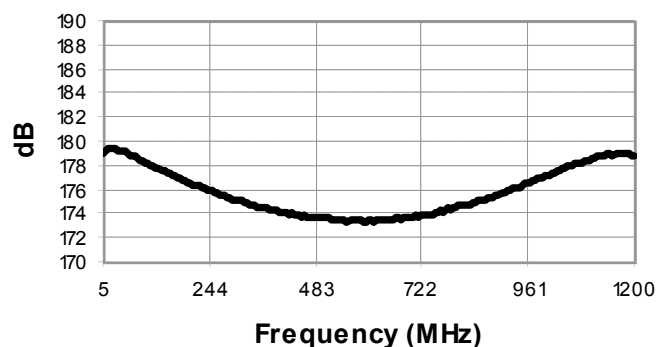

Return Loss: Input

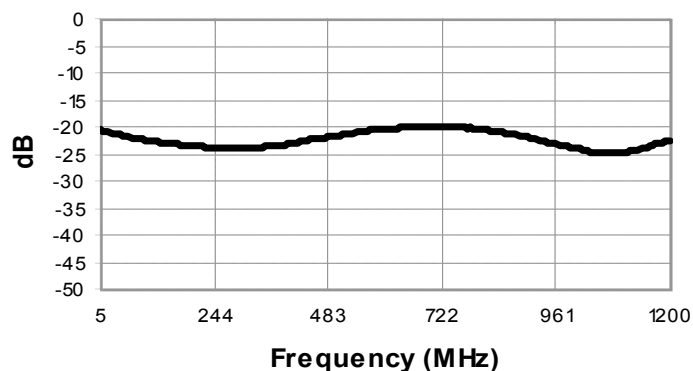


Return Loss: Output

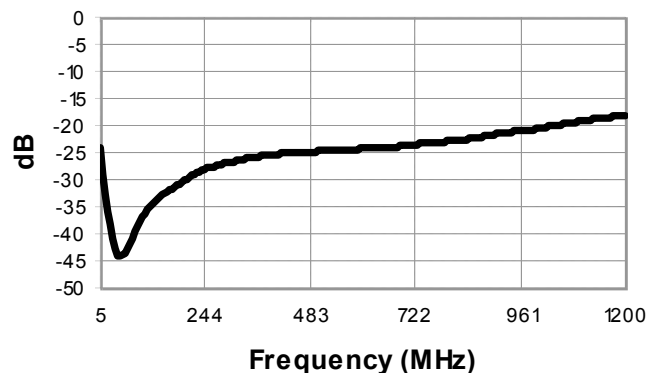

1:3 Transformer 5 - 1200 MHz


V2

Recommended DC Bias Circuit

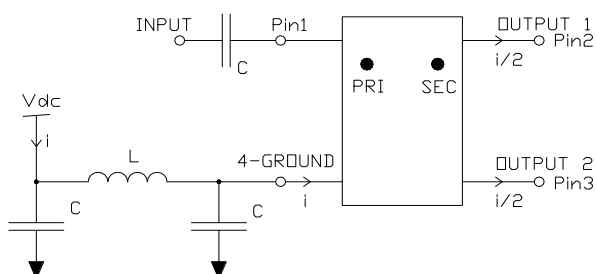


Cap/Ind	5 - 50 MHz	50 - 1200 MHz
C	100 nF	10 nF
L	10 μ H	1 μ H

Recommended Board Layout

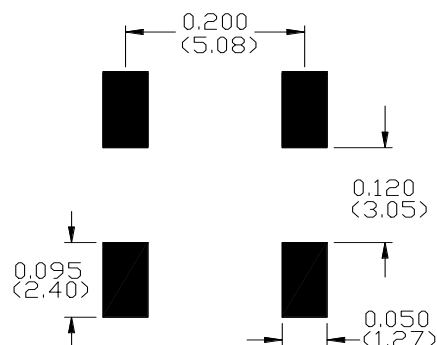

Outline Drawing

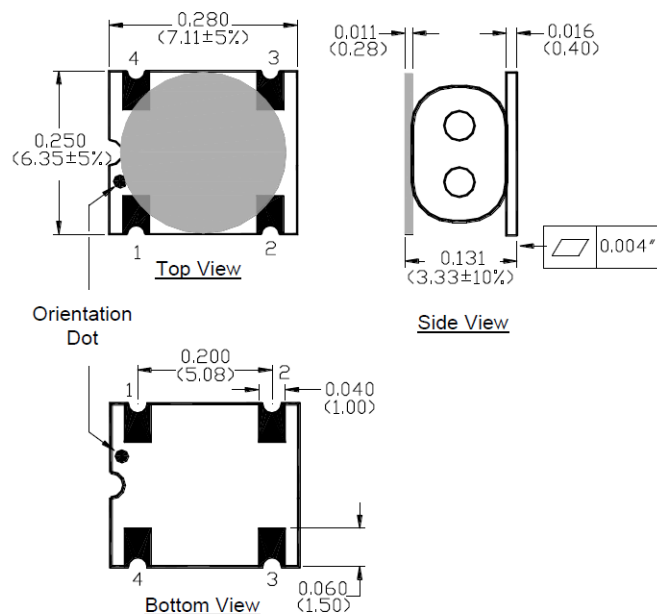

Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	900
Reel size	mm	330
Tape width	mm	16.00
Pitch	mm	12.00
A ₀	mm	6.70
B ₀	mm	7.50
K ₀	mm	3.60
Orientation	-	F27

Dimensions in mm.
Tolerance: ± 0.2 mm unless otherwise noted.
Model number and lot code are printed on the reel.
Finish: ENIG

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.