

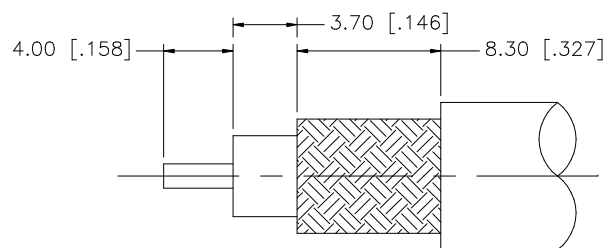
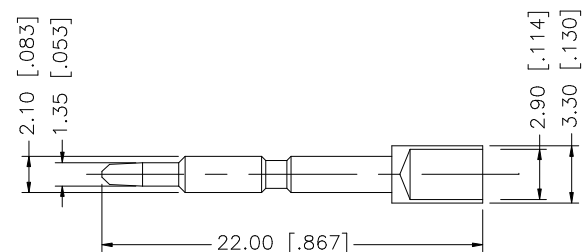


REV.	DATE	DESCRIPTION
A	03/04/04	UPDATE DRAWING FORMAT

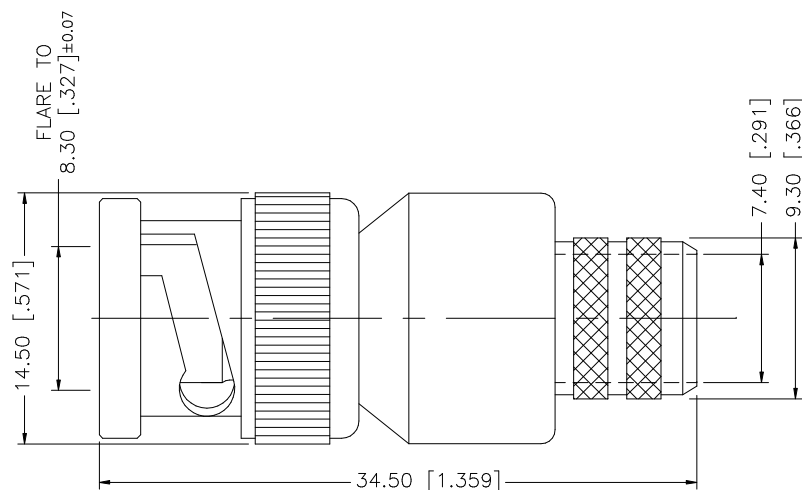

RECOMMENDED CABLE
STRIPPING DIMENSIONS

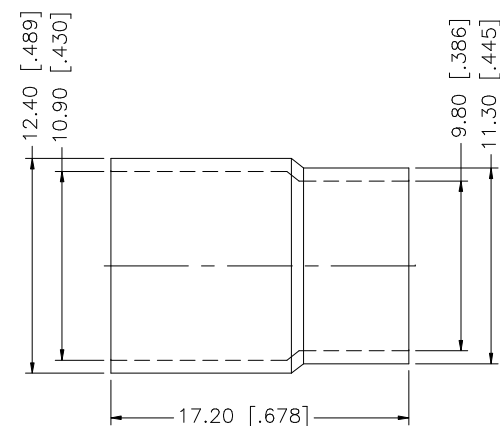

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .118"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex BNC CRIMP PLUG (FOR BELDEN 89913 PLENUM CABLE)									
8						DRAWN	G.R.S.	03/04/04											
7						CHECKED													
6						ISSUED													
5						SHEET	1 OF 1				PART DESCRIPTION								
4	FERRULE	BRASS	NICKEL	1							PART NO.								
3	CONTACT PIN	BRASS	GOLD	1							112627								
2	INSULATOR	TEFLON	NATURAL	1							DWG. NO.								
1	BODY	BRASS	NICKEL	1						112627									
	DESCRIPTION	MATERIAL	FINISH	QTY						DWG. NO.		112627.DWG		REV.	A	SIZE	A	SCALE	NA