





REV.	DATE	DESCRIPTION
A	02/02/05	UPDATE DRAWING FORMAT AND MODIFY PART DESCRIPTION

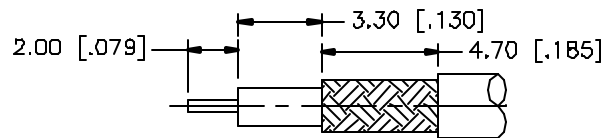

RECOMMENDED CABLE
STRIPPING DIMENSIONS

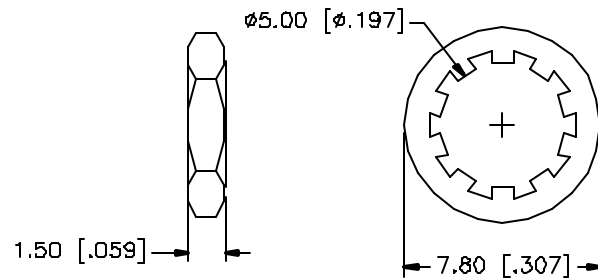

RECOMMENDED
MOUNTING HOLE

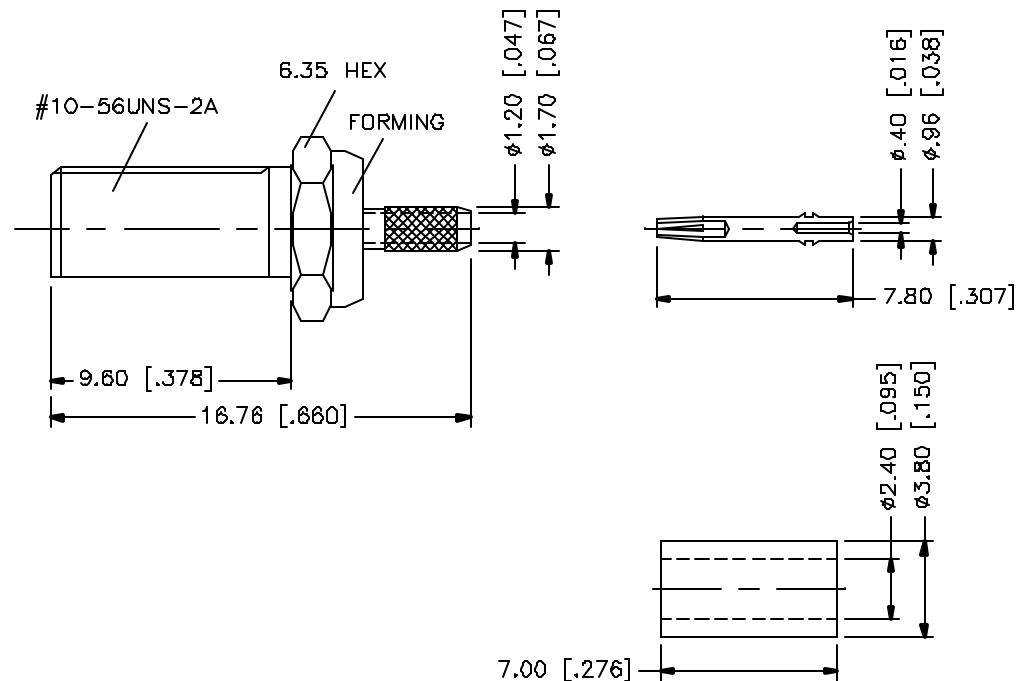

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER
3. MAX. PANEL THICKNESS = 6.8mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	02/02/05						
7	FERRULE	COPPER	GOLD	1		CHECKED			PART DESCRIPTION MCX BULKHEAD CRIMP JACK (FOR RG-178B/U, 196A/U CABLE)					
6	HEX NUT	BRASS	GOLD	1		ISSUED								
5	LOCK WASHER	BRASS	GOLD	1		SHEET	1 OF 1		PART NO. 252167					
4	GASKET	SILICONE	RED	1										
3	CONTACT PIN	PHOS. BRONZE	GOLD	1				DWG. NO. 252167.DWG						
2	INSULATOR	TEFLON	NATURAL	1										
1	BODY	BRASS	GOLD	1					REV. A	SIZE A	SCALE NA			
DESCRIPTION					MATERIAL	FINISH	QTY	C:/252/252167.DWG						