

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PROSPER, ILLINOIS

FED. MFR. CODE 91929

SWITCH-BASIC

CATALOG LISTING

ISEI-12

ISEI-12
ISSUE 5

REPLACES

RELEASE NO.

ISEI-12
PAGE 1 OF 1

M

DRAWING
NUMBER

ISSUE

8

10

8

CHECK

REVISIONS

A	CO	16449	D A W	12 JAN 62
B	CO	34213	J A L	24 SEPT 74
C	CO	51463-G	WJM	27 JUL 83
D	CO	57041A	CJH	21 MAR 85
E	CO	94274	DLM	MAR 99

CHECK

27 FEB 62

D A W

CHECK


12 JAN 62

D A W

DRAWN

FORMTEK

FO-50378

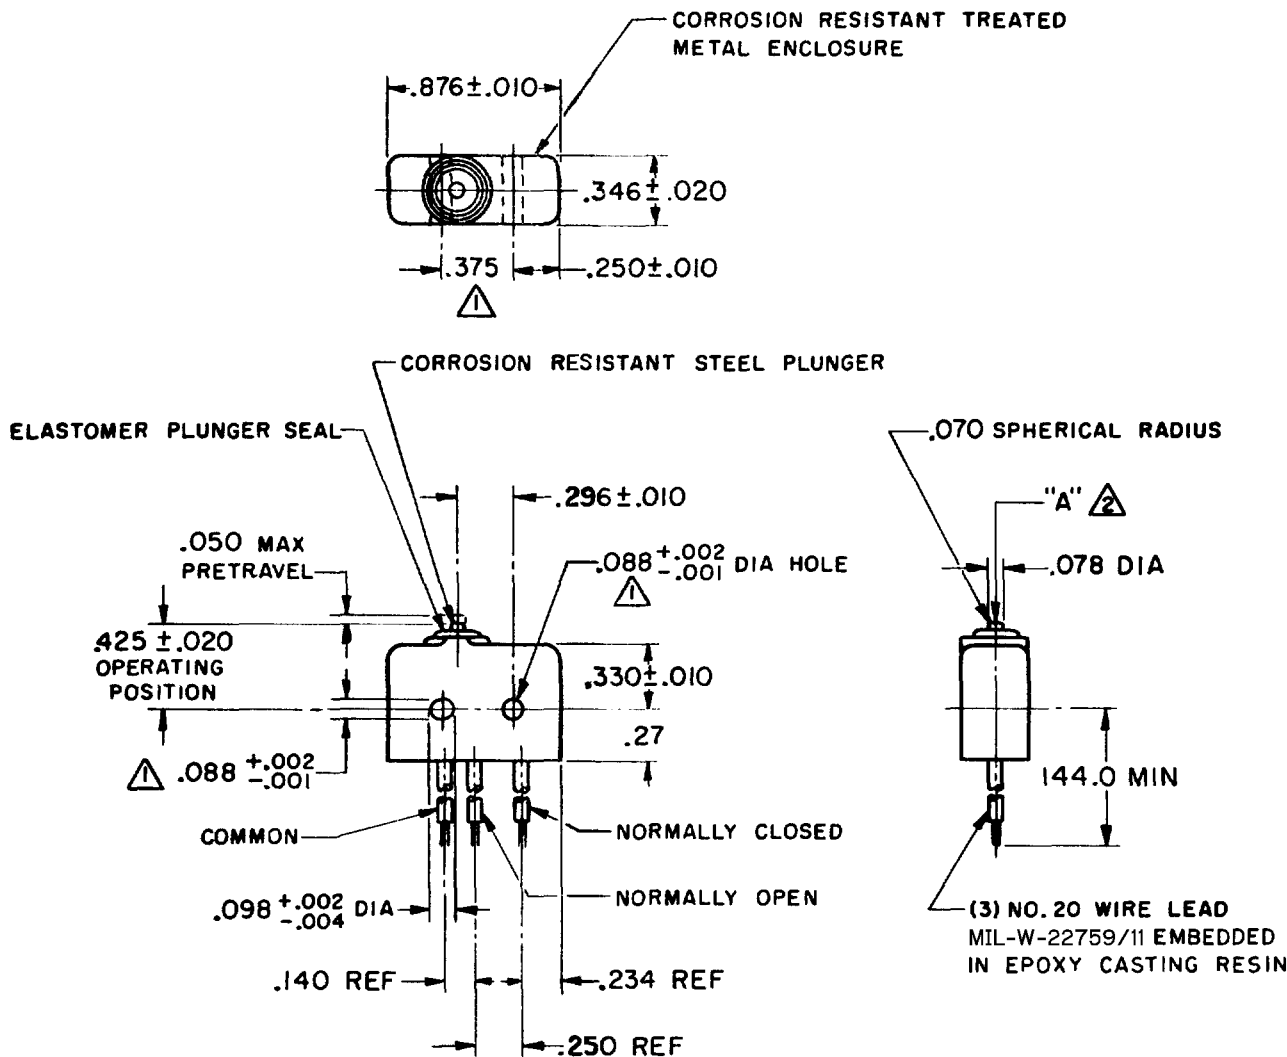

NOTE -

- 1 - MOUNTING HOLES WILL ACCEPT $.087$ MAX DIA PINS OR SCREWS ON $.375 \pm .002$ CENTERS
- 2 - ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
- 3 - WEIGHT OF SWITCH ONLY IS $.26$ OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS 4.65 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 5-17 OZ	CONTACT ARRANGEMENT P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 4 OZ MIN	250 VAC ----- 5 AMP	UNLESS OTHERWISE SPECIFIED
RELEASE TRAVEL ----- .004 MIN	30 VOLTS DC RATING	DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL ----- .004 MAX	INDUCTIVE ----- SEA LEVEL ----- 3 AMP	TOLERANCES ARE:
OVERTRAVEL ----- .003 MIN	RESISTIVE ----- SEA LEVEL ----- 5 AMP	ONE PLACE (.0) $\pm .030$
	MAXIMUM INRUSH ----- 24 AMP	TWO PLACE (.00) $\pm .015$
		THREE PLACE (.000) $\pm .005$
		ANGLES $\pm$
		WEIGHT $\pm$