

THIS DRAWING IS UNPUBLISHED
© COPYRIGHT 2000 BY TE CONNECTIVITY ALL RIGHTS RESERVED.





RELEASED FOR PUBLICATION

2015

LOC DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
G		REVISED PER E.O. P18449	04FEB2004	XS	RDR
H		REVISED PER E.O P21391	15JUN2012	AM	RDR
J		REVISED PER ECO-14-019072	23FEB2015	JA	DM
J1		REVISED PER PCN E-16-012386	01MAR2017	DD	DM

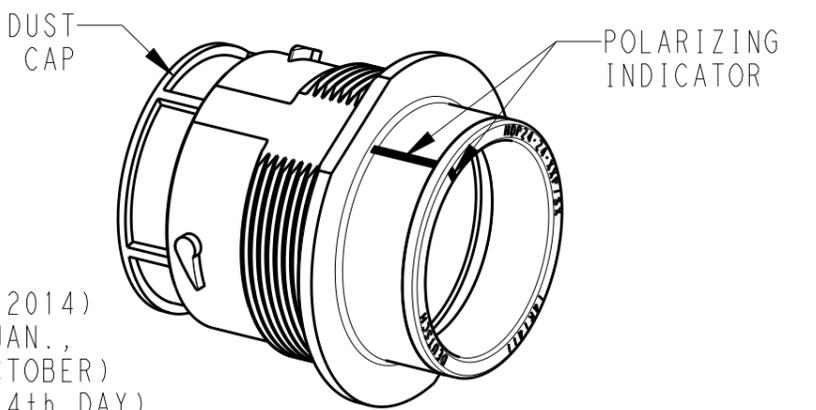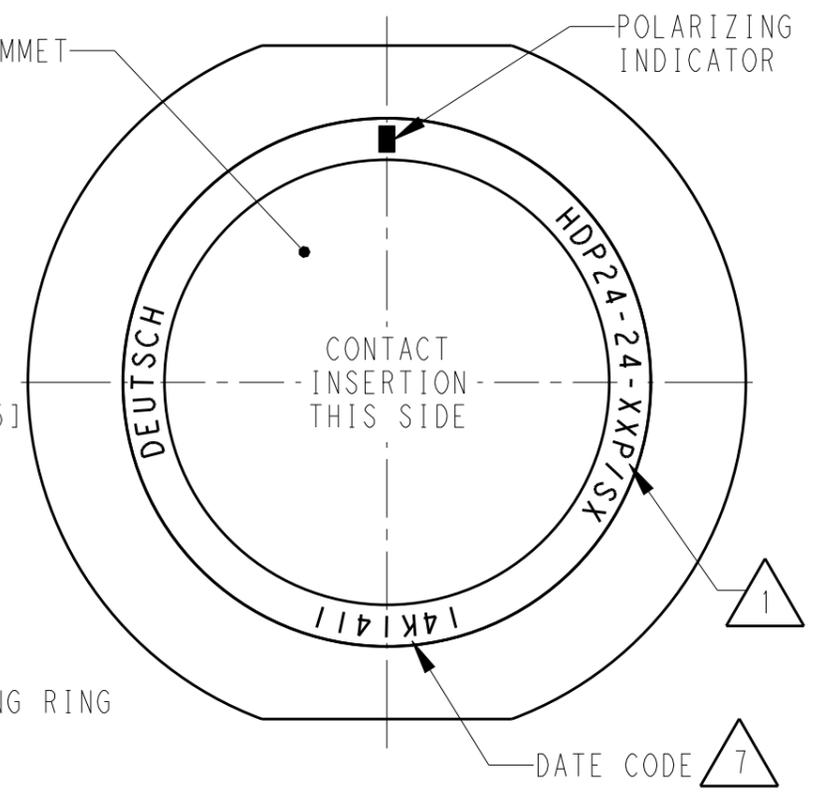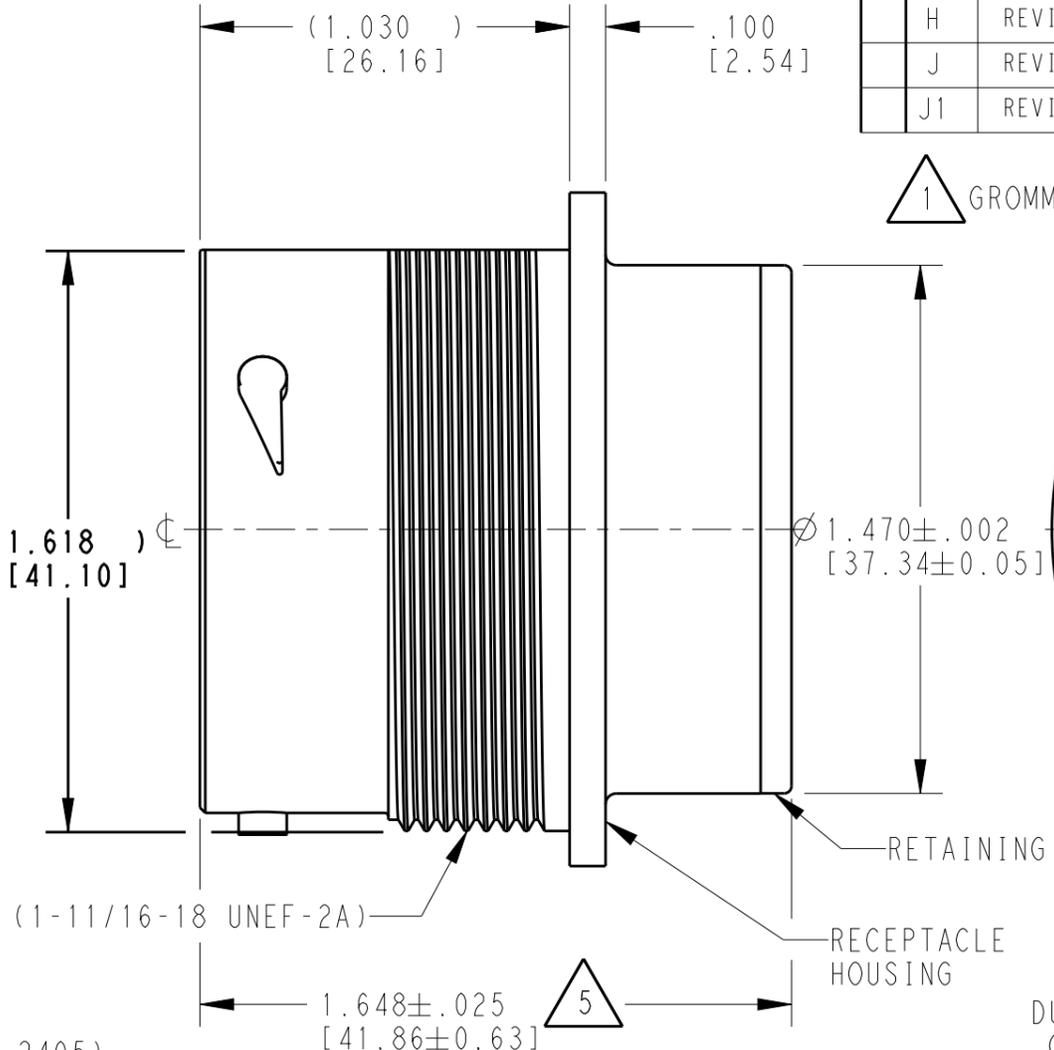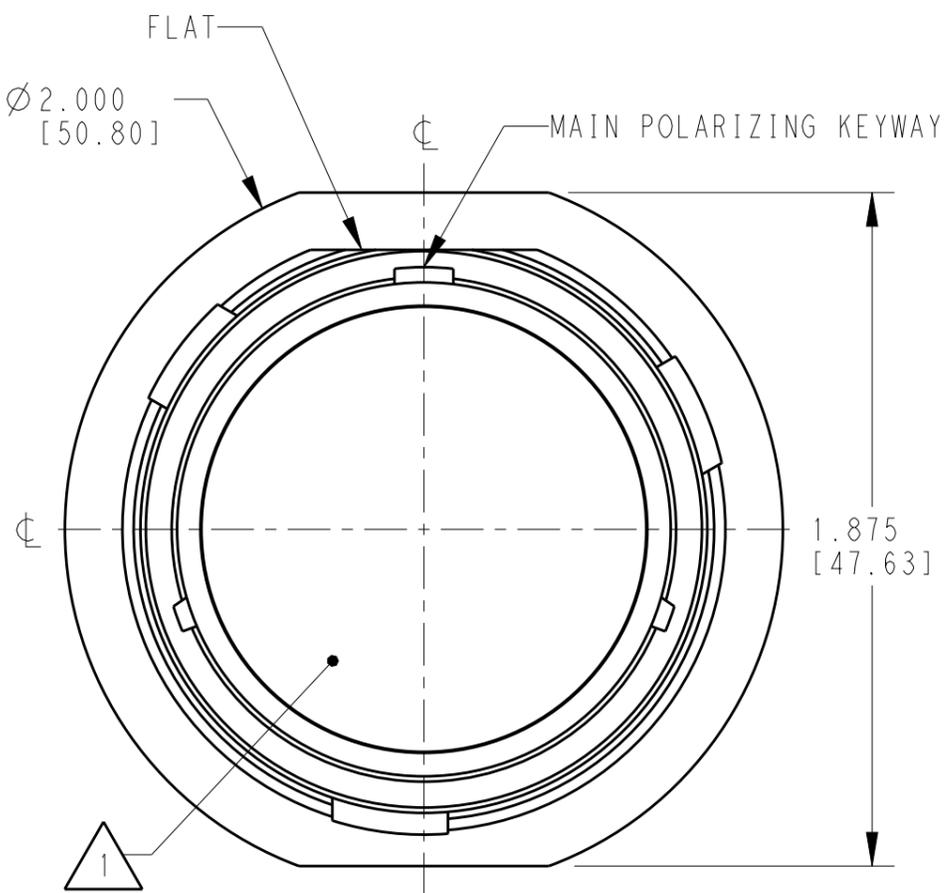

6. RECEPTACLE IS SUPPLIED WITH DUST CAP (2415-001-2405).

5 NOTED DIMENSION DOES NOT INCLUDE GROMMET PROTRUSION.

4 MATERIAL: RECEPTACLE HOUSING: PA66 GF10 (BLACK)
RETAINER RING: PA66 GF10 (GREEN, GRAY, BLUE)
GROMMET: SILICONE (ORANGE-RED)

3 SEE 0425-021-0000 APPLICATION SPECIFICATION
A. RECOMMENDED WIRE INSULATION RANGE
B. CONTACT REMOVAL TOOLS
C. RECOMMENDED MOUNTING HOLE & PANEL THICKNESS
D. MOUNTING HARDWARE & MOUNTING TORQUE.

2. THIS RECEPTACLE MATES WITH HDP26-24-XXP/SX-XXXX PLUG
X = SEAL TYPE (N,T,E)
XX = INSERT ARRANGEMENT
XXXX = MODIFICATION

1 SEE CUSTOMER DRAWING, 0425-014-2400 FOR AVAILABLE INSERT ARRANGEMENTS AND PART NUMBERS.

7 DATE CODE: IDENTIFIES THE YEAR, MONTH, DAY AND HOUR OF ASSEMBLY.
YEAR: FIRST AND SECOND DIGITS. (14 = 2014)
MONTH: THRID DIGIT, EXCLUDING I. A = JAN., B = FEB., C = MARCH... (K = OCTOBER)
DAY: FOURTH AND FIFTH DIGITS (14 = 14th DAY)
HOUR: SIXTH AND SEVENTH DIGITS (11 = 11AM)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	03MAR2000	 TE Connectivity	NAME RECEPTACLE, THREADED SIZE 24 HDP SERIES		
DIMENSIONS: INCHES [mm]		CHK	04FEB2004				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	16JAN2004				
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.015 [0.38] 4 PLC ± ANGLES ±0°30'0"		PRODUCT SPEC	0425-021-0000				
MATERIAL	FINISH	WEIGHT	APPLIC. SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	N/A		3	A3	4AFU8	Ⓢ-HDP24-24-XXP/SX	-
Customer Drawing		SCALE 2:1		SHEET 1 OF 1		REV J1	