



DIMENSIONS

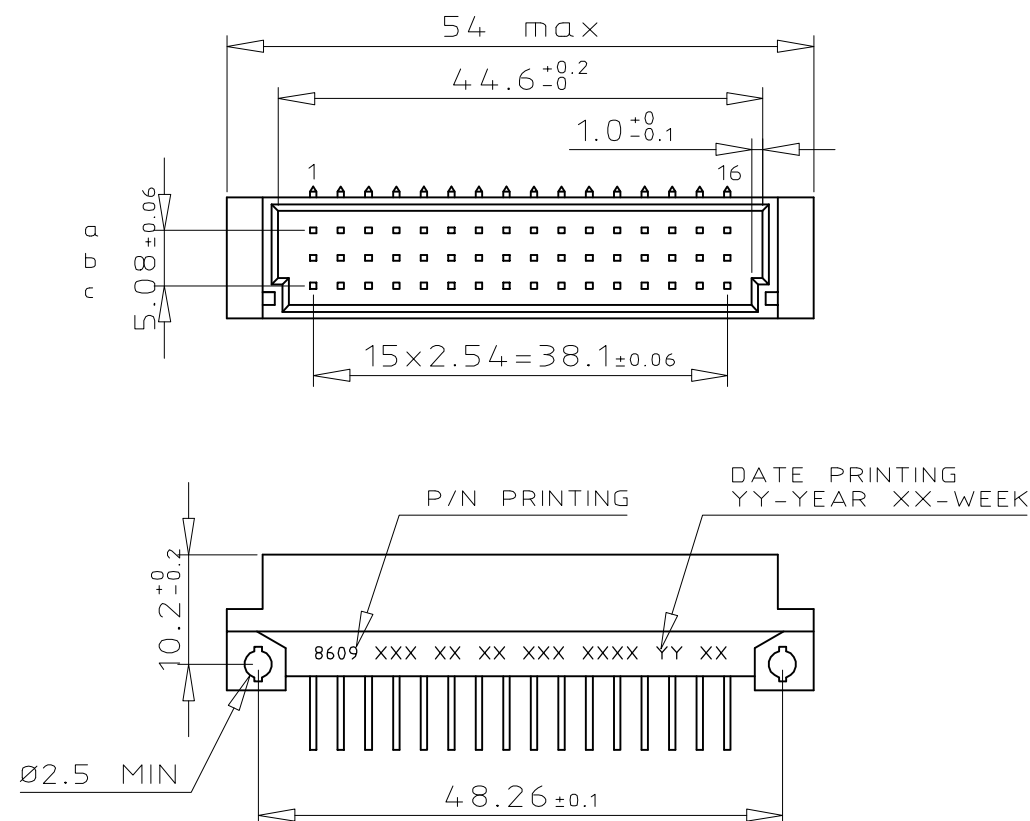


TERMINATION

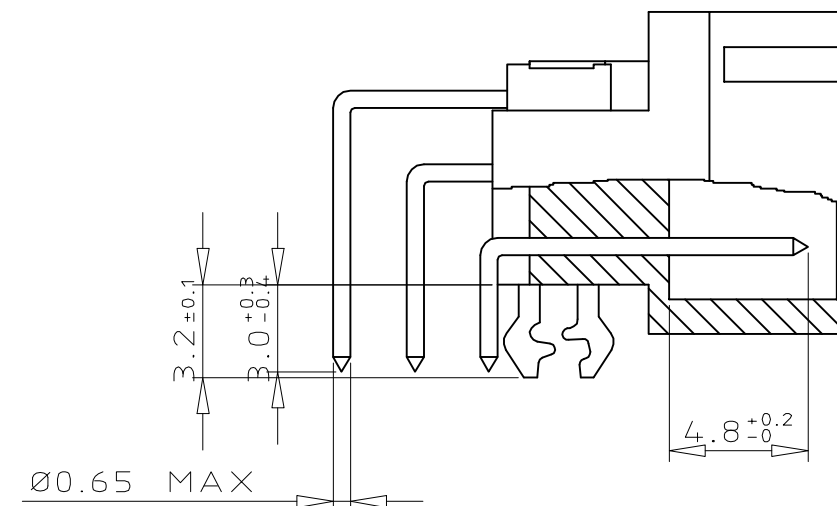

ORDERING INFORMATION



SERIES	8609	3	48	7	3	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a	-	-	-	-	-	-	-	-	-	16
ROW a b c	-	-	-	-	-	-	-	-	-	48
ROW a - c	-	-	-	-	-	-	-	-	-	32
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR										7
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE C/2										3
TERMINATION										
ANGLED SPILL										13
OPTIONS										
NO OPTION										7
WITH HARPOONS										H
PERFORMANCE CLASS										
DIN 41612 CLASS 3										4
DIN 41612 CLASS 2										5
DIN 41612 CLASS 1										6
AS PER MIL C 55302 / JSS 50808										8
PITCH PER ROW										
2.54 mm										5
LEAD FREE VERSION										ELF

PCB LAYOUT

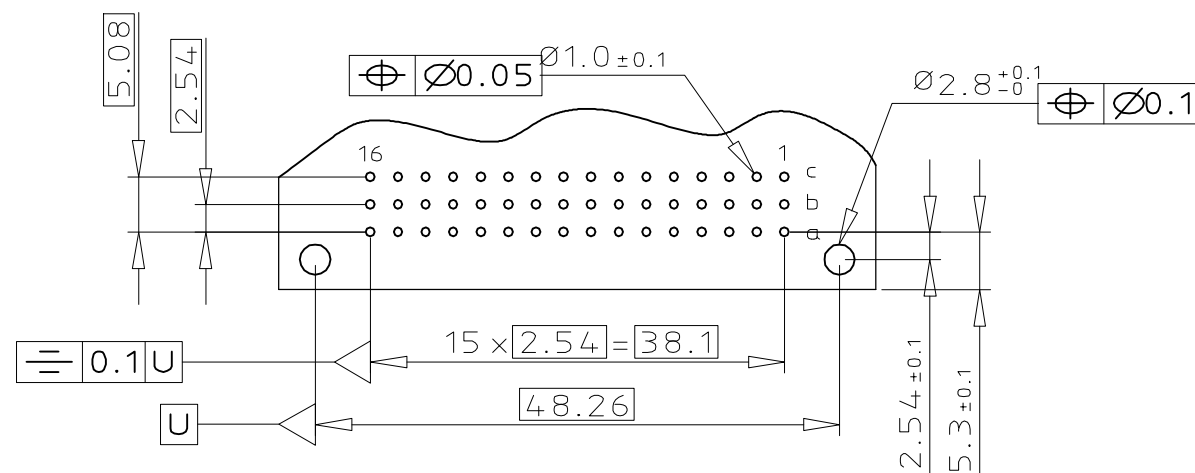

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

mat'l. code SEE DWG C-8609-0000A				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family 8609			
ltr	ecn no	dr	date	tolerances unless otherwise specified						title DIN STANDARD HEADER DIN 41612 STYLE C/2			
A	104-0063	MINI	2004-09-17	angles	linear	0.X ±0.1				dwg no C-8609-2003			
B	104-0100	MINI	2004-11-09			0.XX ±0.1							
C	105-0089	MINI	2005-05-19			0.XXX ±0.1							
D	106-0061	MINI	2006-05-31	dr	MINI K V		2004-09-17				sheet 1 of 1		size
E	108-0146	KR	2008-10-21	enr	RAKHEE G		2004-09-17				A3		
F	109-0217	KR	2009-10-13	chr	KESAVAN R		2010-01-13						
G	110-0020	KR	2010-01-13	appd	KESAVAN R		2010-01-13						
sheet index		revision		G									
sheet		sheet		1									