
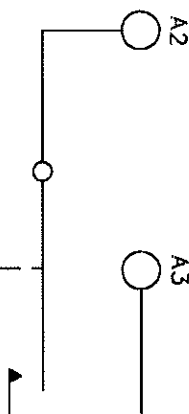




REVISIONS

RELEASED


REV.	DESCRIPTION	DATE	APPROVED
C	REMOVED NOT RELEASED FOR PRODUCTION	99/03/17	RS
D	40463 *MAX* ADDED TO .59	99/09/27	RS
E	41497 *MAX* ADDED TO .76 & 1.03	00/02/01	RS
F	06533 CHANGED ALTITUDE TO 60,000 ADDED TYCO P/N	02/07/25	RS
G	0134-03 CHANGED ITEM 2 FROM -010 TO -030	03/12/16	CS

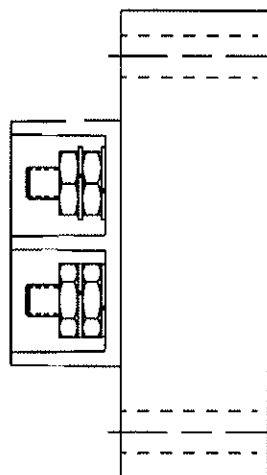

166 DIA. HOLE
2 MTG HOLES

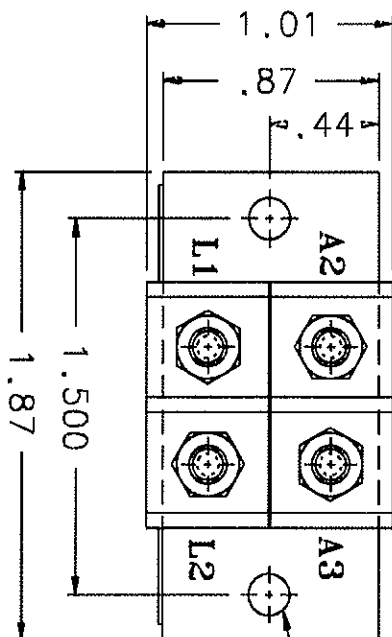

6-32 UNC-2A
4 REQ'D

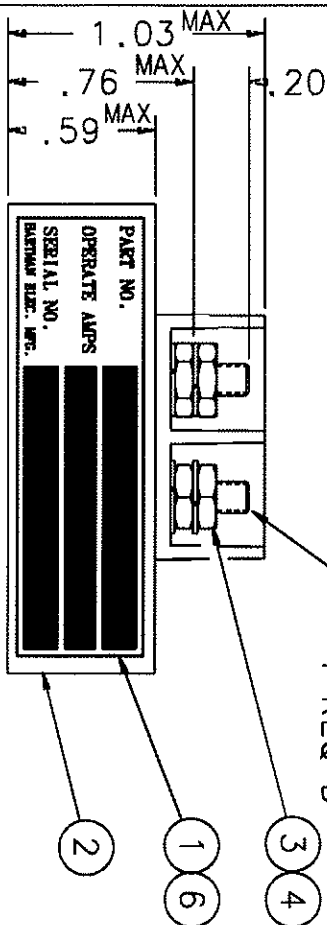

OPERATING CHARACTERISTICS
PICKUP 1.5 AMP MAX.
DROPOUT LESS THAN 1 AMP
CONTINUOUS 10 AMPS MAX.
15 AMP FOR 3 SEC
1.25 OZ.
MAX. WEIGHT
TEMP -55°C TO +71°C
VIBRATION 10 G's TO 500HZ
ALTITUDE 60,000 FT. MAX.
CONTACT RATING .2 AMP RES. 28 VDC
.08 AMP LAMP LOAD

QTY	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	CAGE NO	DRAWING OR SPECIFICATION	MATERIAL OR NOTE
6	1	39529-024 OVERLAY			
4	4	51806-014 WASHER - LOCK No.6 SPLIT			
3	4	50406-034 NUT 6-32 X 1/4 X 5/64 HEX.			
2	1	38496-030 RELAY ASSEMBLY - PRIMARY			
1	1	34246-001 PLATE - NAME			

2

1 6

3 4

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON
2 PL DEC./3 PL DEC./ANGLES
±.06 ±.010 ±.1°

DR BY	RCB	03/12/16	RELAY - CURRENT INDICATOR	DWG NO.	Q-50AB-2
CHK BY	CS	03/12/16		REF TYCO P/N	0-1616131-3
ENGR	CS	04-01-08			
MFG	W	04-01-14			
SIZE	C	74063			
SCALE	1/1	SHEET			

tyco Electronics

Hartford Division 175 N. Diamond Street Winsted, Ohio 44092

093