





THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LE3-8B0143	2008/11/07	Ivan	Change to pin hole
D	LEN1730292	2017/03/20	Ruru	Change Logo
E	CI90274	2019/02/20	Ruru	Modify Note

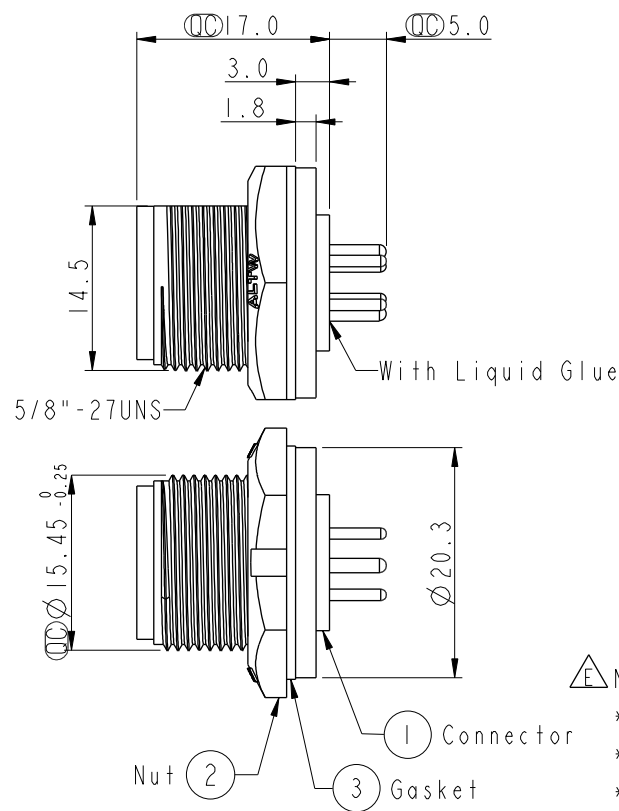


6Pin Male Connector
Female Pin PCB Layout



- Note:**
- * **QC** Important Dimensions To Check.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - B*** Use with Waterproof Cap or Dustcap
Panel Thickness Max: 3.0mm
 - B*** Use without Waterproof Cap or Dustcap
Panel Thickness Max: 4.0mm
 - * Gasket and Nut are packed separately
in PE bags.



Pin Assignments
Front View



Recommended Panel Cut-Out

UNIT:mm		TOLERANCE			TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1			Standard		BBD-06PMFP-SC7001		Ruru		2019/02/20	
.XXX ±0.05		ANGLES ±1°			Panel Screw 6Pin M Conn F Pin		DWG NO		CHECKED BY		DATE	
REV. E		WC-REV. A.3			SCALE 1:1		BBD-06PMFP-SC7001		Rita		2019/02/20	
		SHEET 1 OF 1			REV. E		CUSTOMER		APPROVED BY		DATE	
		WC-REV. A.3			ALTW		ALTW		Max		2019/02/20	
		QC: Inspection item										

Amphenol LTW
安費諾亮泰企業股份有限公司