


SCHEMATIC

DERATING CURVE

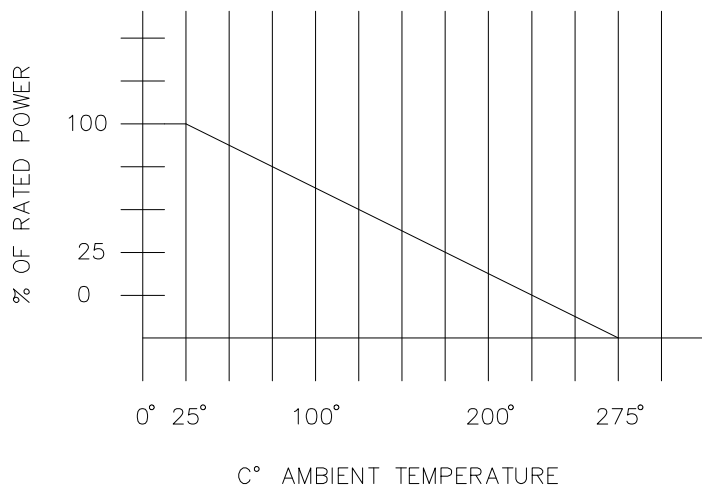

MODEL NUMBER	*RESISTANCE VALUE Ω
4391-50	50
4391-75	75
4391-600	600

### FEATURES:

- Use to add series resistance to coaxial lines with BNC connectors.

### MATERIAL:

Body and Fittings: Brass, Alloy 360, ½ Hard

Center Contact: Male – Brass, Alloy 360, ½ Hard

Female – Beryllium Copper per ASTM B196 and B197 Cond. HT

Outer Contact: Beryllium Copper, per ASTM B196 and B197 Cond. HT

Dielectric: Teflon per ASTM D1457

Gasket/Seals: Silicone rubber per ZZ-R-765, Class 11, Grade 50

Resistor: Non-inductive film resistor

Finish: Body and Fittings: Tarnish resistant

Center Contact: Male – Gold plated

Outer Contact: Tarnish resistant

Marking: “Pomona 4391-50 2W”

“50 Ohm Attenuator”

### RATINGS:

Operating Temperature: +102° C (+216° F) Max.

Frequency Range: DC to 500 MHz

Resistance Tolerance ±1%

Power: 2W @ 25° C Max.

### ORDERING INFORMATION: Model 4391

See table above.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ±.005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

**USA:** Sales: 800-490-2361

Fax: 425-446-5844

Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

**Europe:** 31-(0) 40 2675 150

**International:** 425-446-5500

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)