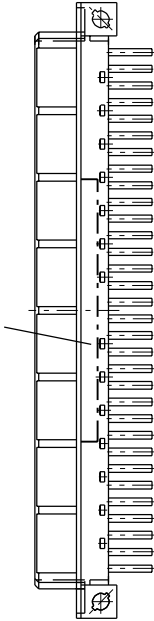







View on mating side									
C	C	C	C	C	C	C	C	C	C
B	B	B	B	B	B	B	B	B	B
A	A	A	A	A	A	A	A	A	A
N O Q R S T U V W X Y Z a b c d e f g h i j k l m n o p q r s t u v w x y z									
A = 32 contacts L=3.3									
B = 32 contacts L=3.3									
C = 32 contacts L=3.3									
S = 96 total number of contacts									
Area for marking									
									
Marking									
RNV 303 008 YY KW									
Performance level									
Contact area 3 um Au / Termination tin									
Flux proof									
no									
Fixing clip									
no									
Dimensions									
SDA-85325-0001 sht.1									
Technical Data									
PS-85325-0001									
C	LME Spec.	c1-32							
B	LME Spec.	c1-32							
A	LME Spec.	a1-32							
Contact symbol	Perform. level	Contact position number							
REVISE ONLY ON CAD SYSTEM									
SH. REV.									
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
TITLE									
96 pos. female connector									
LME RNV 303 008									
contacts arrangement									
SHEET NO. DATE									
1 OF 1 96/07/09									
PART NO. DWG NO.									
85325-0048 SDA-85325-0048									
SIZE									
A									

View on mating side									
C	C	C	C	C	C	C	C	C	C
B	B	B	B	B	B	B	B	B	B
A	A	A	A	A	A	A	A	A	A
N O P Q R S T U V W X Y Z a b c d e f g h i j k l m n o p q r s t u v w x y z									
A = 32 contacts L=3.3									
B = 32 contacts L=3.3									
C = 32 contacts L=3.3									
S = 96 total number of contacts									
Area for marking									
									
Marking									
RNVP 303 008 YY KW									
Performance level									
Contact area 3 um Au / Termination tin									
Flux proof									
no									
Fixing clip									
no									
Dimensions									
SDA-85325-0001 sht.1									
Technical Data									
PS-85325-0001									
C	LME Spec.	c1-32							
B	LME Spec.	c1-32							
A	LME Spec.	a1-32							
Contact symbol	Perform. level	Contact position number							
REVISE ONLY ON CAD SYSTEM									
SH. REV.									
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
TITLE									
96 pos. female connector									
LME RNVP 303 008									
contacts arrangement									
SHEET NO. DATE									
1 OF 1 96/07/09									
PART NO. DWG NO.									
SDA-85325-0048									
SIZE									
A									

View on mating side									
C	C	C	C	C	C	C	C	C	C
B	B	B	B	B	B	B	B	B	B
A	A	A	A	A	A	A	A	A	A
N O P Q R S T U V W X Y Z a b c d e f g h i j k l m n o p q r s t u v w x y z									
A = 32 contacts L=3.3									
B = 32 contacts L=3.3									
C = 32 contacts L=3.3									
S = 96 total number of contacts									
Area for marking									
									
Marking									
RNVP 303 008 YY KW									
Performance level									
Contact area 3 um Au / Termination tin									
Flux proof									
no									
Fixing clip									
no									
Dimensions									
SDA-85325-0001 sht.1									
Technical Data									
PS-85325-0001									
C	LME Spec.	c1-32							
B	LME Spec.	c1-32							
A	LME Spec.	a1-32							
Contact symbol	Perform. level	Contact position number							
REVISE ONLY ON CAD SYSTEM									
SH. REV.									
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
TITLE									
96 pos. female connector									
LME RNVP 303 008									
contacts arrangement									
SHEET NO. DATE									
1 OF 1 96/07/09									
PART NO. DWG NO.									
SDA-85325-0048									
SIZE									
A									

[illegible][illegible]

View on mating side									
C	C	C	C	C	C	C	C	C	C
B	B	B	B	B	B	B	B	B	B
A	A	A	A	A	A	A	A	A	A
N O Q R S T U V W X Y Z a b c d e f g h i j k l m n o p q r s t u v w x y z									
A = 32 contacts L=3.3									
B = 32 contacts L=3.3									
C = 32 contacts L=3.3									
S = 96 total number of contacts									
Area for marking									
									
Marking									
RNV 303 008 YY KW									
Performance level									
Contact area 3 um Au / Termination tin									
Flux proof									
no									
Fixing clip									
no									
Dimensions									
SDA-85325-0001 sht.1									
Technical Data									
PS-85325-0001									
C	LME Spec.	c1-32							
B	LME Spec.	c1-32							
A	LME Spec.	a1-32							
Contact symbol	Perform. level	Contact position number							
REVISE ONLY ON CAD SYSTEM									
SH. REV.									
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
TITLE									
96 pos. female connector									
LME RNV 303 008									
contacts arrangement									
SHEET NO. DATE									
1 OF 1 96/07/09									
PART NO. DWG NO.									
SDA-85325-0048									
SIZE									
A									

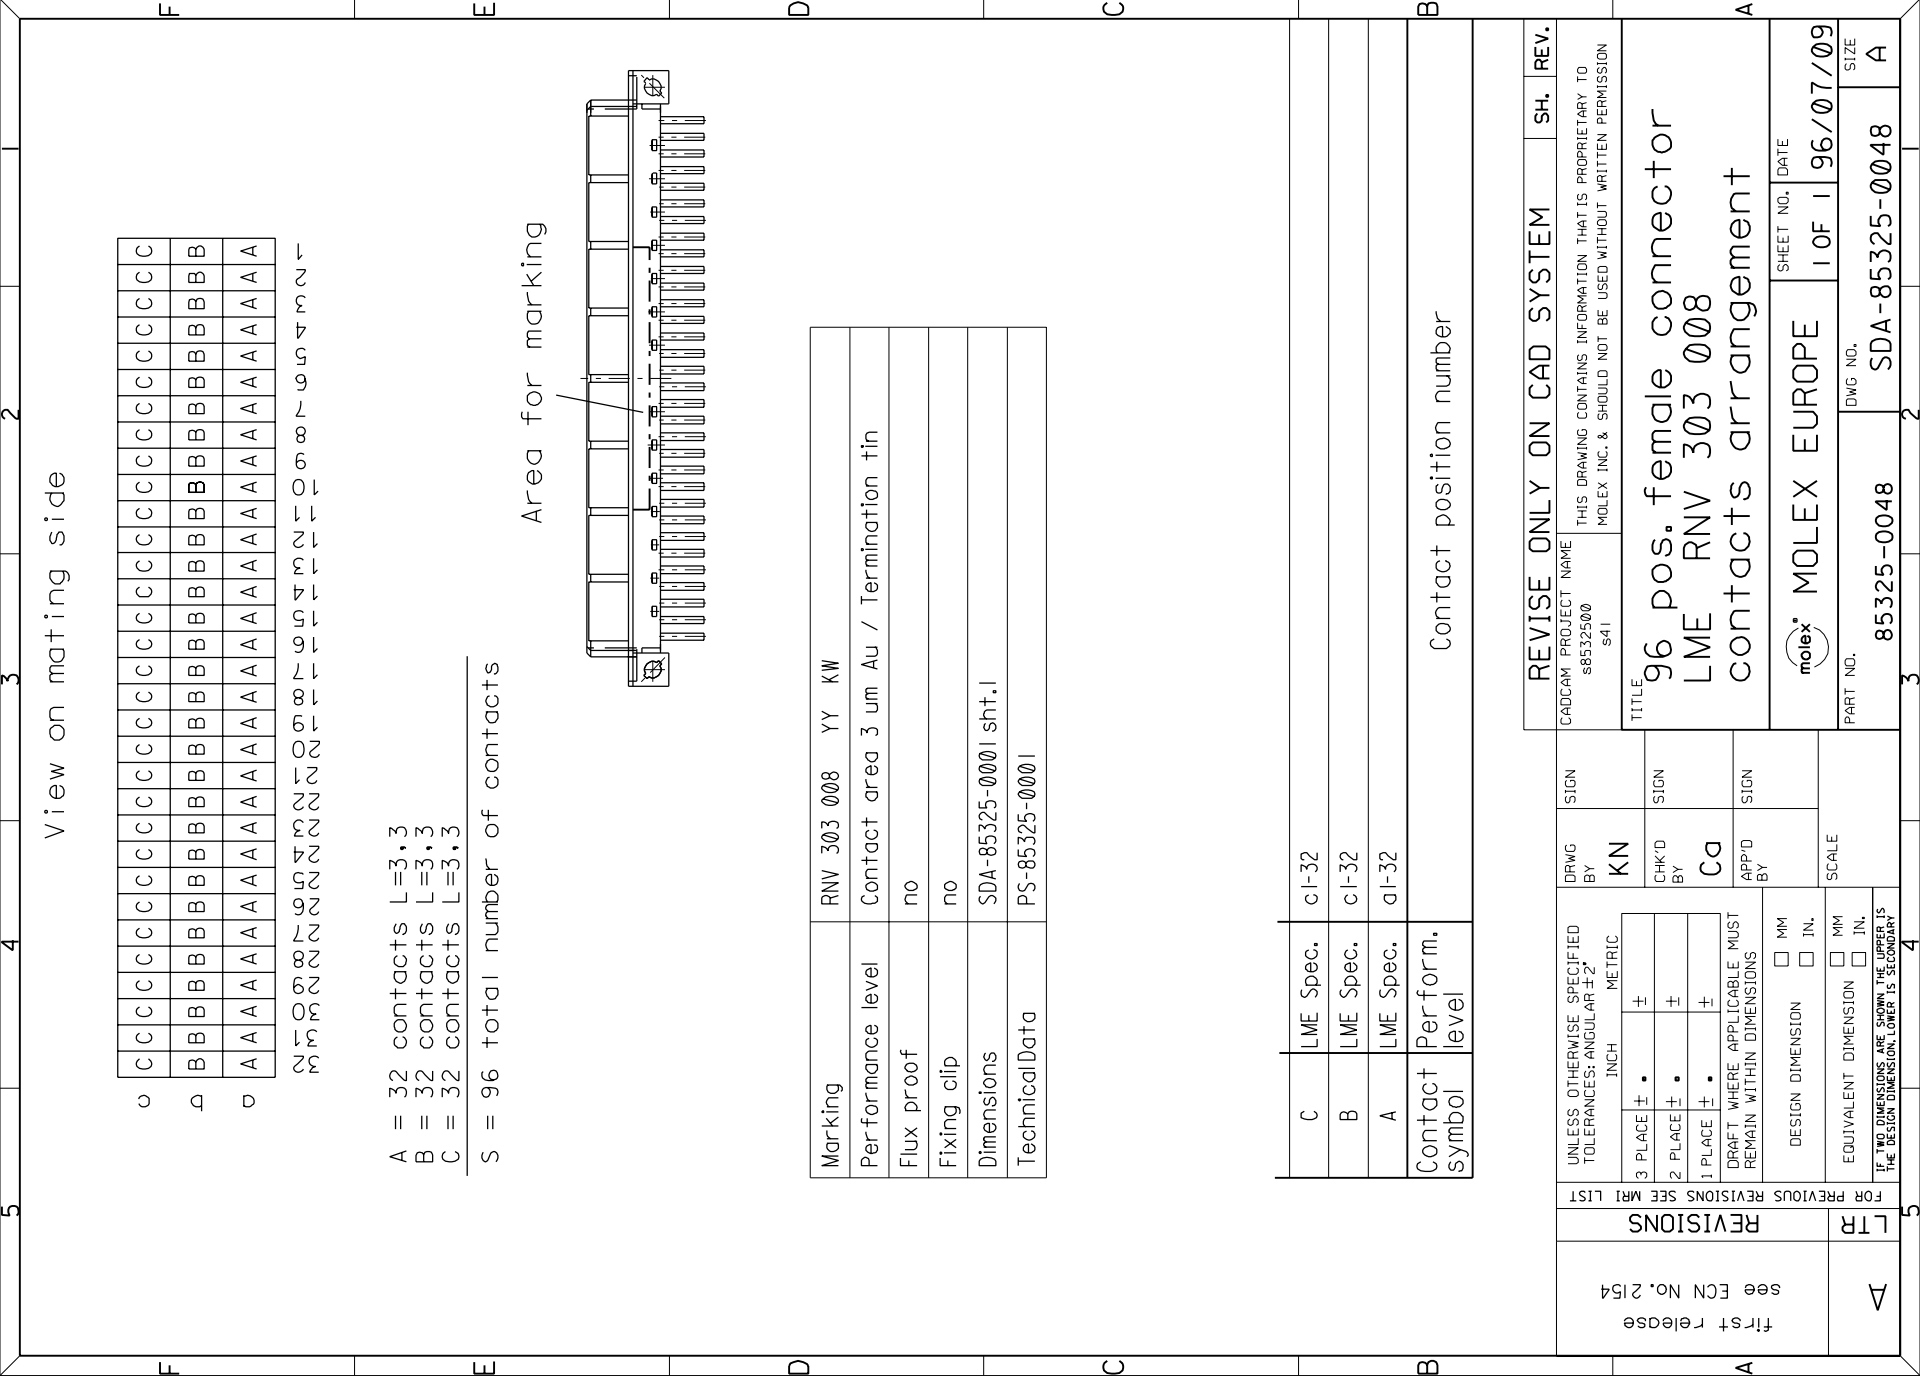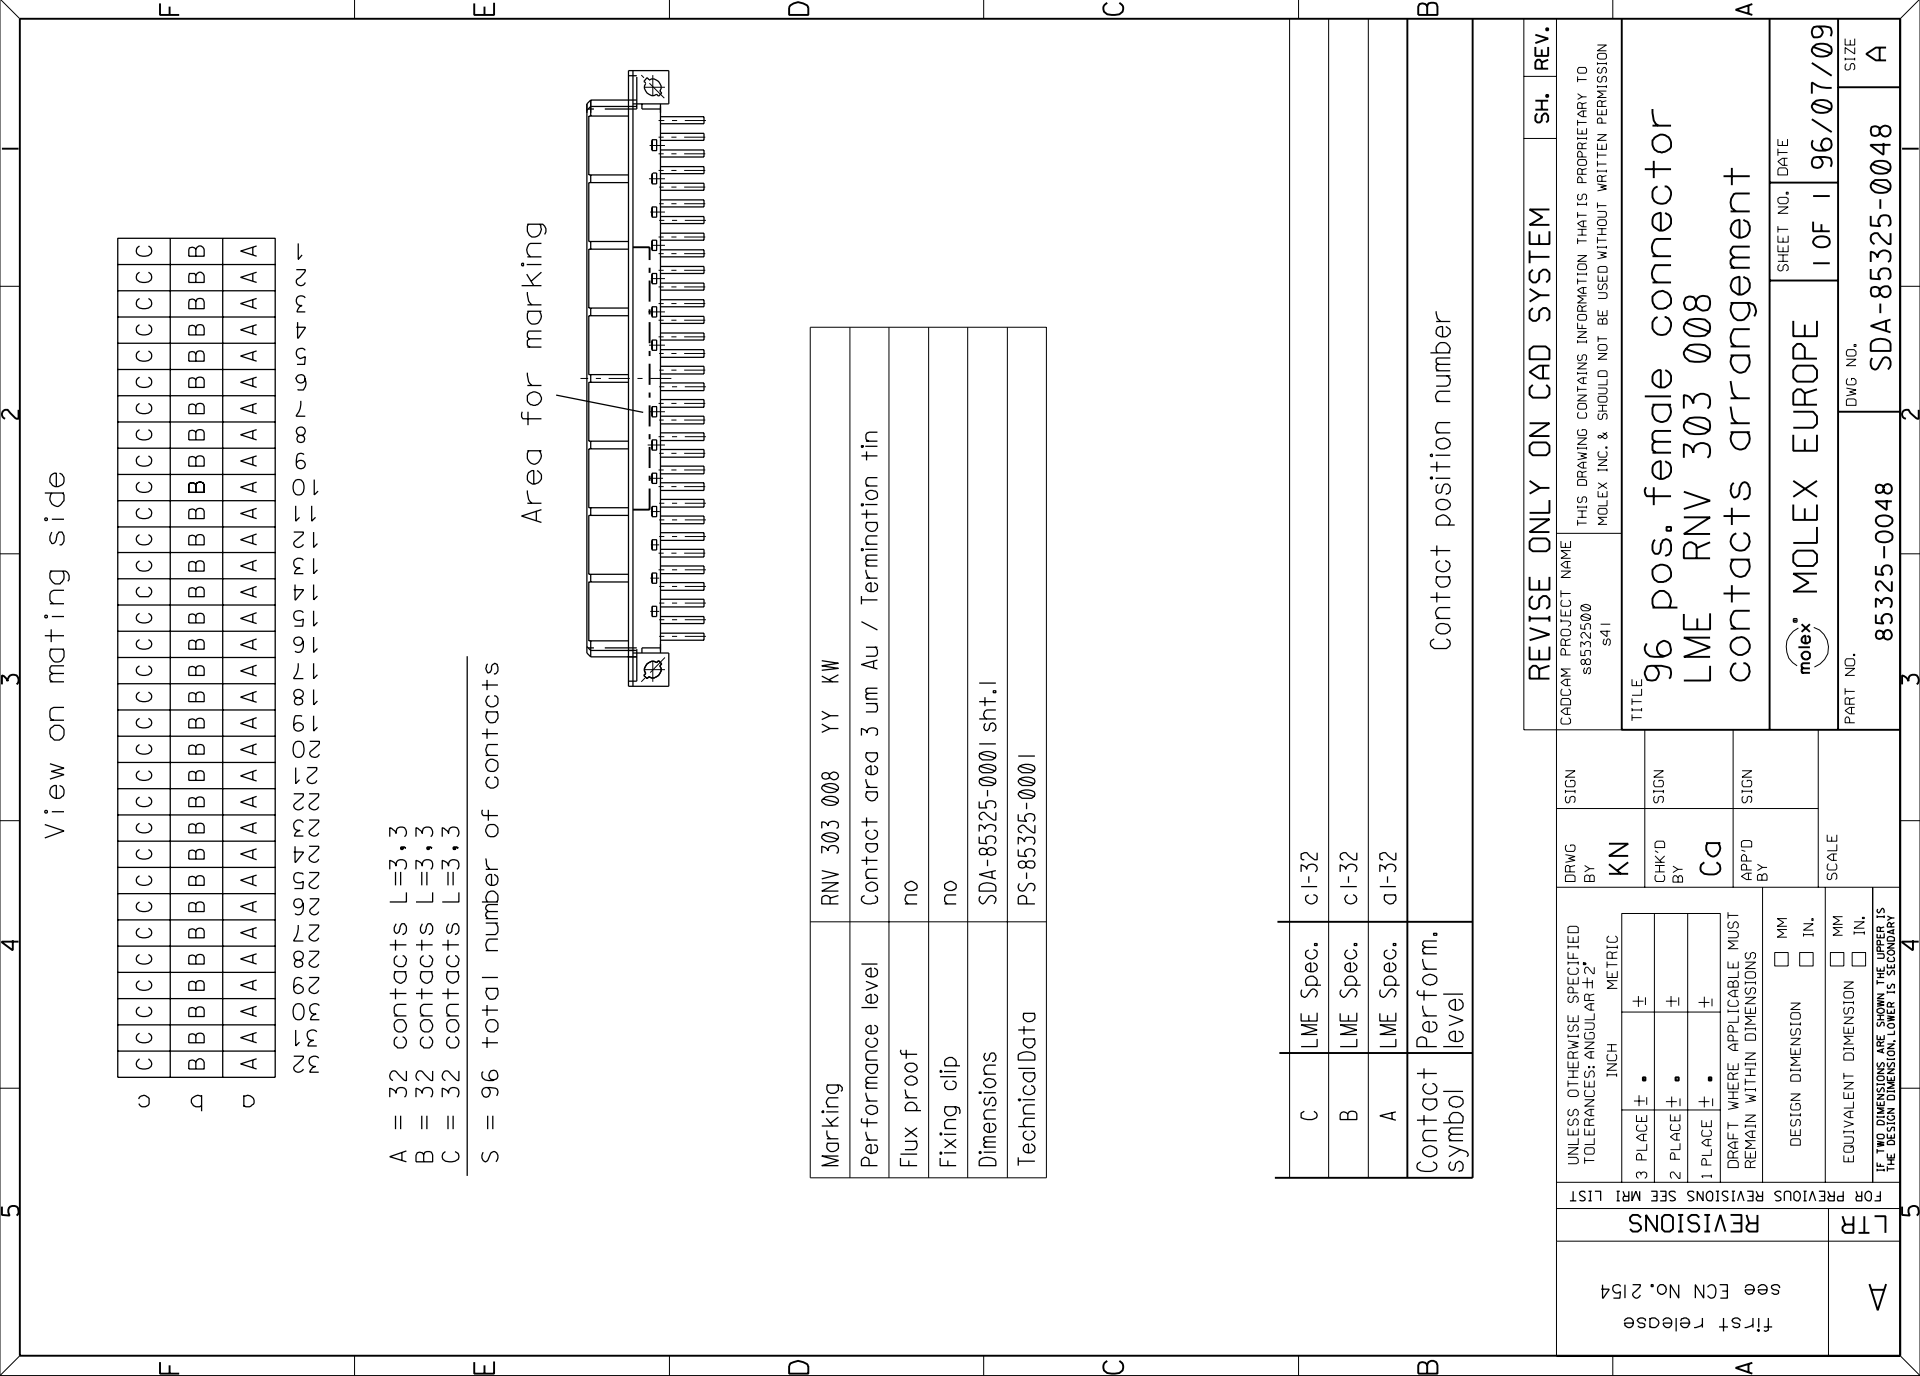[illegible][illegible][illegible]