

Fig. 1

- Series 335 and 435 single and double row PCB interconnects offer the lowest profile available .070".
- Series 364 and 464 single and double row PCB interconnects offer .085" profile above board.
- Series 335 and 435 use MM #3516 pins. See page 179 for details.
- Series 364 and 464 use MM #6458 pins. See page 180 for details.
- Insulators are high temp. thermoplastic.

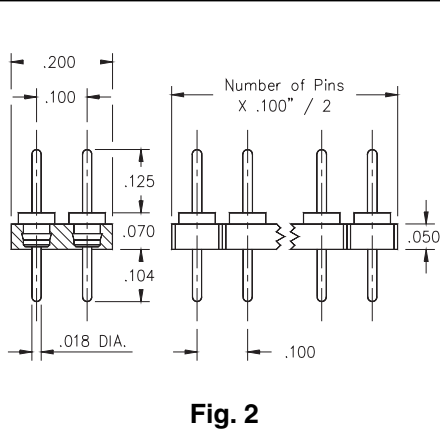
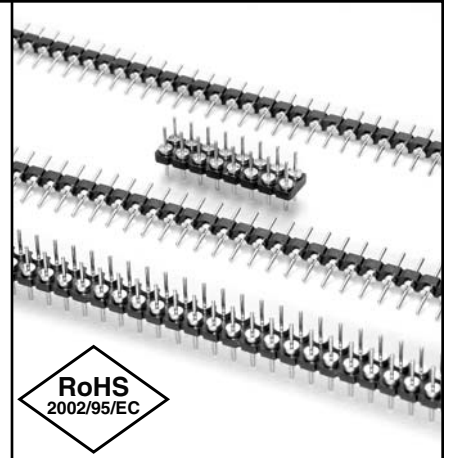


Fig. 2

Ordering Information

Fig. 1	Single Row	.070" Profile Pin Header
		335-XX-1__-00-160000 Specify # of pins → 01-32
Fig. 2	Double Row	.070" Profile Pin Header
		435-XX-2__-00-160000 Specify # of pins → 02-72
Fig. 3	Single Row	.085" Profile Pin Header
		364-10-1__-00-580000 Specify # of pins → 01-32
Fig. 4	Double Row	.085" Profile Pin Header
		464-10-2__-00-580000 Specify # of pins → 02-72

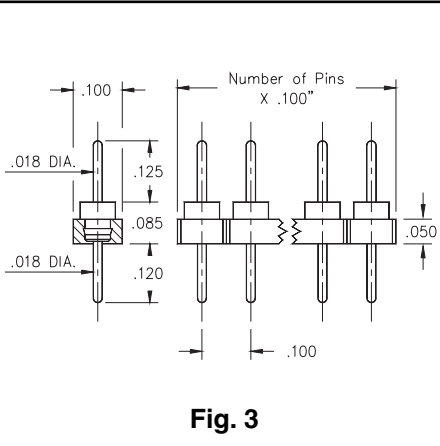


Fig. 3

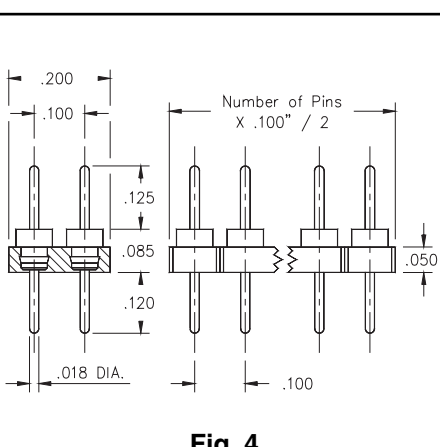


Fig. 4

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select ◊ plating code.

SPECIFY PLATING CODE XX=	10◊	90	40◊	
Pin Plating	10μ" Au	200μ" Sn/Pb	200μ" Sn	