


**Specifications:**

|                         |                                   |
|-------------------------|-----------------------------------|
| Sound level Category    | Medium Sound Level                |
| Mode of Operation       | Continuous                        |
| Mounting                | Panel (see note A)                |
| Voltage Rating          | 1 – 5 Vdc                         |
| Frequency               | 2900 Hz $\pm$ 500 Hz              |
| Loudness (Min. Voltage) | 55 dB(A) min. @ 2 FT and 1 Vdc    |
| Loudness (Max Voltage)  | 68 dB(A) min. @ 2FT and 5 Vdc     |
| Current Draw            | 3 mA Max @ 1 Vdc                  |
| Current Draw            | 12 mA Max @ 5 Vdc                 |
| Storage Temperature     | -40°C to +85°C                    |
| Operating Temperature   | -30°C to +65°C                    |
| Weight (Typical)        | 0.5 oz (17 g)                     |
| Housing                 | 6/6 Nylon, Color Black            |
| Options                 | For other options contact factory |

**RoHS Compliant**
**Dimensions:** Inches (mm)

NOTE A:  
MOUNTING - THIS PORTION  
SNAP-LOCKS INTO PANELS 1/32" TO  
1/8" THICK USING APPROPRIATE  
COMPRESSION WASHER.  
1.063  $\pm$ 0.005 DIA. PANEL HOLE REQ'D.

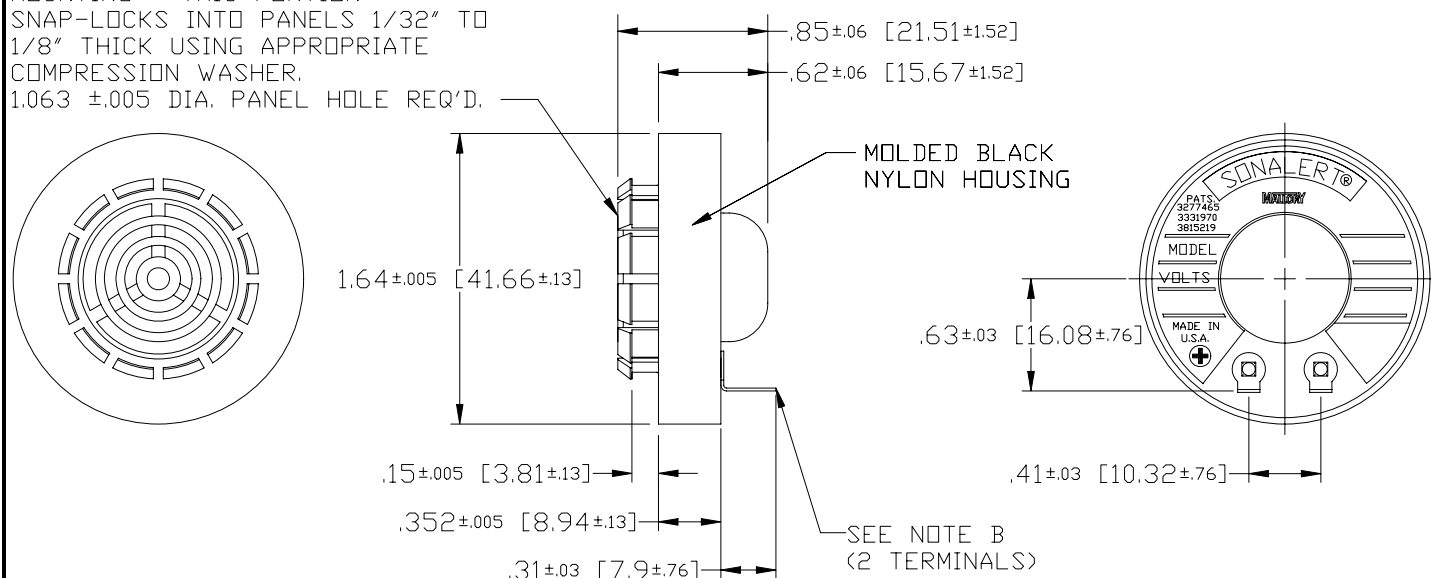

NOTE B:  
TERMINALS - .016 BRASS, HOT TIN FINISH WITH  
.076 WIRE HOLE. TERMINAL WILL ACCEPT  
STANDARD 1/8" QUICK CONNECT