

CATALOG LISTING
1EN1-11

1EN1-11

CATALOG LISTING

N

10

REVISIONS	
A	CO- 77504-A
S	A V
15	MAR 94

CHECK

CHECK

CHECK





94

MAR

15

5 A /

DDM/CAD

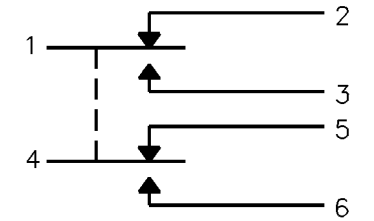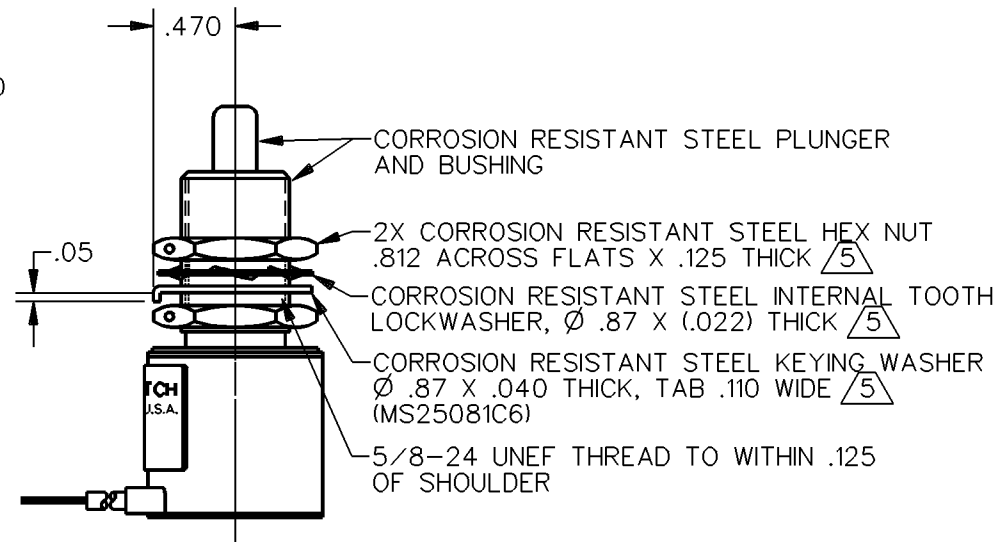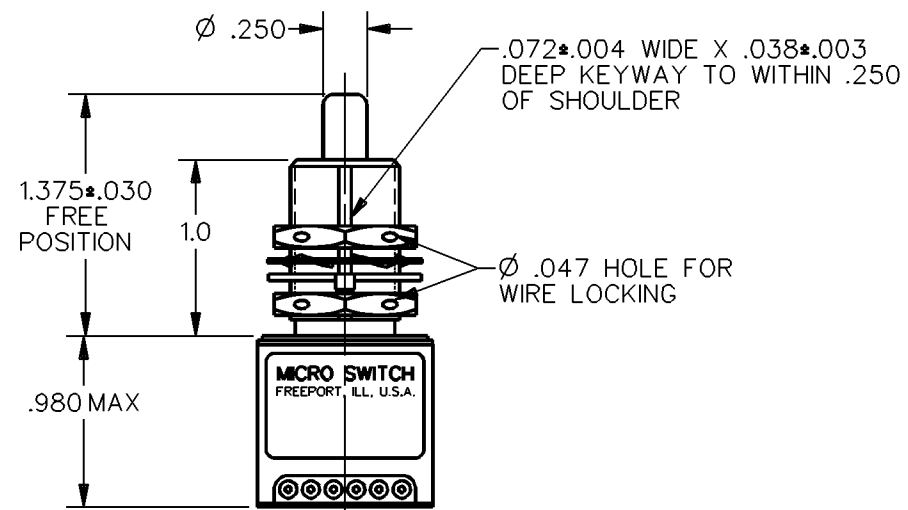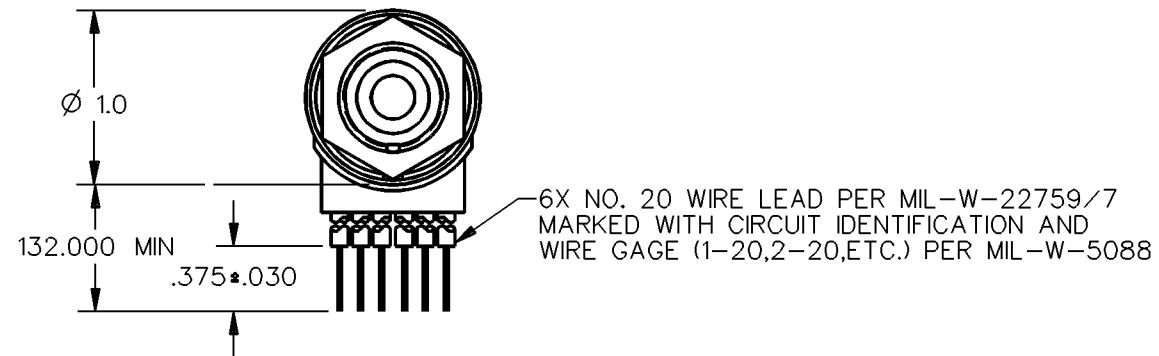

CIRCUIT DIAGRAM


NOTES

- 1 - CORROSION RESISTANT STEEL ENCLOSURE
2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4
3 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN
ON NAMEPLATE
4 - COINCIDENCE OF OPERATING AND RELEASING POINTS:
△ .010 OF PLUNGER TRAVEL

5 .010 OF PLUNGER TRAVEL
HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION



SCALE	FULL
-------	------

DO NOT SCALE PRINT

CHARACTERISTICS

OPERATING FORCE	— — — —	6-12 LB
FULL OVERTRAVEL FORCE	---	30 LB MAX
RELEASE FORCE	— — — — —	4 LB MIN
PRETRAVEL	— — — — —	.040 MAX
DIFFERENTIAL TRAVEL	— — —	.020 MAX
OVERTRAVEL	— — — — —	.250 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
2X S P D T

LOAD	28 VDC	
	SEA LEVEL	50,000 FT.
RES	4	4
IND	2	2
MOTOR	4	
LAMP		

**UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE**

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±
WEIGHT	10.0 OZ MAX	

ANSI Y14.5M-1982 APPLIES