



PRODUCT NUMBER
SEE SHEET 3

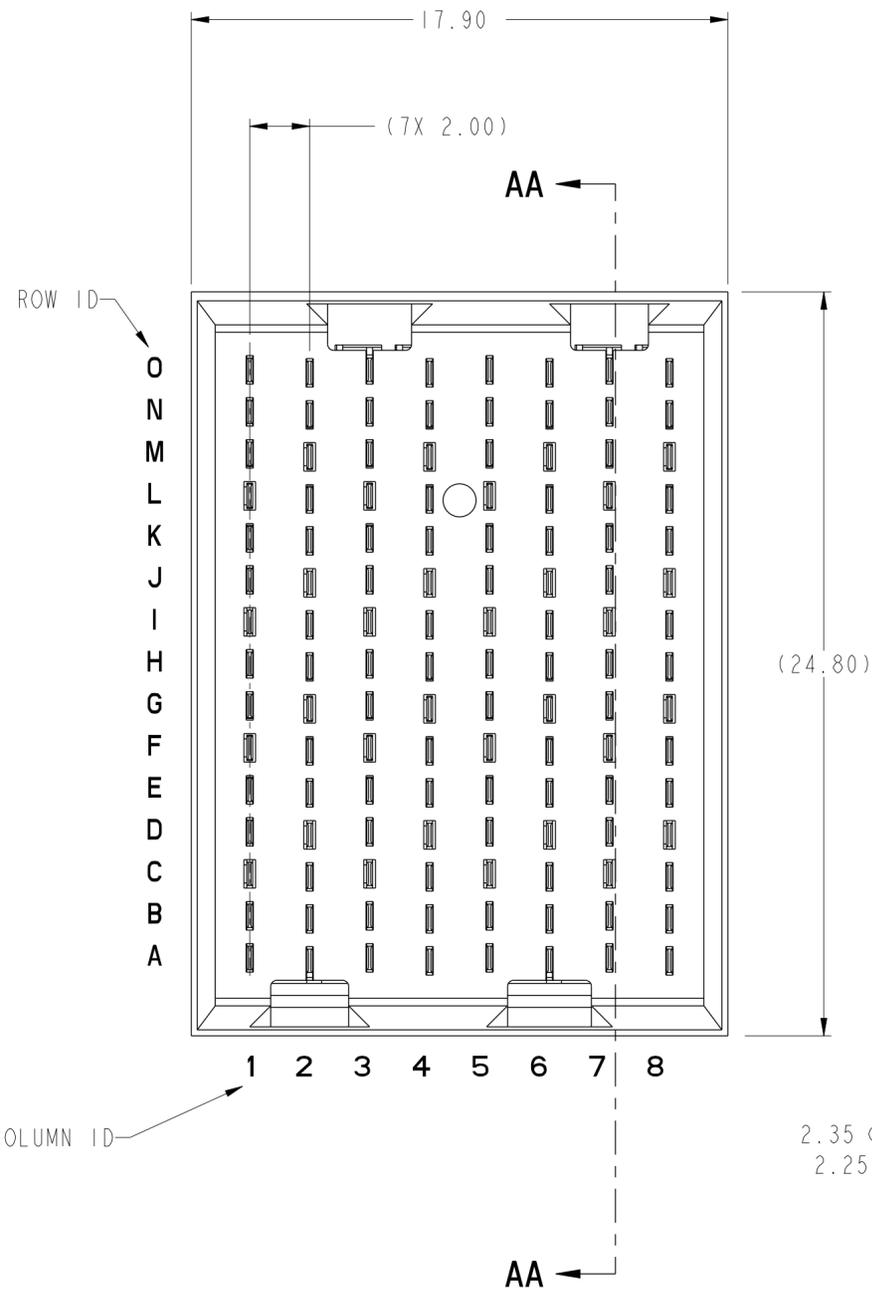

2.35 ϕ OF EVEN COLUMNS
2.25 ϕ OF ODD COLUMNS

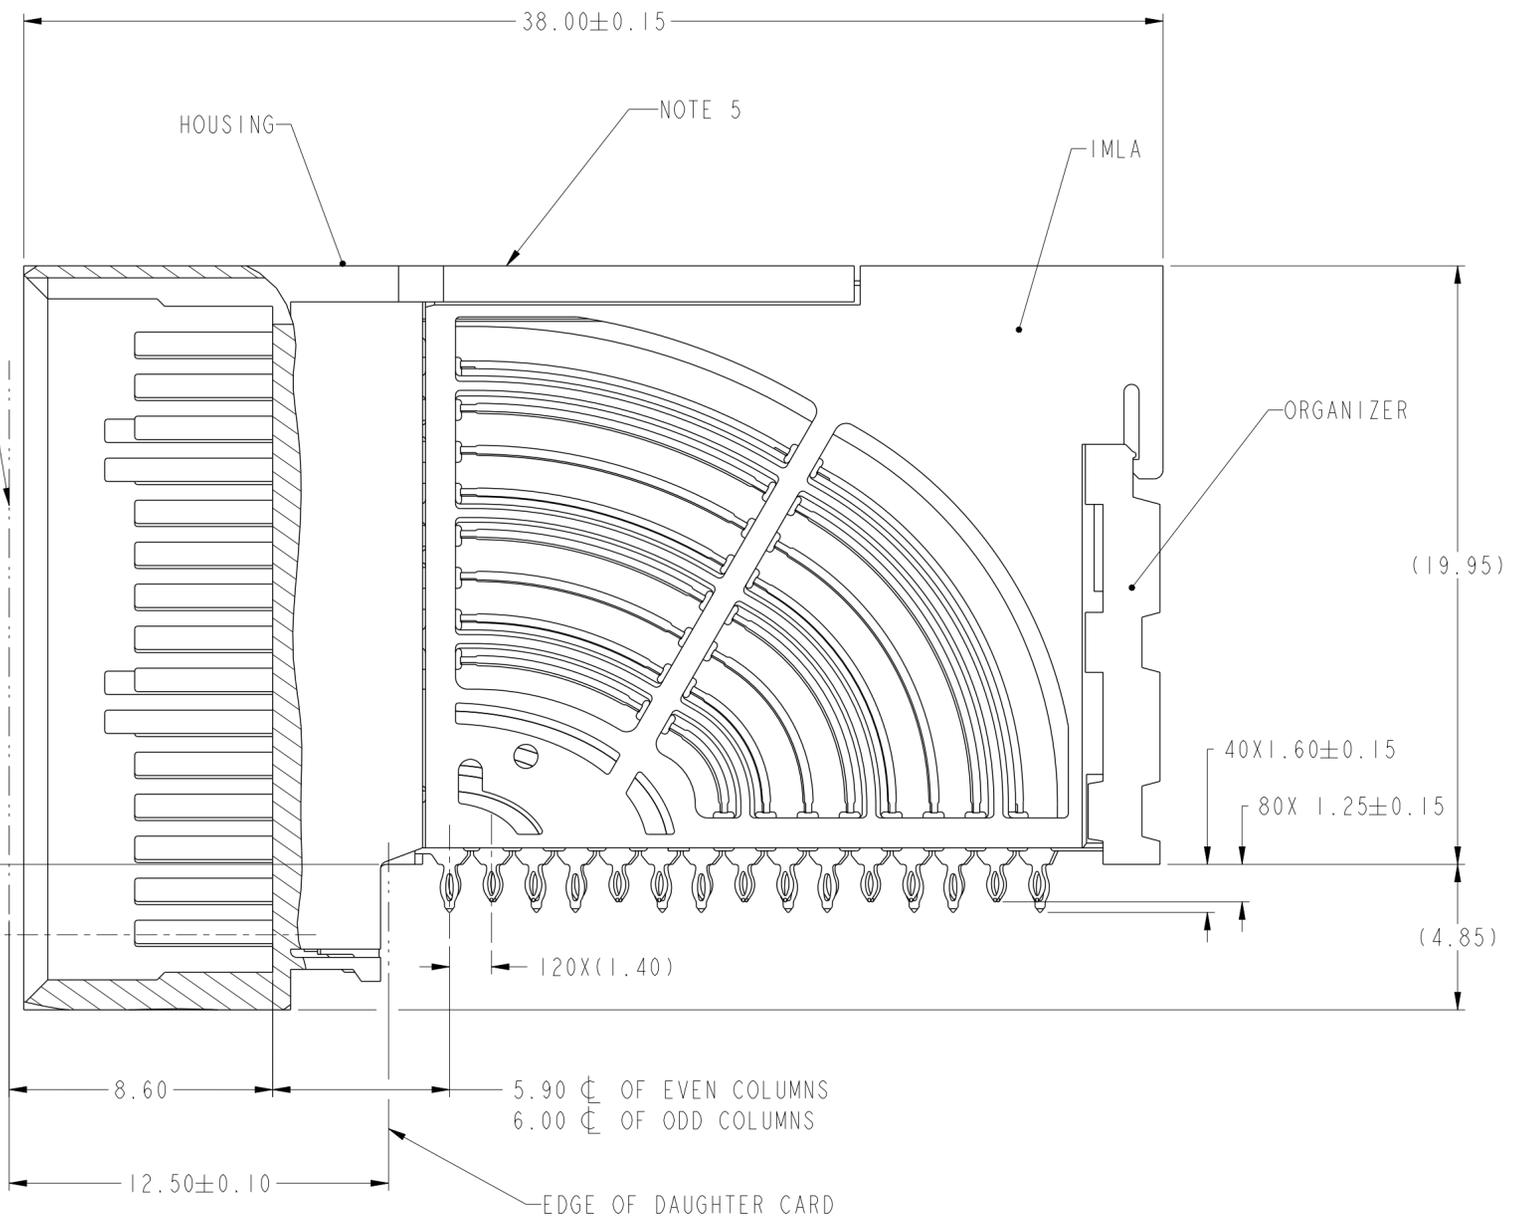


SECTION AA-AA

NOT TOOLED

PRELIMINARY

spec ref	---	dr	Tao Zhan	2015/10/13	projection	MM	size	A2	scale	10:1
tolerance std	ASME Y14.5M	eng	Tao Zhan	2016/03/15			ecn no	-	rel level	Preliminary
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	app						
surface	-	linear	0.X	±.3		AIRMAX VS2 RA HEADER 5 PAIR 120 POS 2MM 8 COL SMALL PRESS FIT	dwg no	10136595	rev	1
			0.XX	±.10						
		angular	0°	±2°						
		cat. no.	-		Product - Customer Drw		sheet 1 of 3			

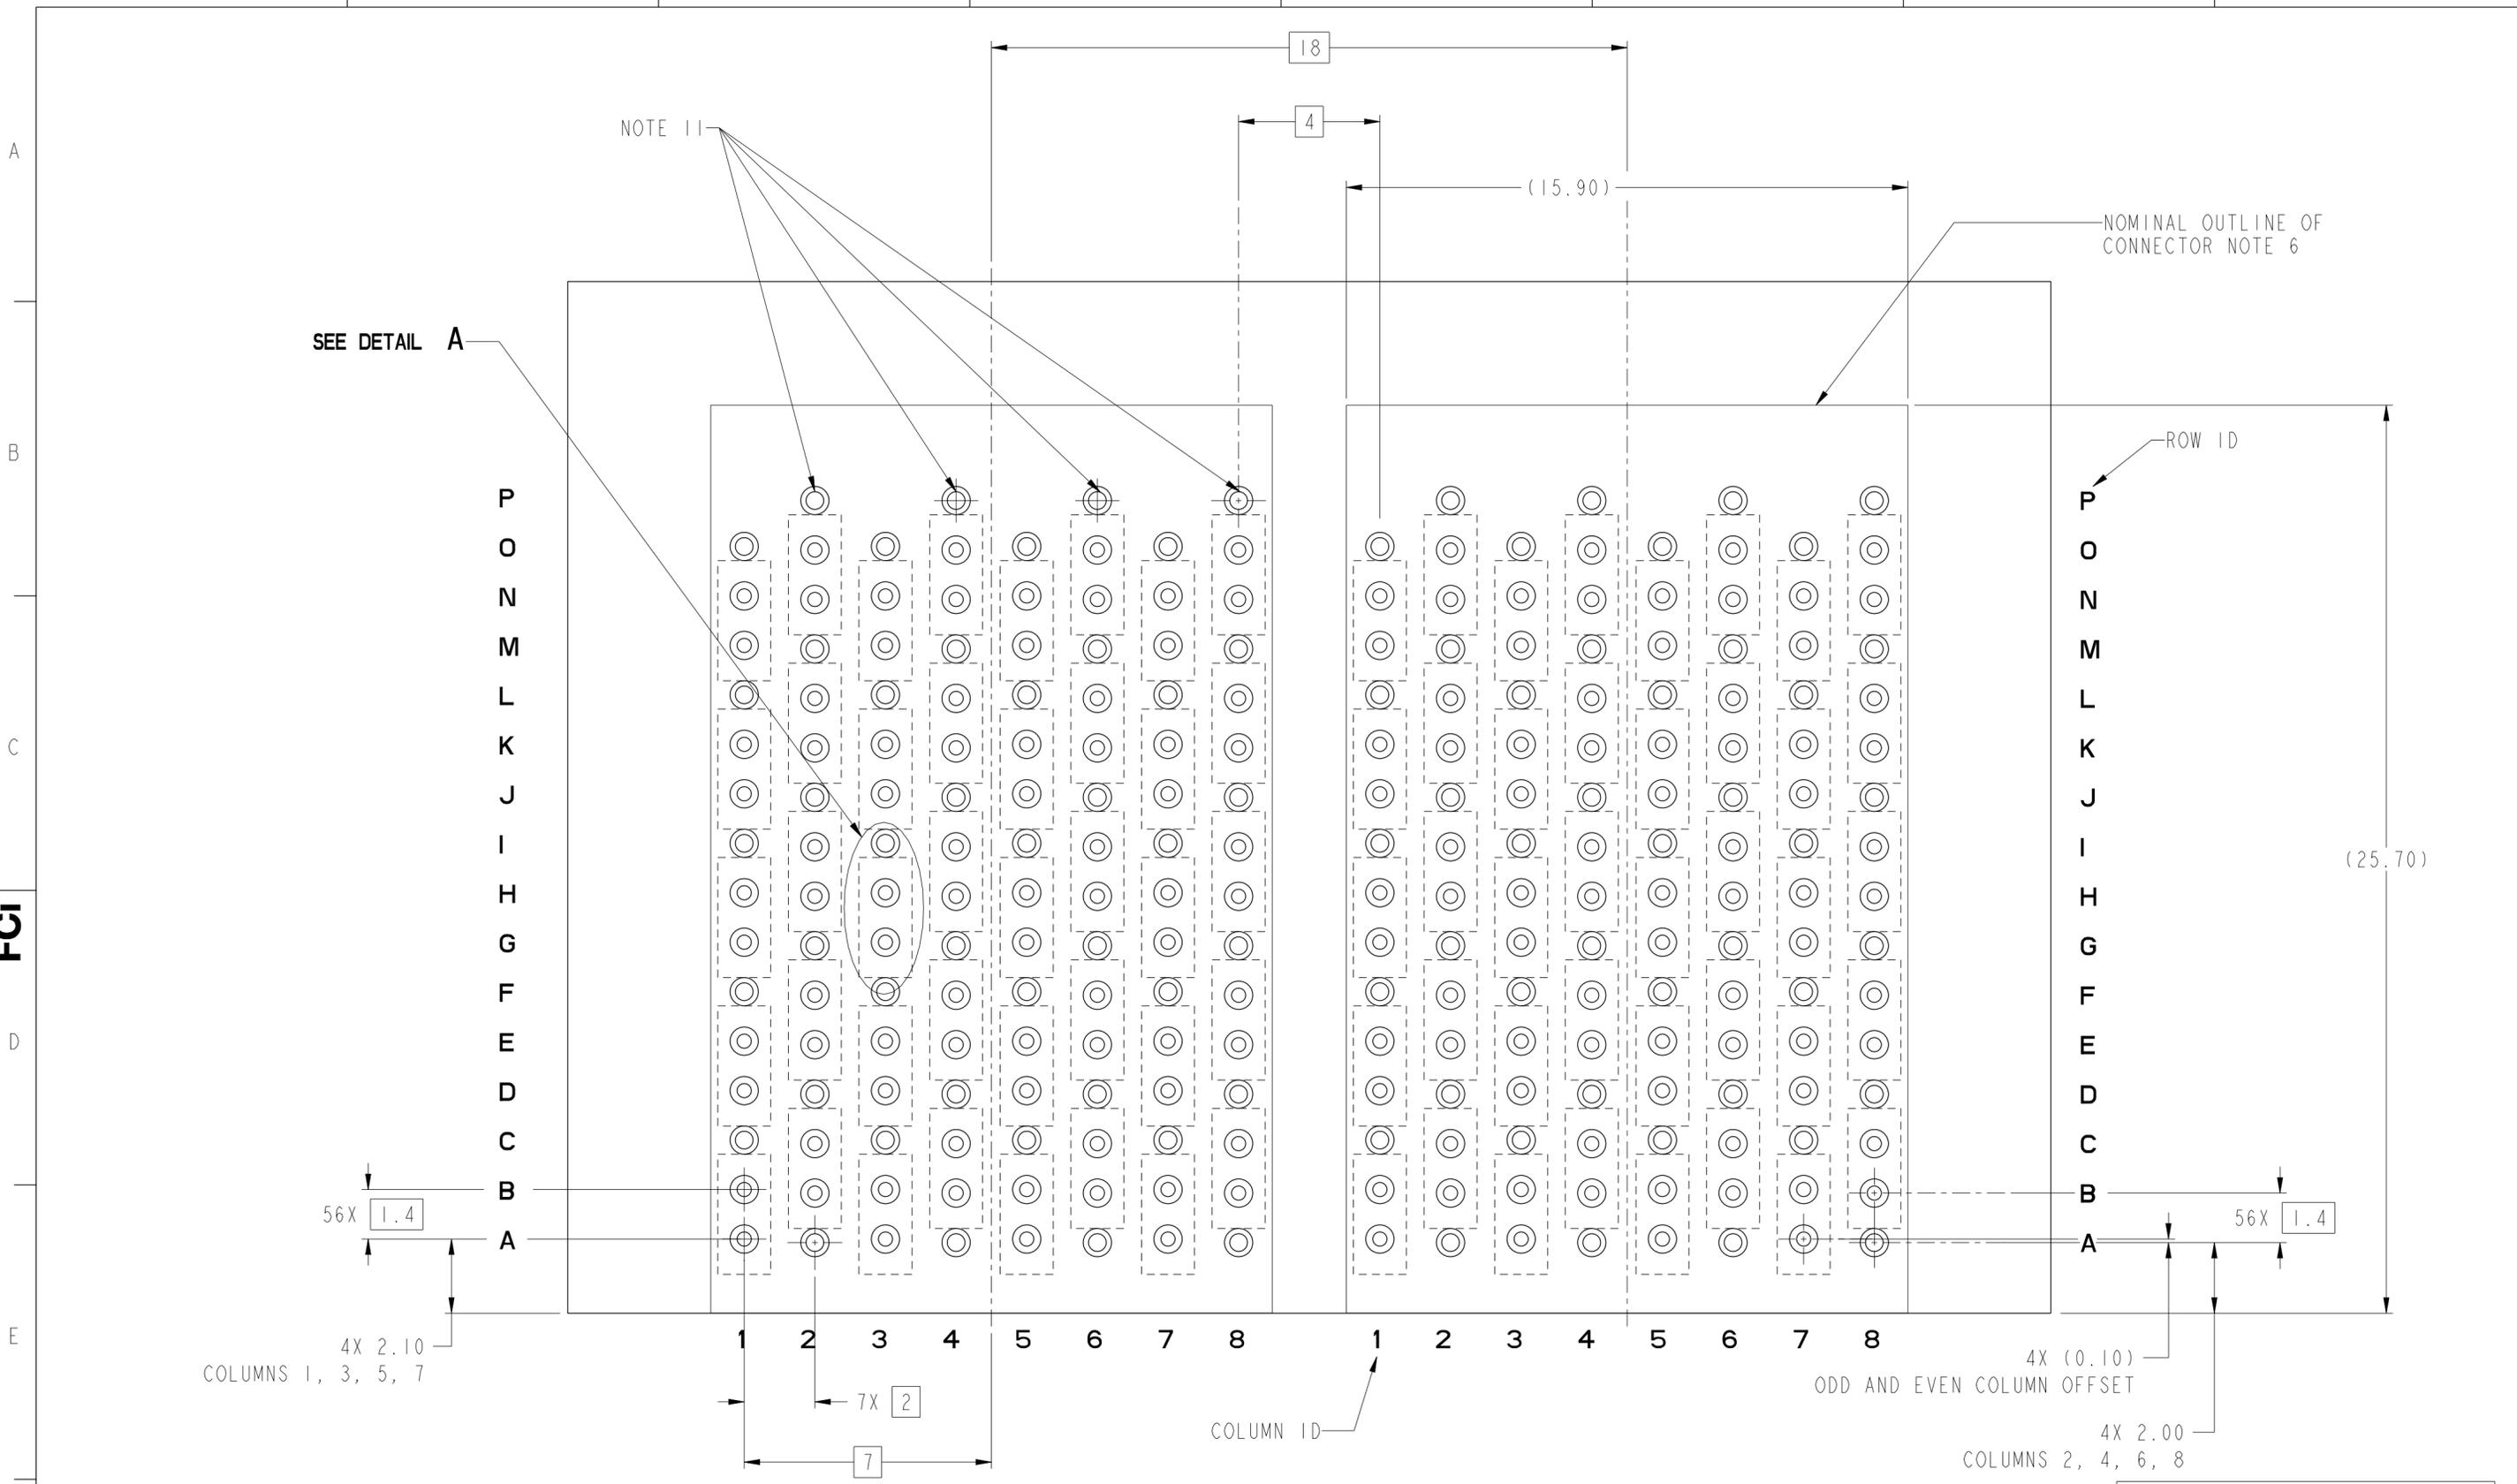

4X 2.10
COLUMNS 1, 3, 5, 7

4X (0.10)
ODD AND EVEN COLUMN OFFSET

4X 2.00
COLUMNS 2, 4, 6, 8

RECOMMENDED PCB LAYOUT
FOR DIFFERENTIAL APPLICATIONS
COMPONENT SIDE
(TWO ADJACENT FOOTPRINTS SHOWN)
NOTES 7 & 10


SCALE 8:1

PRELIMINARY

spec ref	---	dr	Tao Zhan	2015/10/13	projection	MM	size	A2	scale	8:1
tolerance std	ASME Y14.5M	eng	Tao Zhan	2016/03/15			ecn no	-	rel level Preliminary	rev 1
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	cat. no.			-	Product - Customer Drw		
surface	-	linear	0.X	±.3	Amphenol FCI AIRMAX VS2 RA HEADER 5 PAIR 120 POS 2MM 8 COL SMALL PRESS FIT		title 10136595	drwg no 10136595	sheet 2 of 3	rev 1
		angular	0°	±2°						


PRODUCT NUMBER	PRESS-FIT TAIL PLATING TYPE	REMARKS
10136595-101LF	TIN OVER NICKEL (LEAD FREE)	1-SIDE PLATING CUSTOMER SPECIAL
10136595-102LF	TIN OVER NICKEL (LEAD FREE)	2-SIDES PLATING

- 1 - CONNECTOR MATERIALS:
HOUSING: HIGH TEMP THERMOPLASTIC, NATURAL, UL94-V0
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
CONTACT: COPPER ALLOY
ORGANIZER: HIGH TEMP THERMOPLASTIC, NATURAL, UL94-V0
- 2 - CONTACT PLATING:
SEPARABLE INTERFACE:
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-0956 INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE TEST SEQUENCE
- PRESS-FIT TAILS: SEE TABLE
- 3 - PRODUCT SPECIFICATION: GS-12-0956
- 4 - APPLICATION SPECIFICATION: GS-20-0305
- 5 - PRODUCT MARKING, (PROTOTYPE, PART NUMBER & LOT CODE), ON THIS SURFACE.
- 6 - CONNECTOR OUTLINE MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO BE USED AS A GUIDE FOR CONNECTOR PLACEMENT.
- 7 - REFER TO CUSTOMER DRAWING 10104444 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS
- 8 - LEAD FREE PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES & OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 9 - PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.
- 10 - GROUND CONTACTS (C, F, I, L, & O IN ODD COLUMNS AND A, D, G, J, & M IN EVEN COLUMNS) REQUIRE (Ø0.500) FINISHED HOLES. SIGNAL LOCATIONS REQUIRE (Ø0.400) FINISHED HOLES
- 11 - THESE OUTER VIAS (P) ARE OPTIONAL. WHILE NO CONNECTOR EONS ARE PRESSED INTO THESE HOLES WE RECOMMEND (Ø0.500) FINISHED HOLES AT THESE LOCATIONS TO PROVIDE GROUND SYMMETRY THROUGH THE PCB.
- 12 - A \triangle SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE, WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

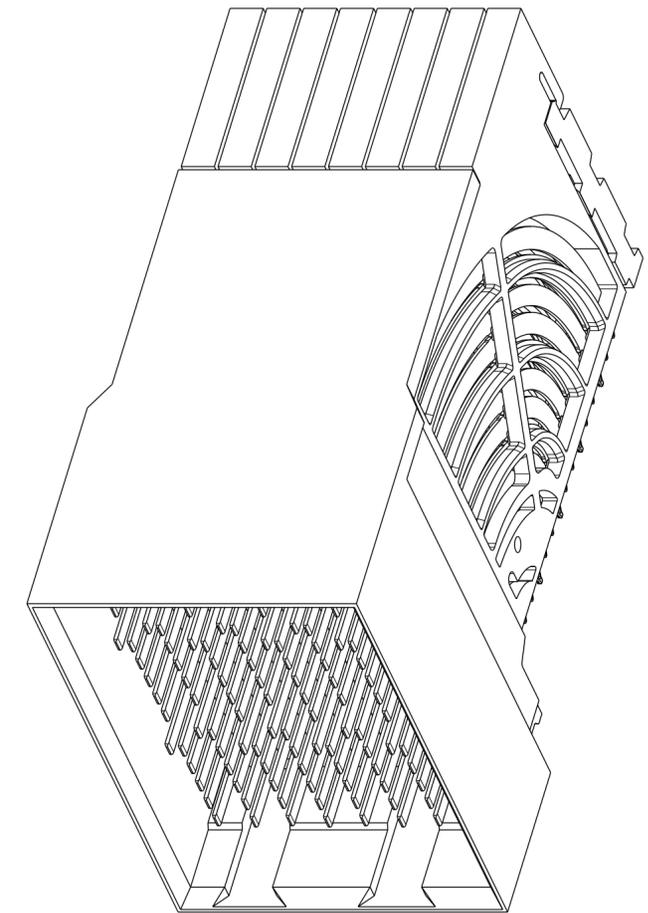

10136595-101LF

SCALE 4:1

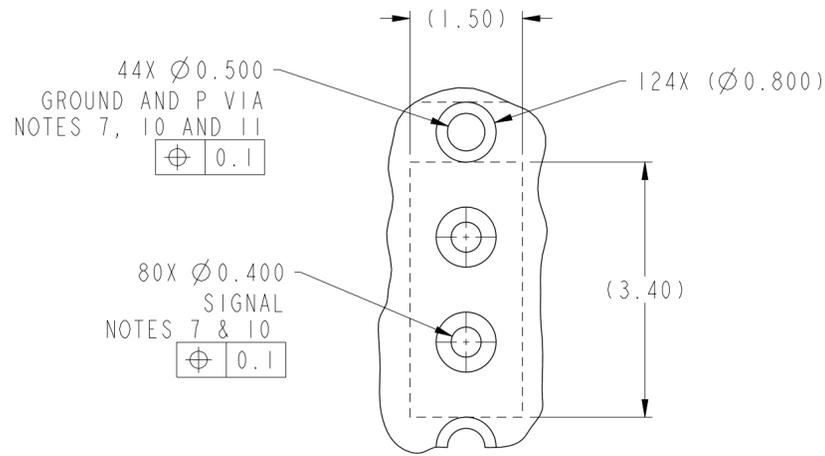

DETAIL A
SCALE 15:1

PRELIMINARY

spec ref	---	dr	Tao Zhan	2015/10/13	projection	MM	size	A2	scale	8:1
tolerance std	ASME Y14.5M	eng	Tao Zhan	2016/03/15	chr	-	ecn no	-	rel level	Preliminary
surface	-	appr	-	-	product family	-	cat. no.	-	Product - Customer Drw	sheet 3 of 3
		linear	0.X	±.3	Amphenol FCI	title	AIRMAX VS2 RA HEADER	dwg no	10136595	rev
			0.XX	±.10			5 PAIR 120 POS 2MM 8 COL SMALL PRESS FIT			1
		angular	0°	±2°						