
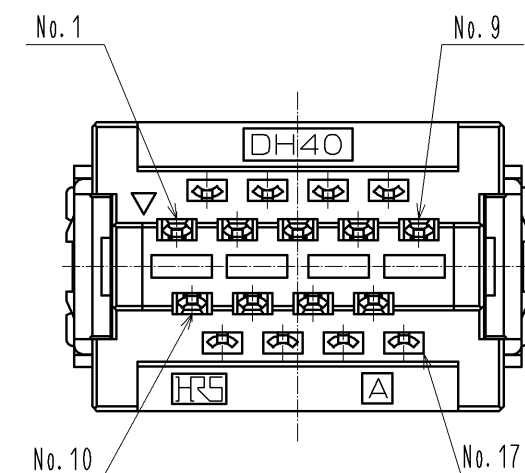
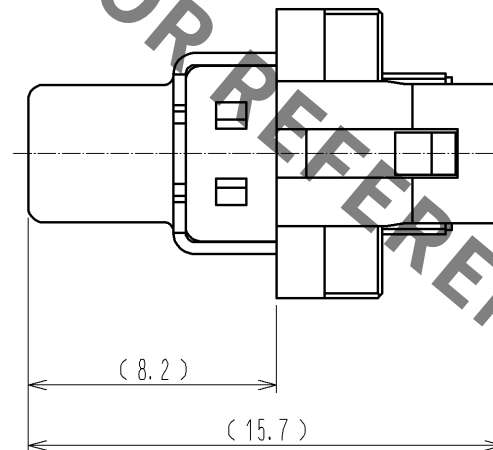
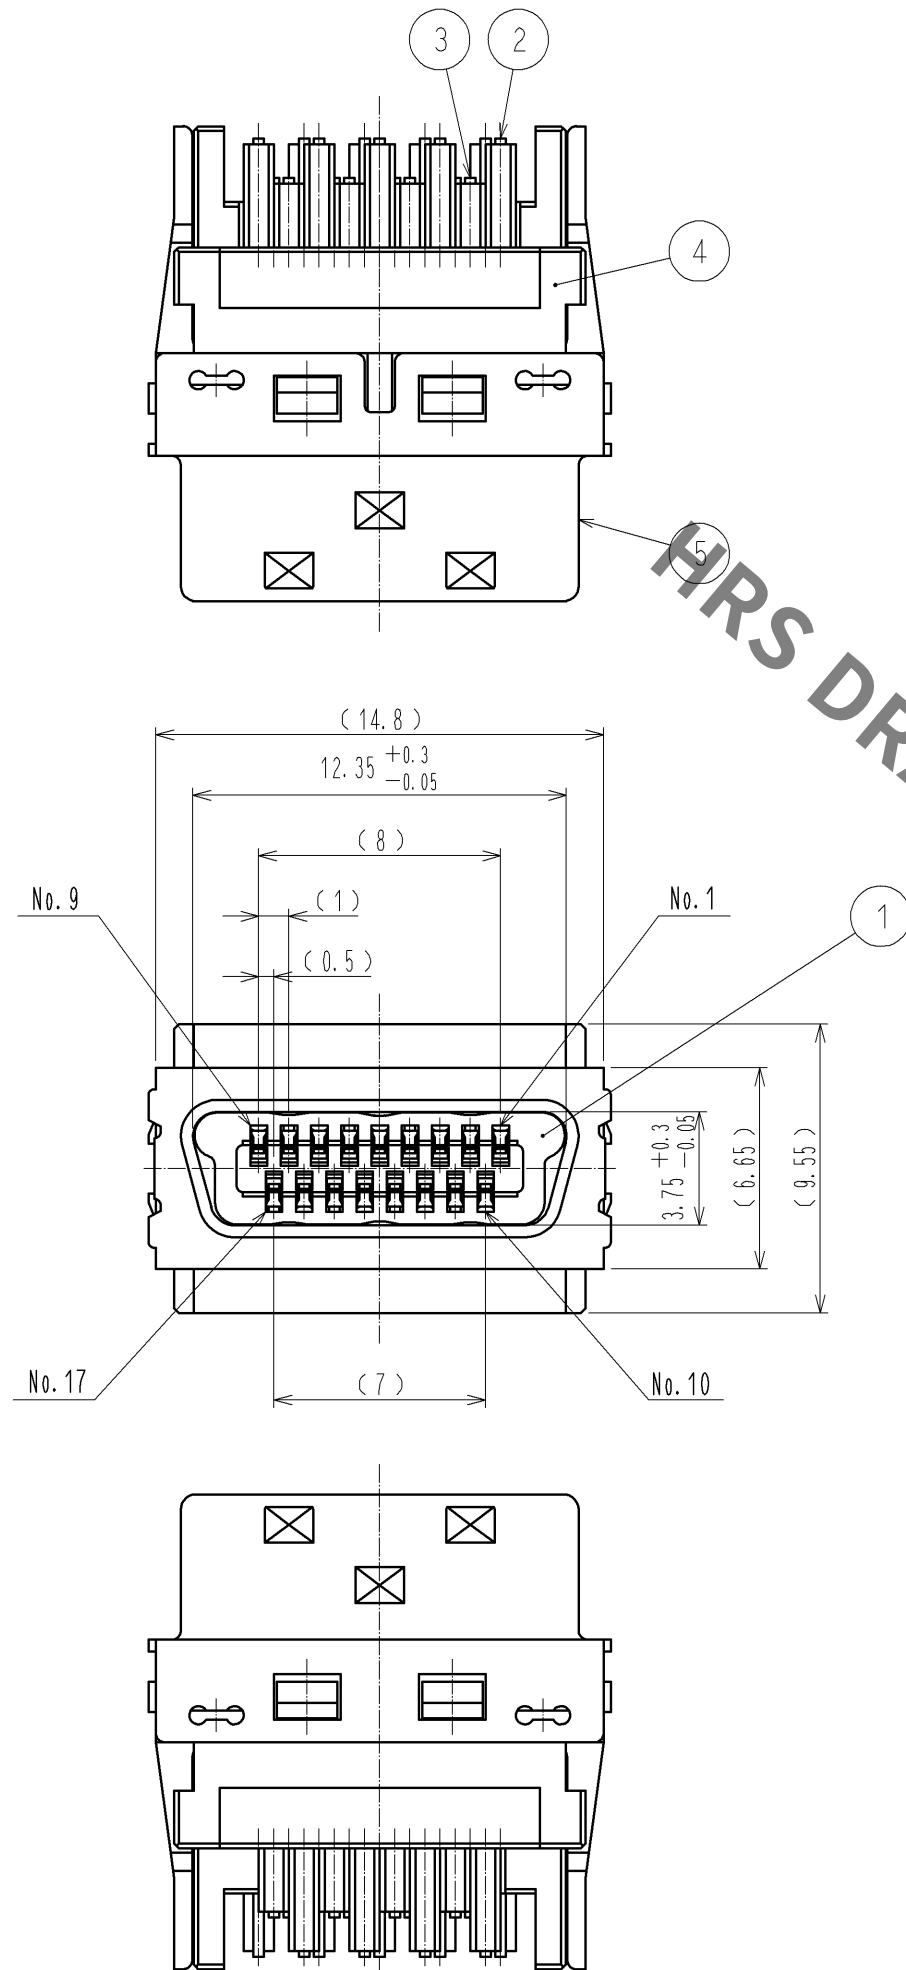


Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



NOTE 1 .THIS PRODUCT SHALL BE MATED WITH A 'DH**-17P*'.
2 .THIS PRODUCT SHALL BE USED ASSEMBLED TO A COVER CASE
'DH-17-C***' AND A CLAMP 'DH-17-CM*(***)'.

3	COPPER ALLOY	CONTACT AREA :GOLD 0.2 μm MIN		5	STAINLESS STEEL	PLATING:NICKEL 1 μm MIN		
2		INSULATION DISPLACEMENT AREA:GOLD 0.03 μm MIN UNDER PLATING :NICKEL 1 μm MIN						
1	POLYAMID	BLACK, UL94V-0		4	POLYAMID	BLACK, UL94V-0		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 4 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :A0. SUZUKI		10.10.06	DRAWING NO. EDC3-127106-00			
		CHECKED :YH. ENAMI		10.10.06	PART NO. DH40-17S			
		DESIGNED :YH. MAMADA		10.10.01	CODE NO. CL244-0054-0-00			
		DRAWN :YH. MAMADA		10.10.01	 1/1			